


Service Manual

42 inch Class 1080p Plasma HDTV

Model No. TH-42PZ80U

GPF11DU Chassis

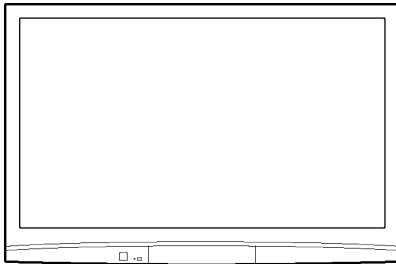

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.



1 Safety Precautions

1.1. General Guidelines

1. When conducting repairs and servicing, do not attempt to modify the equipment, its parts or its materials.
2. When wiring units (with cables, flexible cables or lead wires) are supplied as repair parts and only one wire or some of the wires have been broken or disconnected, do not attempt to repair or re-wire the units. Replace the entire wiring unit instead.
3. When conducting repairs and servicing, do not twist the Faston connectors but plug them straight in or unplug them straight out.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.1.1. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between 1Mohm and 5.2Mohm. When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

1.1.2. Leakage Current Hot Check (See Figure 1.)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 1.5kohm, 10 watts resistor, in parallel with a 0.15 μ F capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

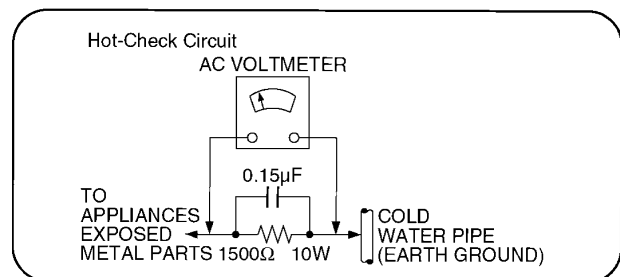


Figure 1

2 Warning

2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor [chip] components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).


1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as [anti-static (ESD protected)] can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise hamless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

2.2. About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).


That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol **PbF** stamped on the back of PCB.




Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

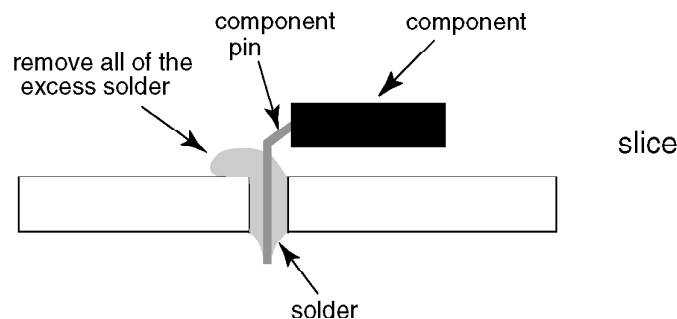

Suggested Pb free solder



There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

0.3mm X 100g	0.6mm X 100g	1.0mm X 100g
		

3 Service Navigation

3.1. Service Hint

Remove the Rear cover

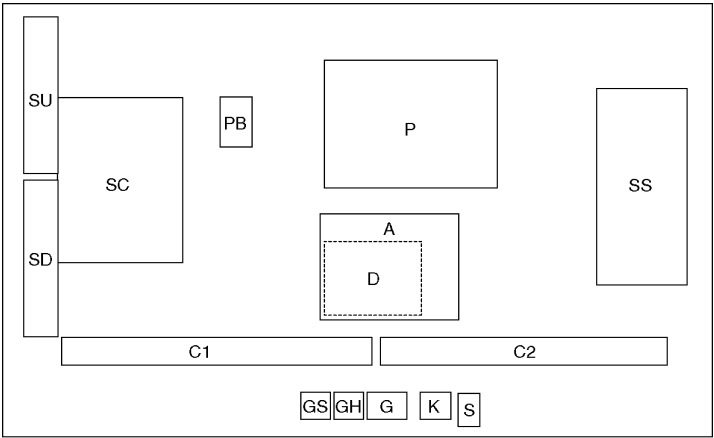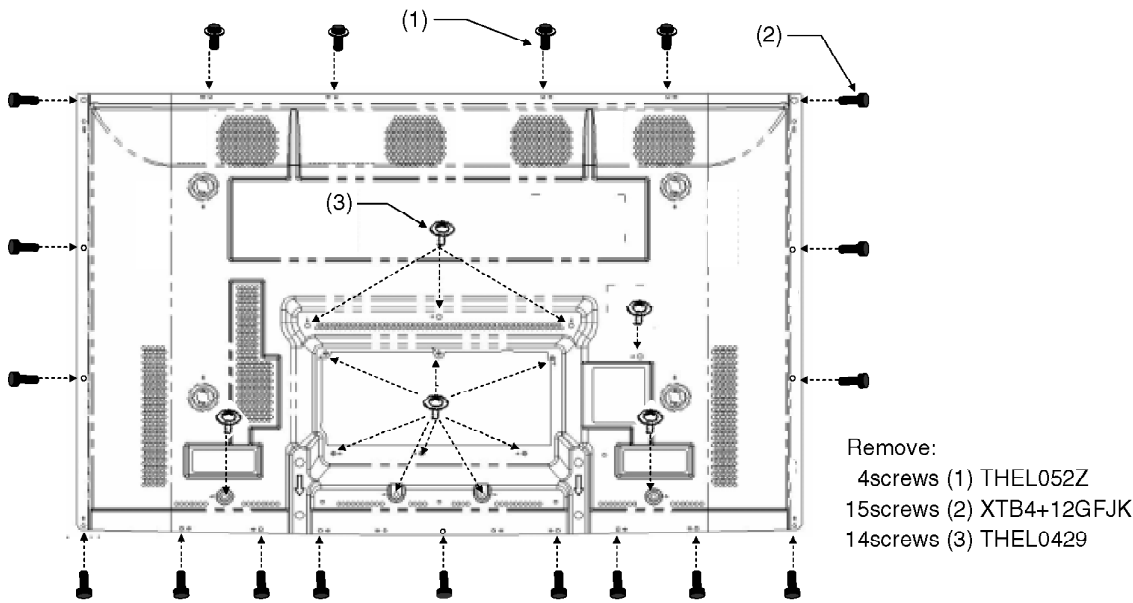

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Lower Right)
A	DC-DC Converter Speaker out, Sound Processor AV Terminal, AV Switch Digital Signal Processor, Micon, HDMI Interface Peaks Lite 2p	C2	Data Driver (Lower Left)
		SC	Scan Drive
		SU	Scan out (Upper)
		SD	Scan out (Lower)
		SS	Sustain Drive
D	Format Converter, Plasma AI, Sub-Field Processor	GH	HDMI3 in
K	Remote receiver, Power LED	G	Front Terminal, Key Switch
S	Power Switch	PB	Fan control
GS	SD Card Slot		

3.2. Applicable signals

* Mark: Applicable input signal for Component (Y, PB, PR) and HDMI

	horizontal frequency (kHz)	vertical frequency (Hz)	COMPONENT	HDMI
525 (480) / 60i	15.73	59.94	*	*
525 (480) /60p	31.47	59.94	*	*
750 (720) /60p	45.00	59.94	*	*
1,125 (1,080) /60i	33.75	59.94	*	*
1,125 (1,080) /60p	67.43	59.94		*
1,125 (1,080) /60p	67.50	60.00		*
1,125 (1,080) /24p	26.97	23.98		*
1,125 (1,080) /24p	27.00	24.00		*

Note

- Signals other than those shown above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.

4 Specifications

Power Source	AC 120 V, 60 Hz	
Power Consumption		
Maximum	573 W	
Standby condition	0.2 W	
Plasma Display panel		
Drive method	AC type	
Aspect Ratio	16:9	
Visible screen size	42 inch class (41.6 inches measured diagonally)	
(W × H × Diagonal)	36.2 inch × 20.4 inch × 41.6 inch (922 mm × 518 mm × 1,057 mm)	
(No. of pixels)	2,073,600 (1,920 (W) × 1,080 (H))[5,760 × 1,080 dots]	
Sound		
Audio Output	20 W [10 W + 10 W] (10 % THD)	
Channel Capability (Digital/Analog)	VHF/ UHF: 2 - 69, CATV: 1 - 135	
Operating Conditions		
	Temperature:	32 °F - 104 °F (0 °C - 40 °C)
	Humidity:	20 % - 80 % RH (non-condensing)
Connection Terminals		
VIDEO IN 1-2	VIDEO:	RCA PIN Type × 1 1.0 V [p-p] (75 Ω)
	S-VIDEO:	Mini DIN 4-pin Y: 1.0 V [p-p] (75 Ω) C: 0.286 V [p-p] (75 Ω)
	AUDIO L-R:	RCA PIN Type × 2 0.5 V [rms]
COMPONENT INPUT 1-2	Y:	1.0 V [p-p] (including synchronization)
	P _B , P _R :	±0.35 V [p-p]
	AUDIO L-R:	RCA PIN Type × 2 0.5 V [rms]
HDMI 1-3	TYPE A Connector × 3	
	This TV supports [HDAVI Control 3] function.	
Card slot	SD CARD slot × 1	
AV PROG OUT	VIDEO:	RCA PIN Type × 1 1.0 V [p-p] (75 Ω)
	AUDIO L-R:	RCA PIN Type × 2 0.5 V [rms]
DIGITAL AUDIO OUT	PCM / Dolby Digital, Fiber Optic	
FEATURES		
	3D Y/C FILTER	
	CLOSED CAPTION	V-Chip
	Photo Viewer	HDAVI Control 3
Dimensions (W × H × D)		
Including pedestal	41.3 inch × 28.7 inch × 12.9 inch (1,048 mm × 727 mm × 327 mm)	
TV Set only	41.3 inch × 26.8 inch × 3.8 inch (1,048 mm × 679 mm × 95 mm)	
Mass		
Including pedestal	70.6 lb. (32 kg)	
TV Set only	66.1 lb. (30 kg)	


Note

- Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.

5 Service Mode

5.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the main unit, press [INFO] button of the remote control three times within 2 seconds.

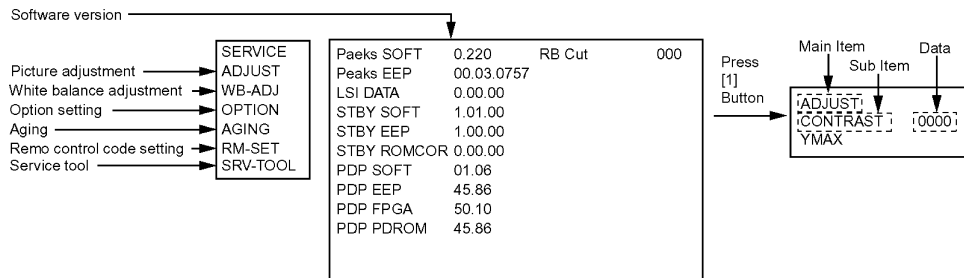

5.1.1. Key command

- [1] button...Main items Selection in forward direction
- [2] button...Main items Selection in reverse direction
- [3] button...Sub items Selection in forward direction
- [4] button...Sub items Selection in reverse direction
- [VOL] button...Value of sub items change in forward direction (+), in reverse direction (-)

5.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample Data	Remark
ADJUST	CONTRAST	000	
	COLOR	3C	
	TINT	03	
	SUB-BRT	800	
WB-ADJ	R-CUT	80	
	G-CUT	80	
	B-CUT	80	
	R-DRV	FC	
	G-DRV	F8	
	B-DRV	D9	
	ALL-CUT	80	
	ALL-DRV	FC	
OPTION	BOOT	ROM	Factory Preset
	STBY-SET	00	
	EMERGENCY	ON	
	CLK MODE	00	
	CLOCK	000	
AGING	RGBW		
	COUNT		
	ALL WHITE		
	ALL RED		
	ALL GREEN		
	ALL BLUE		
	ON/OFF		
	RAMP WHITE		
	RAMP RED		
	RAMP GREEN		
	RAMP BLUE		
	1% WINDOW		
	COLOR BAR		
	A-ZONE B-ZONE/4 TRIO		
	SCROLL		
	WHITE FLAME		
RM-SET	CODE	A	Fixed
SRV-TOOL	-		See next

5.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

5.2. Service tool mode

5.2.1. How to access

1. Select [SRV-TOOL] in Service Mode.
2. Press [OK] button on the remote control.

	SRV-TOOL	
Display of TD2Microcode version →	TD2Microcode:81c0000e	
Display of Flash ROM maker code →	Flash ROM : 1 - 227E	
Display of SOS History →	PTCT : 00 . 00 . 00 . 00 . 00	Time 00000:40 Count 0000022

POWER ON TIME/COUNT
Press [MUTE] button (3sec)

5.2.2. Display of SOS History

SOS History (Number of LED blinking) indication.

From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.

This indication except 2nd and 1st occurrence after shipment will be cleared by [Self-check indication and forced to factory shipment setting].

5.2.3. POWER ON TIME/COUNT

Note : To display TIME/COUNT menu, highlight position, then press MUTE for (3sec).

Time : Cumulative power on time, indicated hour : minute by decimal

Count : Number of ON times by decimal

Note : This indication will not be cleared by either of the self-checks or any other command.

5.2.4. Exit

1. Disconnect the AC cord from wall outlet.

5.3. Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command to the Hotel mode setup menu

In order to display the Hotel mode setup menu, please enter the following command **(within 2 second)**.

[TV] : Vol. [Down] + [REMOTE] : TV/VIDEO (3 times)

Then, the Hotel mode setup menu is displayed.

Hotel Mode

Mode	Off
Input	-
Channel	-
Volume	+ 25
Vol. Max	+ 100
OSD Ctrl	Off
FP Ctrl	Off
Pow Ctrl	Off

Select Change RETURN

3. To exit the Hotel mode setup menu

Disconnect AC power cord from wall outlet.

4. Explain the Hotel mode setup menu

item	Function
Mode	Select hotel mode ON/OFF
Input	Select input signal modes. Set the input, when each time power is switched on. Selection: -/RF/COMP1/COMP2/HDMI1/HDMI2/HDMI3/VIDEO1/VIDEO2 • Off: give priority to a last memory.
Channel	Select channel when input signal is RF. Set the channel, each time power is switched on. Selection: Any channel number or [-]. [-] means the channel when turns off.
Volume	Adjust the volume when each time power is switched on. Range: 0 to 100
Vol. Max	Adjust maximum volume. Range: 0 to 100
OSD Ctrl	Restrict the OSD. Selection: OFF/PATTERN1 • OFF: No restriction • PATTERN1: restriction
FP Ctrl	Select front key conditions. Selection: Off/Pattern1/All • Off: altogether valid. • Pattern: only input key is valid. • All: altogether invalid.
Pow Ctrl	Select POWER-ON/OFF condition when AC power cord is disconnected and then connected. OFF: The same condition when AC power cord is disconnected. ON: Forced power ON condition.

6 Troubleshooting Guide

Use the self-check function to test the unit.

1. Checking the IIC bus lines
2. Power LED Blinking timing

6.1. Check of the IIC bus lines

6.1.1. How to access

Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [OK] button on the remote control for more than 3 seconds.

Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

6.1.2. Exit

Disconnect the AC cord from wall outlet.

6.1.3. Screen display

SELF CHECK		0.220- 00.03.0757	
PEAKS	OK	TEMP	OK
TUN1	OK	PANEL	OK
TUN2	OK		
FE	OK		
AVSW	OK		
ADV	OK		
ADAV	OK		
GenX	OK		
MEM1	OK		
MEM2	OK		
Copyright 2008 Matsushita Electric Industrial Co., Ltd.			

6.1.4. Check Point

Confirm the following parts if NG was displayed.

DISPLAY	Ref. No.	Description	P.C.B.
PEAKS	IC8001	Peaks Lite2p	A-Board
TUN1	TU8300	TUNER (PLL block)	A-Board
TUN2	TU8300	TUNER (MTS block)	A-Board
FE	IC8300	FRONT END PROCESSOR	A-Board
AVSW	IC3001	AUDIO/VIDEO SW	A-Board
ADV	IC4510	A/D CONV. , HDMI RX	A-Board
ADAV	IC2106	SOUND PROCESSOR	A-Board
GenX	IC1100	GenX5 (STB MCU)	A-Board
MEM1	IC1101	EEPROM (GenX5)	A-Board
MEM2	IC8503	EEPROM (Peaks)	A-Board
TEMP	IC9002	TEMP SENSOR	A-Board
PANEL	IC9003	PANEL MICON	A-Board











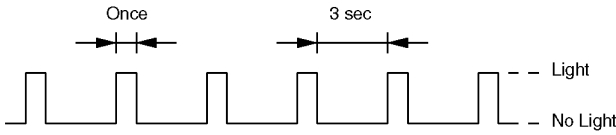


6.2. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.


Blinking Times	Blinking timing	Contents	Check point
1		No particular check point	-
		Panel Status	-
		STB 5V SENSE Time out	A-Board
2		15V SOS	D-Board
3		3.3V SOS	A-Board
4		Power SOS	P-Board
5		5V SOS	D-Board
6		Driver SOS1 (SC Energy recovery circuit)	SU-Board SD-Board SC-Board
7		Driver SOS2 (SC floating voltage area)	SU-Board SD-Board SC-Board
8		Driver SOS3 (SS Energy recovery circuit)	SS-Board
9		Panel Config SOS	-
10		Sub 5V SOS Main 3.3V SOS DTV 9V SOS Tuner Power SOS	A-Board
11		Fan SOS	PB-Board
12		Sound SOS	A-Board
13		Communication Error with IC8001 (Pesks Lite 2)	A-Board

6.3. No Power


First check point

There are following 2 states of No Power indication by power LED.


1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 6.2.)

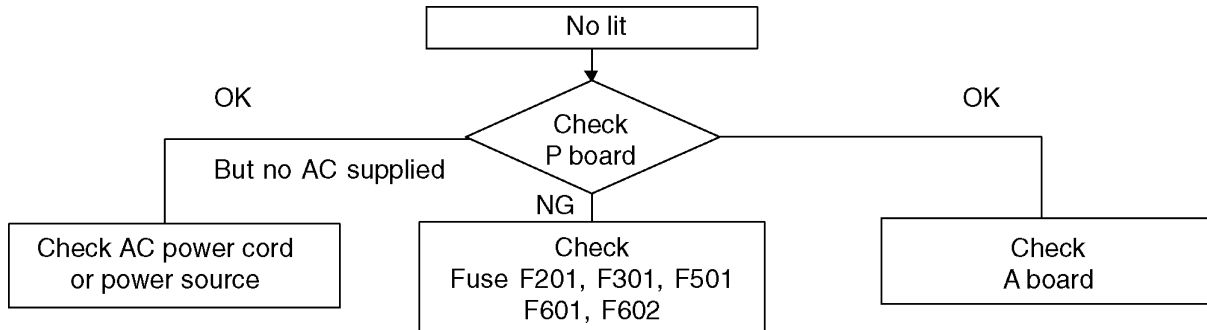

6.4. No Picture

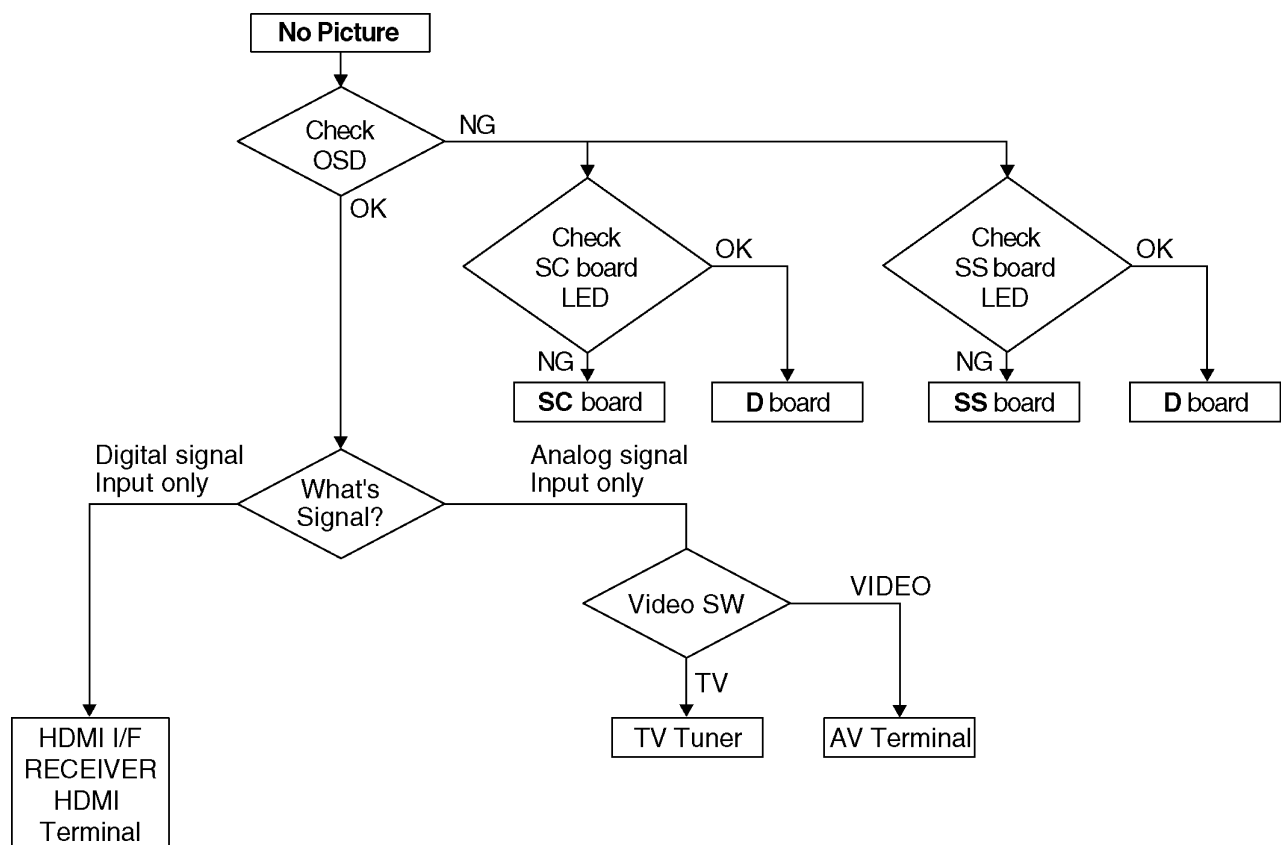

Drive circuits LED indicator

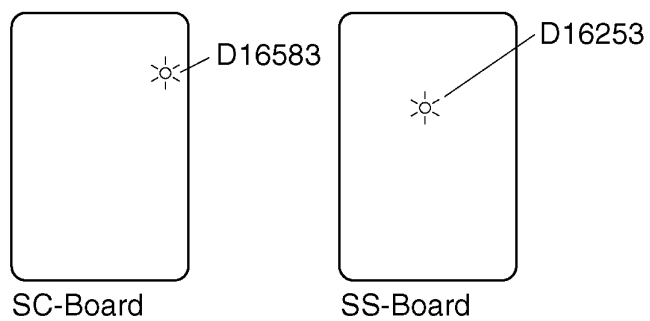

6.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

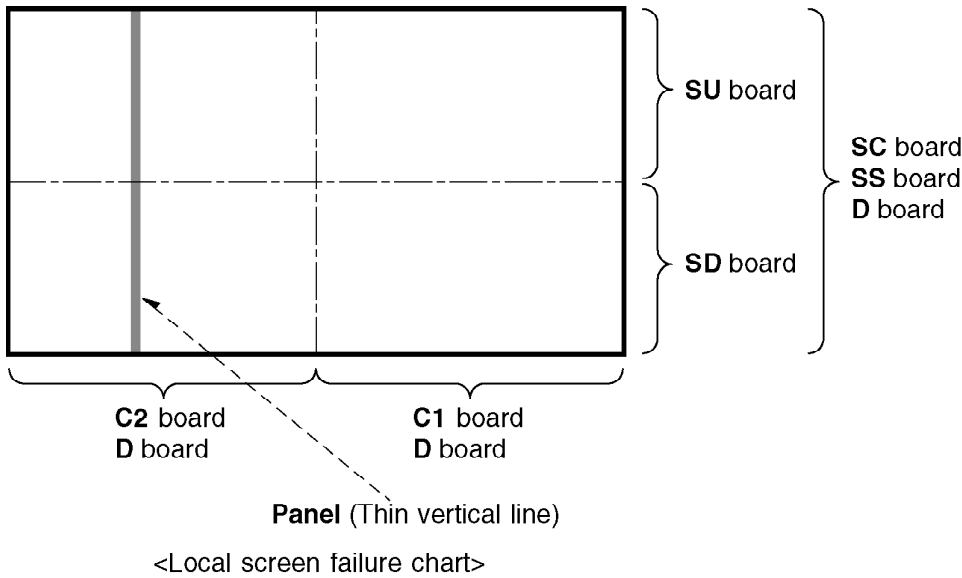


Fig-1


7 Disassembly and Assembly Instructions

7.1. Remove the Rear cover


1. See Service Hint (Section 3)

7.2. Remove the Fan unit

1. Unlock the cable clampers to free the cable.
2. Remove the screws (×3 ➡).
3. Remove the relay connectors and remove the Fan unit.

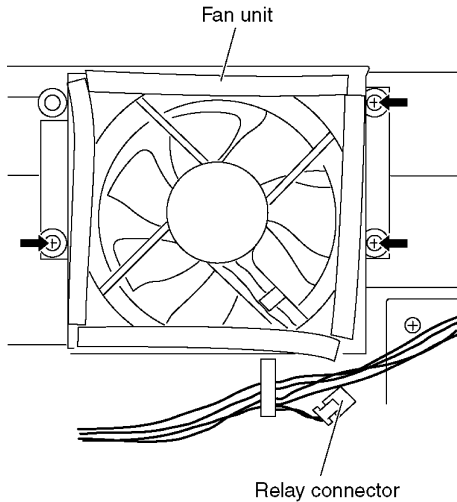

4. Remove the screw (×1 ➡) on the back side.
5. Remove the Fan.

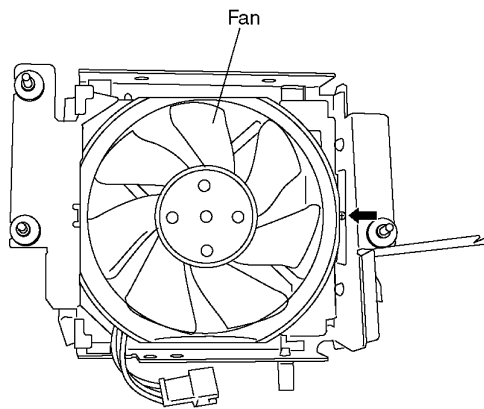


Fan unit back side

7.3. Remove the PB-Board

1. Unlock the cable clampers to free the cable.
2. Remove the screws (×2 ➡).
3. Remove a short-jumper connectors (PB31 and PB32) and re-use for new PB-Board.
4. Disconnect the connectors (PB30, PB33, PB34, PB35, PB36 and PB37)

5. Remove the PB-Board.

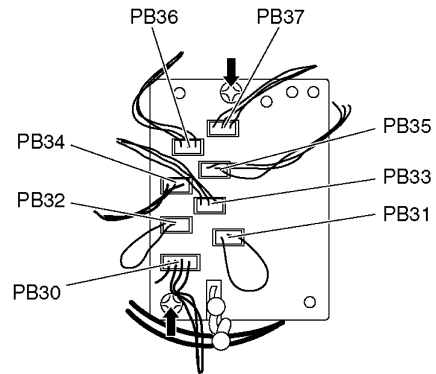


7.4. Remove the P-Board


Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.


1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (P2, P6, P7, P9, P11, P12 and P25).
3. Remove the screws (×6 ➡) and remove the P-Board unit.

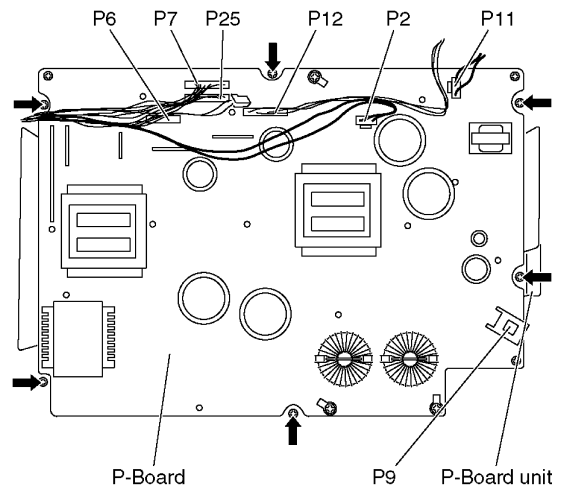

4. Remove the molding props (×2 ➡).
5. Remove the barrier (P).

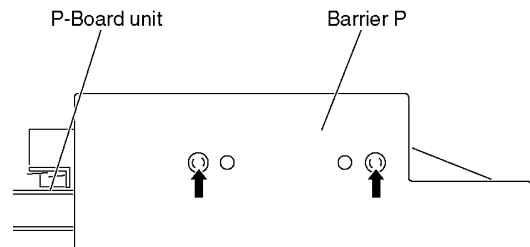

6. Remove the screws (×20 ➡) on the back side.

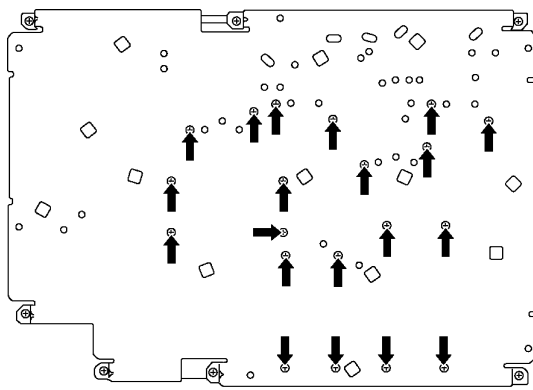


P-Board unit back side

7. Remove the screws (×7 ➡).

8. Remove the molding props (×13 ⇨).


9. Remove the P-Board.

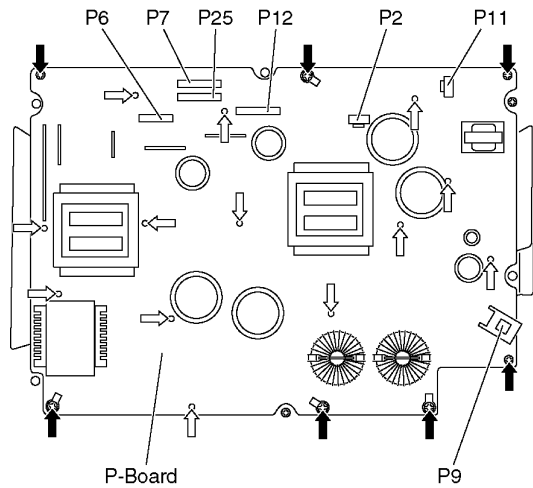

P-Board

Note:

When assembling the P-Board, the position of each hole of the insulation sheets (A and B) is set to the position of each hole of the P-Board, then assemble them. (➡ marks indicate setting positions.)

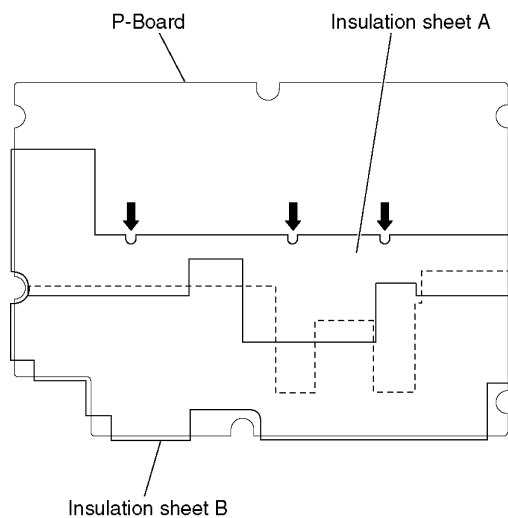


Insulation sheet B

7.5. Remove the Rear Terminal cover

1. Remove the screws (×4 ➡, ×2 ⇨).

2. Remove the Rear Terminal cover.

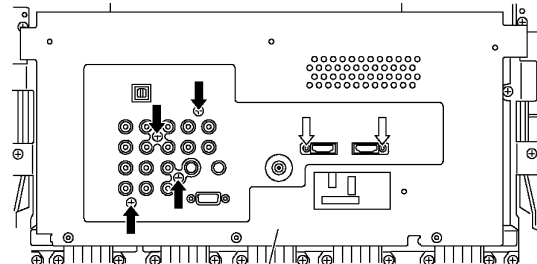


Rear Terminal cover

7.6. Remove the A-Board unit

1. Unlock the cable clampers to free the cable.

2. Disconnect the connectors (A1, A3, A5, A6, A7, A11, A12, A30, A51 and A52).

3. Remove the screws (×4 ➡) and remove the A-Board unit.

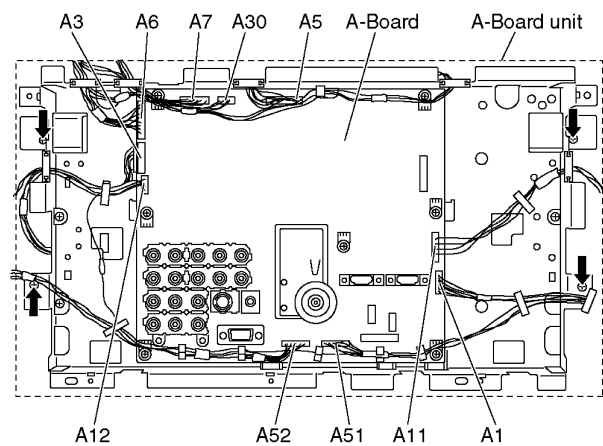

A12

A52

A51


A11

A1

7.7. Remove the A-Board

1. Remove the A-Board unit. (See section 7.6.)

2. Remove the screws (×8 ➡) and remove the A-Board.

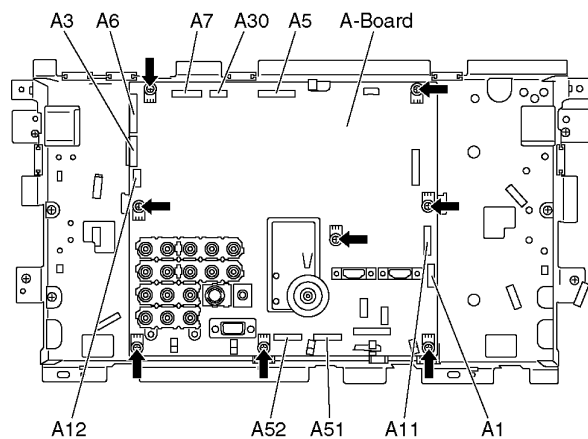

A12

A52


A51

A11

A1


7.8. Remove the SU-Board

1. Remove the flexible cables (SU1, SU2, SU3 and SU4) connected to the SU-Board.
2. Remove the flexible cable (SU11-SD11) and the bridge connector (SC41-SU41).
3. Remove the screws (×4 ➡) and remove the SU-Board.

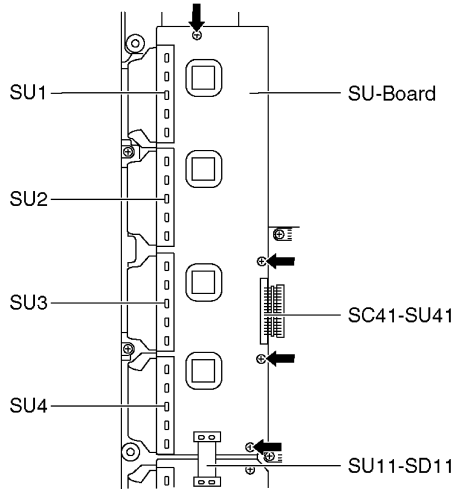


7.9. Remove the SD-Board

1. Remove the flexible cables (SD1, SD2, SD3 and SD4) connected to the SD-Board.
2. Remove the flexible cable (SU11-SD11) and the bridge connectors (SC42-SD42 and SC46-SD46).
3. Remove the screws (×4 ➡) and remove the SD-Board.

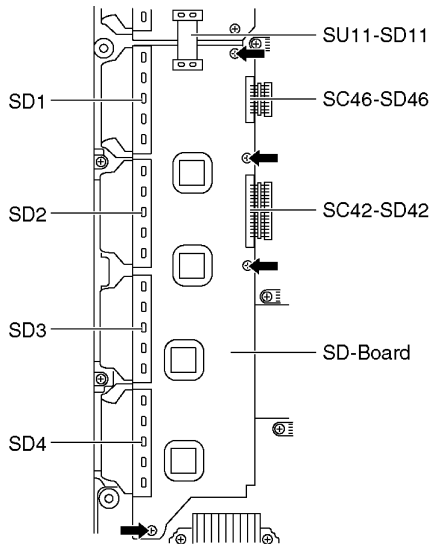


7.10. Remove the SC-Board

1. Remove the SU-Board and SD-Board. (See section 7.8. and 7.9.)
2. Unlock the cable claspers to free the cable.
3. Disconnect the connector (SC2).
4. Disconnect the flexible cable (SC20).
5. Remove the screws (×8 ➡) and remove the SC-Board.

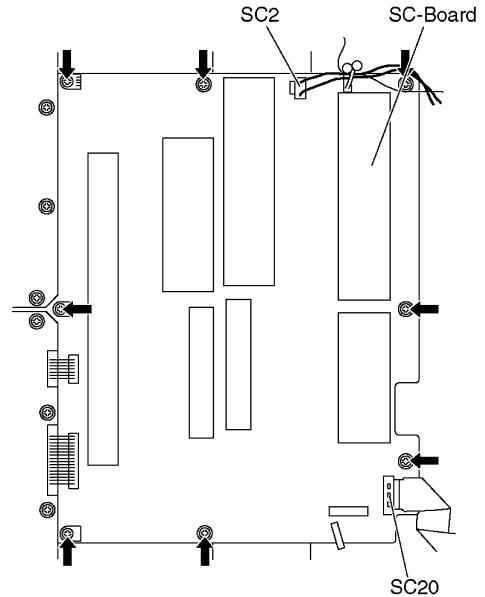


7.11. Remove the SS-Board

1. Unlock the cable claspers to free the cable.
2. Disconnect the connectors (SS11, SS12, SS33 and SS35).
3. Remove a short-jumper connector SS34 and re-use for new SS-Board.
4. Disconnect the flexible cables (SS61, SS63, SS64 and SS66).
5. Remove the screws (×6 ➡) and remove the SS-Board.

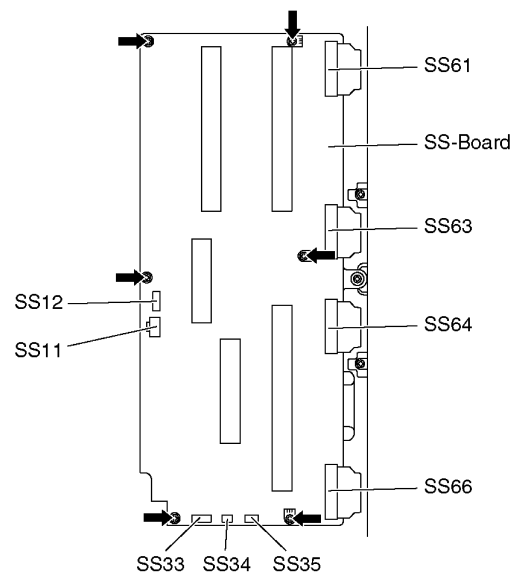


7.12. Remove the Stand brackets

1. Remove the Plasma panel section from the servicing stand and lay on a flat surface such as a table (covered) with the Plasma panel surface facing downward.
2. Remove the Stand brackets (L, R) fastening screws (×4 each) and remove the Stand brackets (L, R).

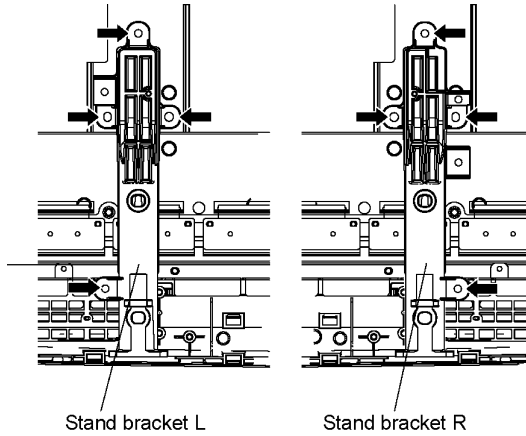


7.13. Remove the D-Board

1. Remove the A-Board unit. (See section 7.6.)
2. Disconnect the connectors (D3, D5 and D25).
3. Disconnect the flexible cables (D20, D31, D32 and D33).
4. Remove the screws (×4 ➡) and remove the D-Board.

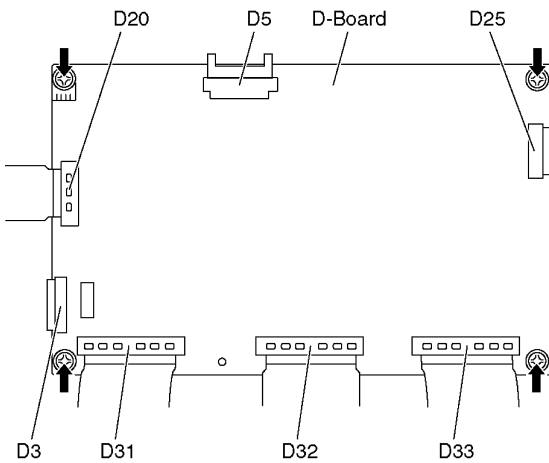


7.14. Remove the C1-Board


1. Remove the A-Board unit. (See section 7.6.)
2. Remove the Stand bracket L. (See section 7.12.)
3. Remove the screws (×3 ➡) and Remove the Cabinet mount metal.

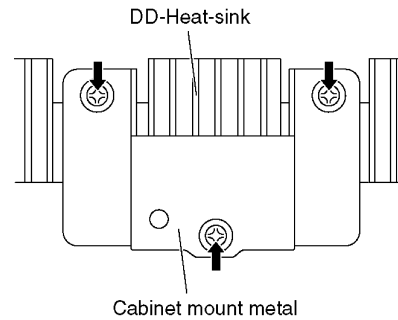

4. Remove the DD-Heat-sink holder fastening screws (×16 ⇨).
5. Remove the DD-Heat-sink (×8).

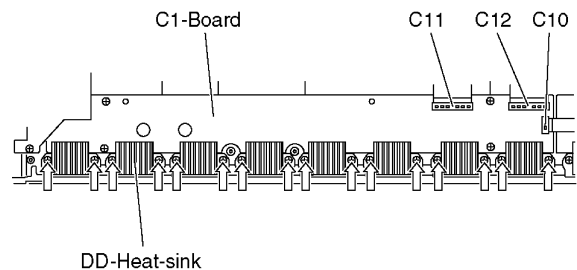


6. Disconnect the flexible cables (CB1, CB2, CB3, CB4, CB5, CB6, CB7 and CB8).
7. Disconnect the flexible cables (C10, C11 and C12).
8. Remove the screws (×5 ➡) and remove the C1-Board.

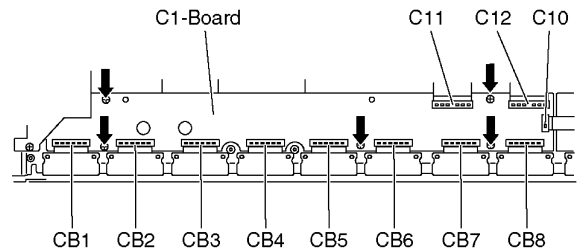


7.15. Remove the C2-Board


1. Remove the A-Board unit. (See section 7.6.)
2. Remove the stand bracket R. (See section 7.12.)
3. Remove the screws (×3 ➡) and Remove the Cabinet mount metal.

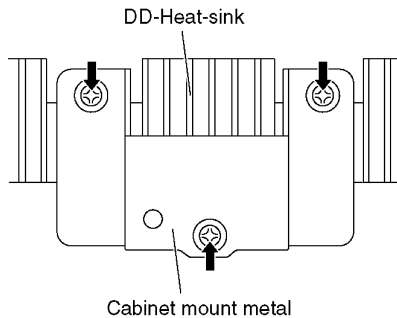

4. Remove the DD-Heat-sink holder fastening screws (×14 ⇨).
5. Remove the DD-Heat-sink (×7).

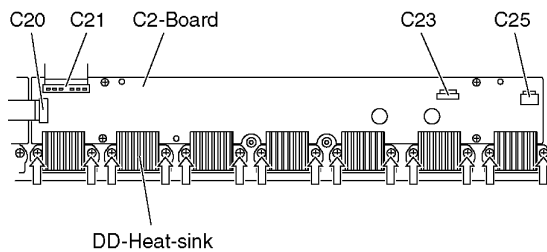


6. Disconnect the flexible cables (CB9, CB10, CB11, CB12, CB13, CB14 and CB15).
7. Disconnect the flexible cables (C20 and C21).
8. Disconnect the connectors (C23 and C25).
9. Remove the screws (×5 ➡) and remove the C2-Board.

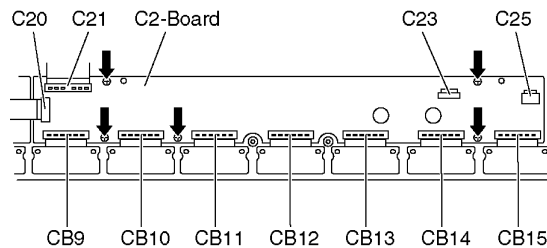


7.16. Remove the Front bracket

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (A11, A51 and A52). (See section 7.6.)
3. Remove the screws (×2 ➡, ×2 ⇨) and remove the Front bracket.

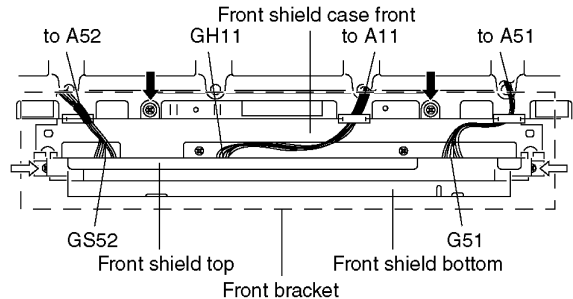


7.17. Remove the G-Board, GS-Board and GH-Board


1. Remove the Front bracket. (See section 7.16.)
2. Remove the screws (×2 ➡).

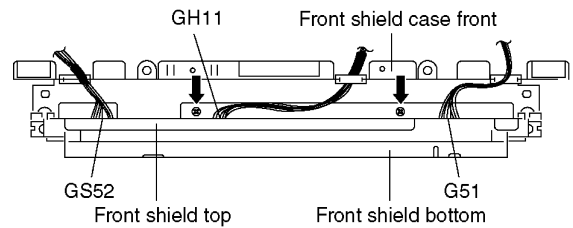

3. Remove the screws (×3 ➡).
4. Remove the Front shield case front.

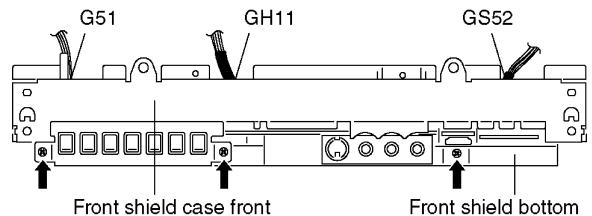


5. Disconnect the connectors (GH11 and GS52).
6. Remove the screws (×2 ➡).
7. Remove the Front shield top.

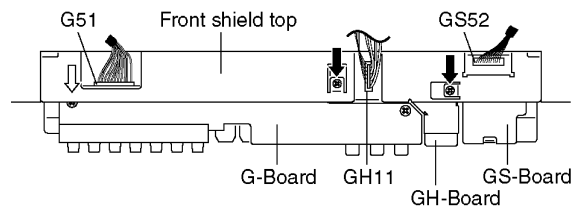


8. Remove the GH-Board.
9. Remove the screws (×2 ➡) and remove the GS-Board.
10. Remove the screws (×3 ⇨).

11. Disconnect the connector (G51) and remove the G-Board.

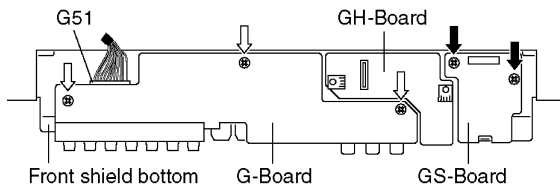


7.18. Remove the Speakers

1. Disconnect the relay connectors
2. Remove the screws (×4 ➡ each) and remove the Speaker (L, R).

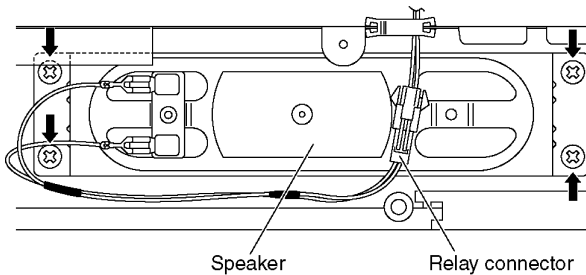


7.19. Remove the Plasma panel section from the Cabinet assy (glass)


1. Remove the stand brackets (left, right) fastening screw (×1 ➡ each).

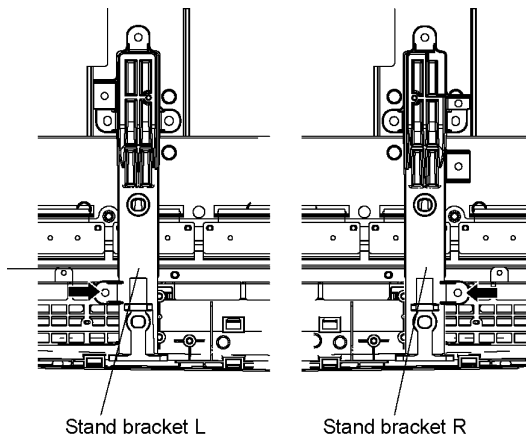


2. Remove the cabinet assy and the plasma panel fastening screws (×4 ➡, ×6 ⇨).

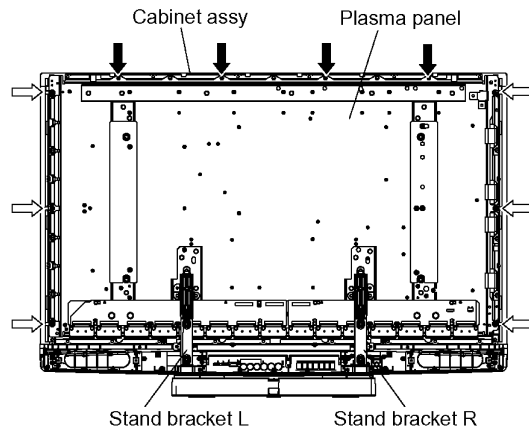


3. For leaving the plasma panel from the front frame, pull the bottom of the cabinet assy forward, lift, and remove.

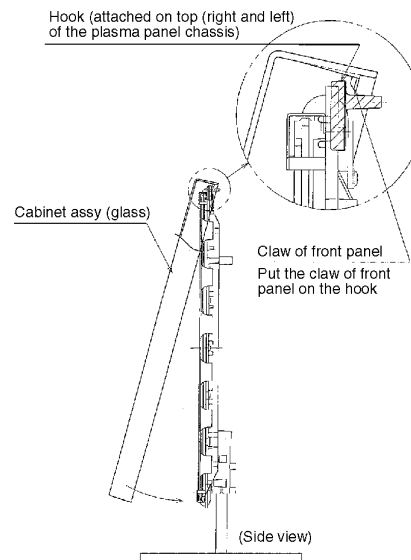


4. Remove the spacers and spacer rings (×6 ➡).

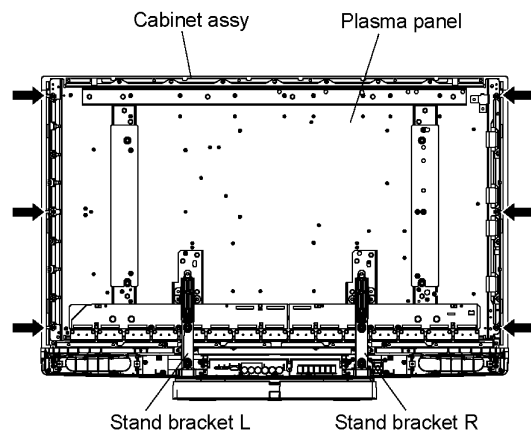

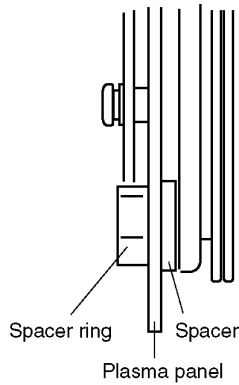


7.20. Remove the S-Board

1. Remove the Cabinet assy. (See section 7.19.)
2. Disconnect the connector (S2).
3. Remove the screws (×2 ➡) and remove the S-Board metal frame.




4. Remove the screws (×2 ➡) and remove the S-Board.



7.21. Remove the K-Board

1. Remove the Cabinet assy. (See section 7.19.)
2. Remove the S-Board. (See section 7.20.)
3. Remove the screws (×2 ➡).
4. Disconnect the connector (K1) and Remove the K-Board.



7.22. Remove the plasma panel (finished)

1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
2. Attach the C1-Board and the C2-Board, connect the flexible cables (×15) from the plasma panel to the C1-Board and the C2-Board, and fit the flexible cable holders.
3. Attach the Hooks (left, right) and fit the stand brackets (L, R) to the new plasma panel.
4. Place the plasma panel section on the servicing stand.
5. Attach the cabinet assy and each P.C.Board and so on, to the new plasma panel.

***When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain between the front glass and plasma panel.**

8 Measurements and Adjustments

8.1. Adjustment Procedure

8.1.1. Driver Set-up

8.1.1.1. Item / Preparation

1. Input a white signal to plasma video input.
2. Set the picture controls as follows.
Picture menu: Vivid
Normal: Set
Aspect: Full

Caution

1. First perform Vsus adjustment.
2. Confirmation of Vscn voltage should be performed after confirmation of Vad adjustment.
When Vad= -140V, Voltage of Vscn is 8V \pm 1V.

8.1.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

Check or adjust the following voltages with the multimeter.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus \pm 2V	VR251 (P)	*
Ve	TPVE (SS)	Ve \pm 1V	VR16000 (SS)	*
Vset	TPVSET (SC)	330V \pm 7V	Fixed	
Vad	TPVAD (SC)	-140V \pm 1V	VR16600 (SC)	
Vscn	TPVSCN (SC)	Vad+148V \pm 1V	Fixed	
Vda	TPVDA (SS)	75V + 1V, -2V	Fixed	

*See the Panel label.


Panel Label information

The diagram shows a rectangular panel label with a double border. Inside, there is a small square logo with the letter 'M' in the top left corner. Below the logo are two empty rectangular boxes. Further down is the text 'Serial No.' followed by a dashed line and an empty box. Below that is 'Ve: [] v, Vsus: [] v', where the brackets are empty boxes. To the right of this line, an arrow points from a box labeled 'Adjustment voltage' to the 'Vsus' value box. At the bottom left is 'MADE IN JAPAN' and at the bottom right is 'TQF' followed by a dashed line and an empty box.

8.1.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.
Picture menu : Vivid
Normal : Set
Aspect : Full
3. Connect Oscilloscope to TPSC1 (SC).
Check the voltage (T2) at 100 us period on the down slop.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR16602 (SC)	250 V ± 10 V

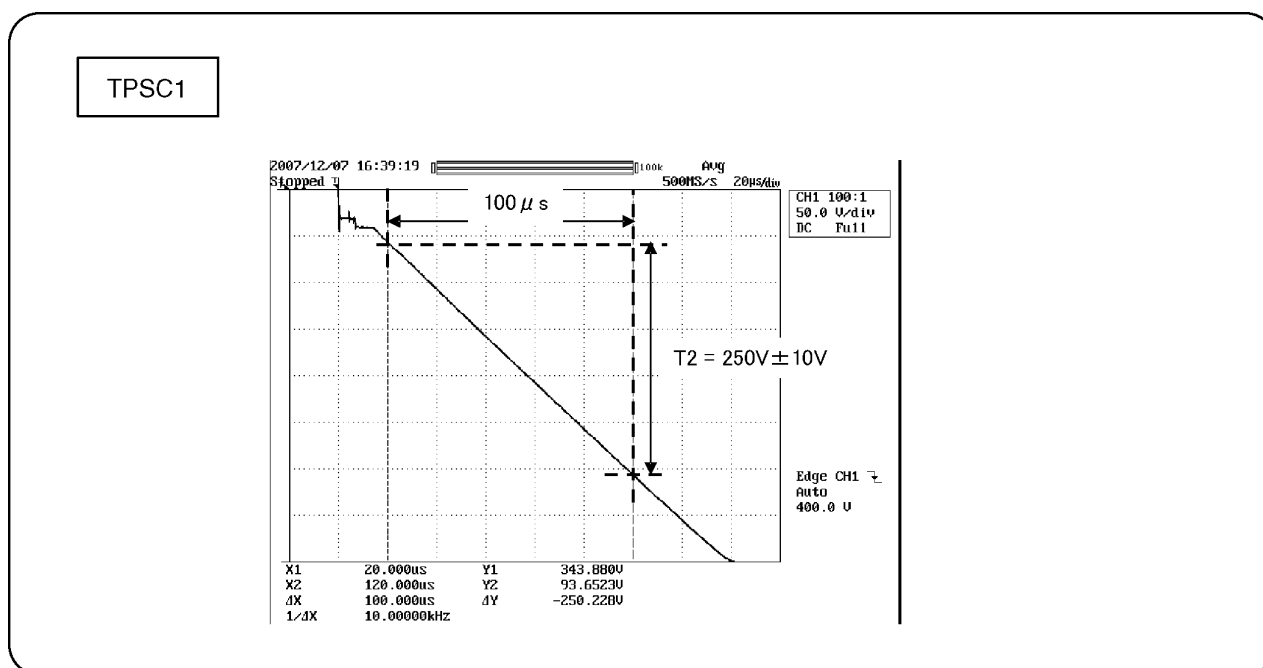

8.1.3. P.C.B. (Printed Circuit Board) exchange

8.1.3.1. Caution

1. To remove P.C.B. , wait 1 minute after power was off for discharge from electrolysis capacitors.

8.1.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	Vsus ± 2V	VR251 (P)	*
SC Board	Vad	TPVAD (SC)	-140V ± 1V	VR16600 (SC)	
SS Board	Ve	TPVE (SS)	Ve ± 1V	VR16000 (SS)	*
A, D Board	White balance and Sub brightness for NTSC, PAL, HD, PC and 625i signals				

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

8.1.4. Adjustment Volume Location

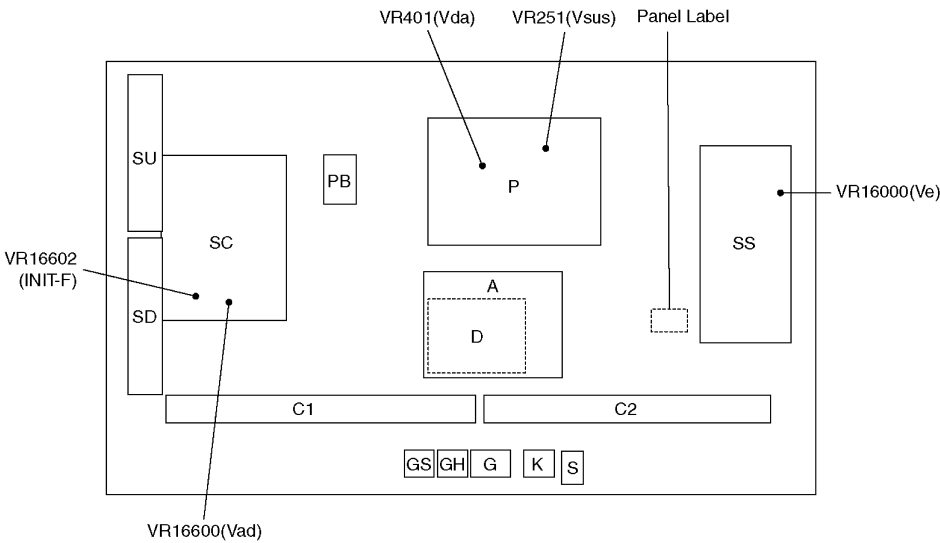

8.1.5. Test Point Location

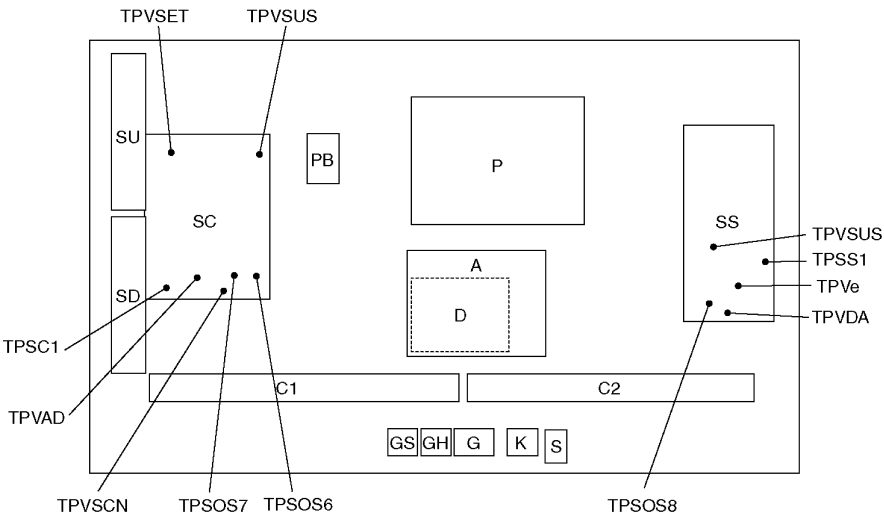

8.2. Adjustment

8.2.1. White balance adjustment

Name of measuring instrument	Connection	Remarks								
<ul style="list-style-type: none">W/B patternColor analyzer (Minolta CA-100 or equivalent)	Component input Panel surface									
Procedure		Remarks								
<ul style="list-style-type: none">Ensure aging is adequate.Make sure the front panel to be used on the final set is fitted.Make sure a color signal is not being shown before adjustment.Put the color analyzer where there is little color variation. <ol style="list-style-type: none">Output a white balance pattern.Check that the color temperature is [Cool].Set to serviceman mode, WB-ADJ.Set [R-CUT] [G-CUT] [B-CUT] the values written in table 1.Attach the sensor of color analyzer to the center of highlight window.Fix G drive at C0h and adjust [B-DRV] and [R-DRV] so x, y value of color analyzer become the [Color temperature High] in table 2.Increase RGB together so the maximum drive value in RGB becomes FC. That is, set [ALL DRIVE] to FC. Execute adjustment again. When that, the maximum value of R/G/B DRV should be FC, and either R/G/B DRV should be FC.Set color temperature to [Normal].Set [R-CUT] [G-CUT] [B-CUT] the values written in table 1.Attach the sensor of color analyzer to the center of highlight window.Fix G drive at C0h and adjust [B-DRV] and [R-DRV] so x, y value of color analyzer become the [Color temperature Mid] in table 2.Increase RGB together so the maximum drive value in RGB becomes FC. That is, set [ALL DRIVE] to FC. Execute adjustment again. When that, the maximum value of R/G/B DRV should be FC, and either R/G/B DRV should be FC.Set color temperature to [Warm].Set [R-CUT] [G-CUT] [B-CUT] the values written in table 1.Attach the sensor of color analyzer to the center of highlight window.Fix G drive at C0h and adjust [B-DRV] and [R-DRV] so x, y value of color analyzer become the [Color temperature Low] in table 2.Increase RGB together so the maximum drive value in RGB becomes FC. That is, set [ALL DRIVE] to FC. Execute adjustment again. When that, the maximum value of R/G/B DRV should be FC, and either R/G/B DRV should be FC.Set color temperature to [Cool]. <p>- adjustment of [Normal] [Warm] by data shift from [Cool] adjust. - For [Normal] [Warm] adjustment, set values that the adjusted value of [Cool] plus the figures wrote below.</p> <table><tr><td>Normal :</td><td>R-DRV : -2h</td><td>G-DRV : 0h</td><td>B-DRV : -17h</td></tr><tr><td>Warm :</td><td>R-DRV : 3h</td><td>G-DRV : 0h</td><td>B-DRV : -46h</td></tr></table>		Normal :	R-DRV : -2h	G-DRV : 0h	B-DRV : -17h	Warm :	R-DRV : 3h	G-DRV : 0h	B-DRV : -46h	
Normal :	R-DRV : -2h	G-DRV : 0h	B-DRV : -17h							
Warm :	R-DRV : 3h	G-DRV : 0h	B-DRV : -46h							
19. Copy values adjusted by HD pattern to the NTSC data area of EEPROM.										

Table 1: R-CUT,G-CUT,B-CUT setting data

Color temperature	R-CUT	G-CUT	B-CUT
High(Cool)	80	80	80
Mid	80	80	80
Low(Warm)	80	80	80

Table 2: W/B adjustment values

Color temperature	x	y
High(Cool)	0.276	0.276
Mid	0.288	0.296
Low(Warm)	0.313	0.329

Table 3: EEPROM data addresses


SD/ Color temperature High	R-CUTOFF	022C
	G-CUTOFF	022D
	B-CUTOFF	022E
	R-DRIVE	032F
	G-DRIVE	0230
	B-DRIVE	0231
SD/ Color temperature Mid	R-CUTOFF	0232
	G-CUTOFF	0233
	B-CUTOFF	0234
	R-DRIVE	0235
	G-DRIVE	0236
	B-DRIVE	0237
SD/ Color temperature Low	R-CUTOFF	0238
	G-CUTOFF	0239
	B-CUTOFF	023A
	R-DRIVE	023B
	G-DRIVE	023C
	B-DRIVE	023D
HD/ Color temperature High	R-CUTOFF	023E
	G-CUTOFF	023F
	B-CUTOFF	0240
	R-DRIVE	0241
	G-DRIVE	0242
	B-DRIVE	0243
HD/ Color temperature Mid	R-CUTOFF	0244
	G-CUTOFF	0245
	B-CUTOFF	0246
	R-DRIVE	0247
	G-DRIVE	0248
	B-DRIVE	0249
HD/ Color temperature Low	R-CUTOFF	024A
	G-CUTOFF	024B
	B-CUTOFF	024C
	R-DRIVE	024D
	G-DRIVE	024E
	B-DRIVE	024F

9 Block Diagram


9.1. Block Diagram (1/6)



9.2. Block Diagram (2/6)

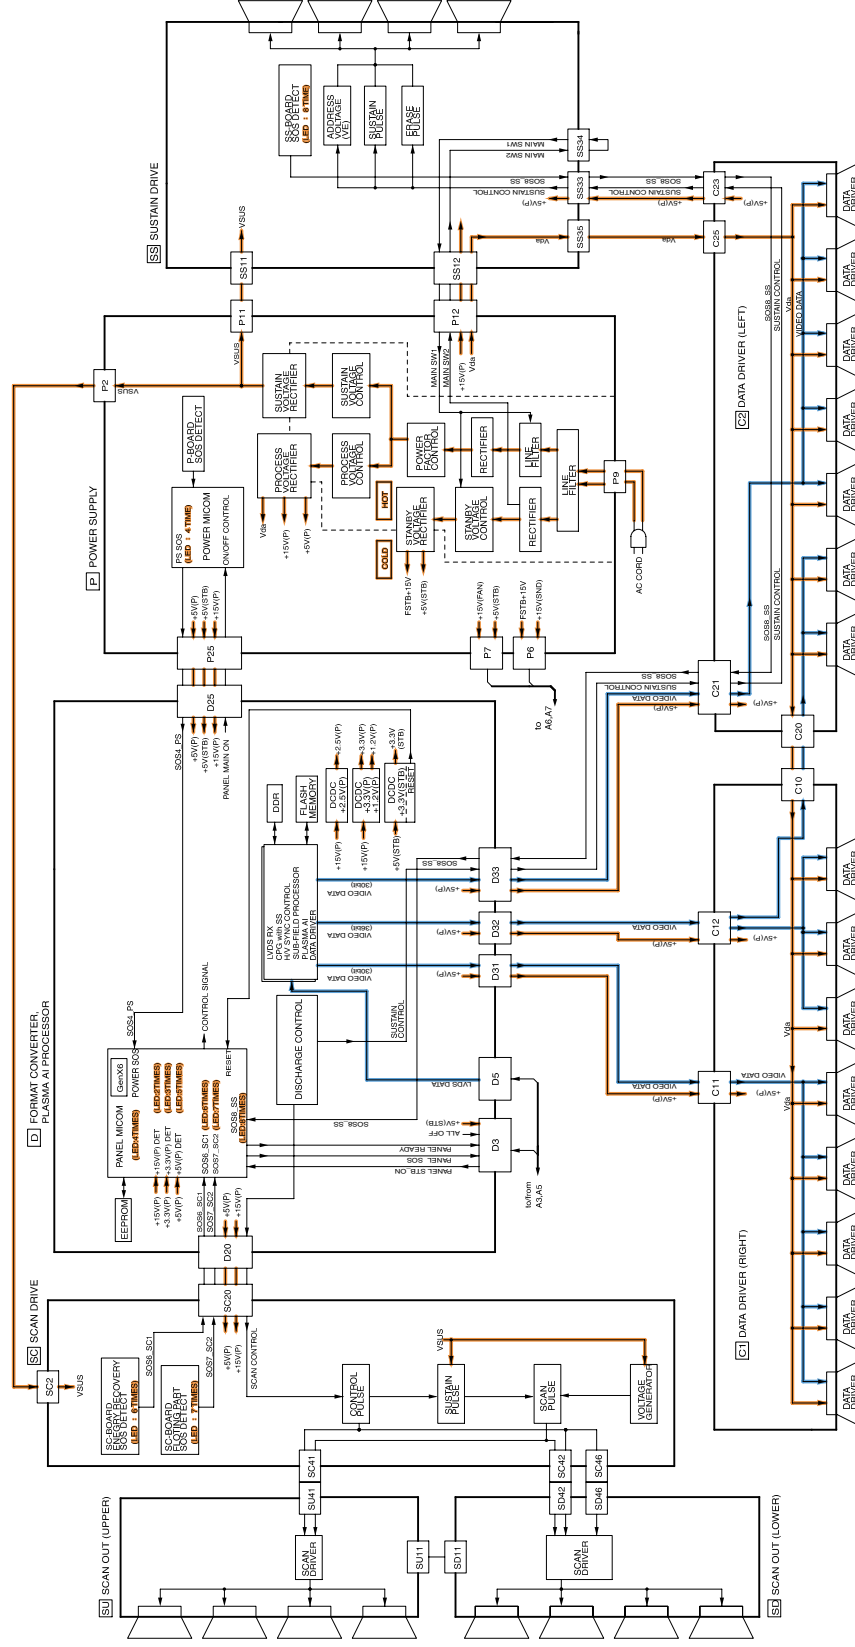TH-42PZ80U
Block (2/6) DiagramTH-42PZ80U
Block (2/6) Diagram


9.3. Block Diagram (3/6)

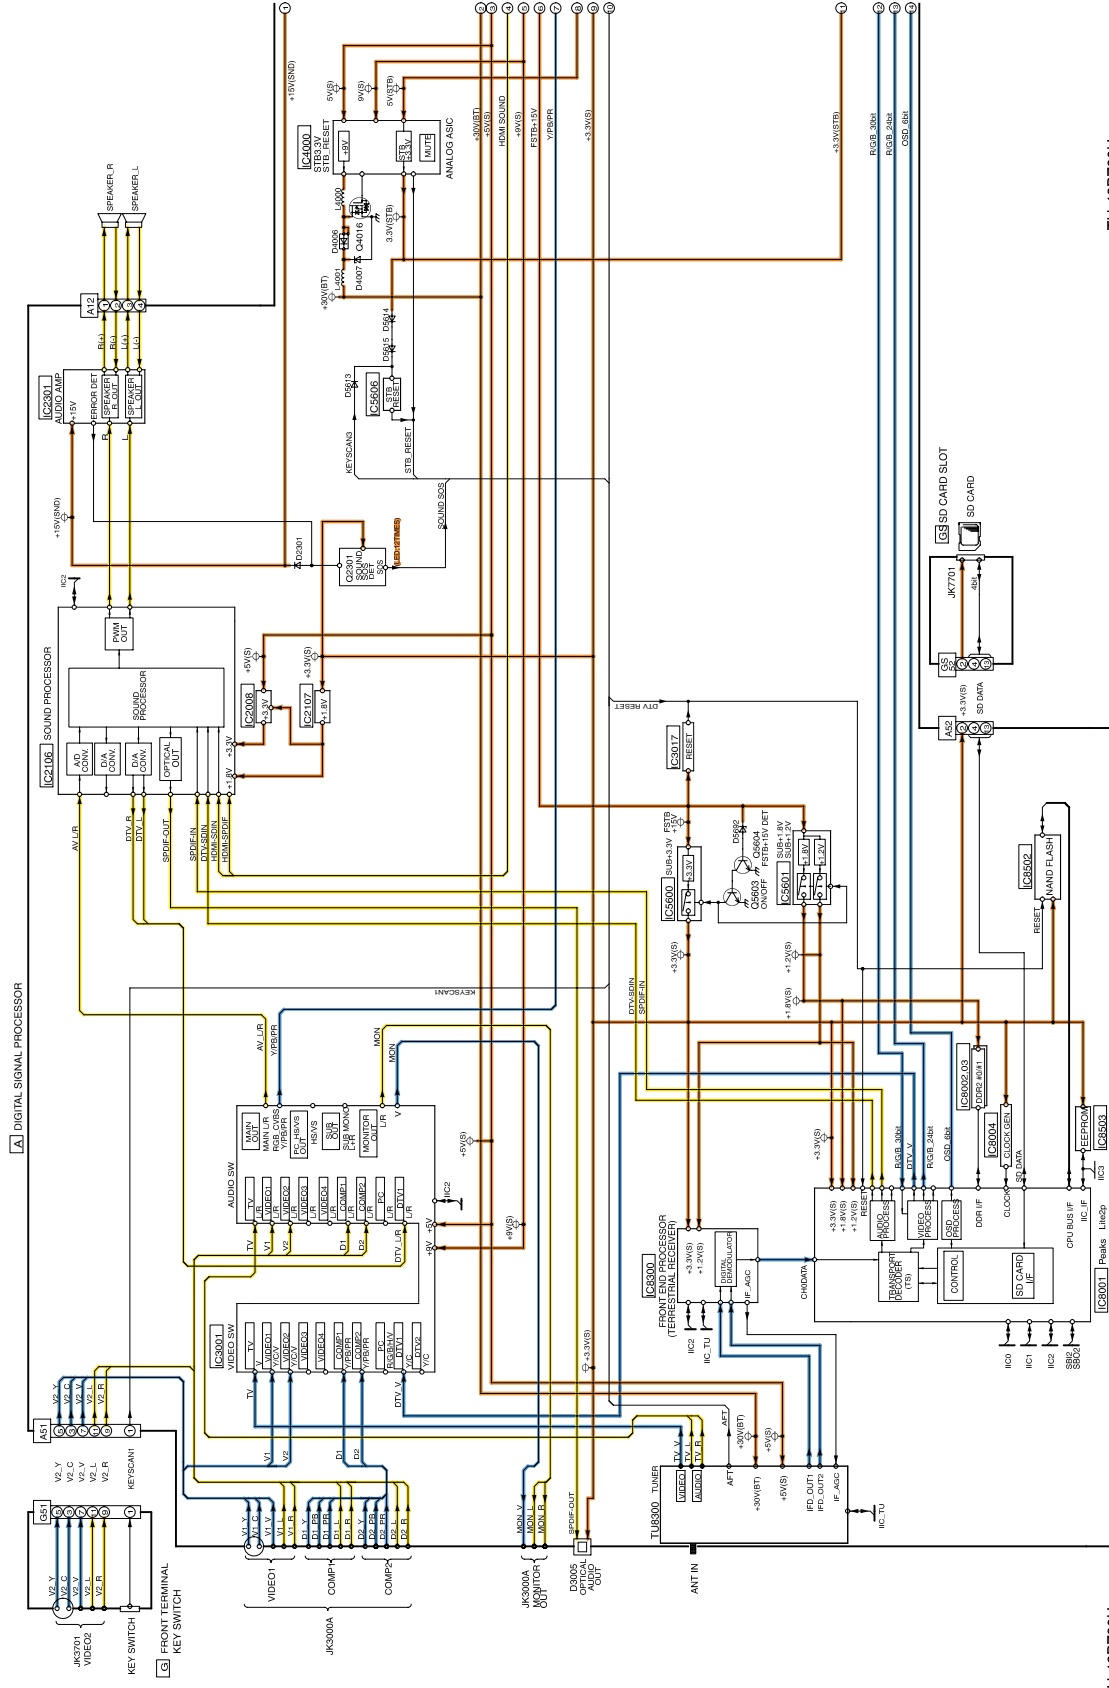


TH-42PZ80U
Block (3/6) Diagram

TH-42PZ80U
Block (3/6) Diagram

9.4. Block Diagram (4/6)


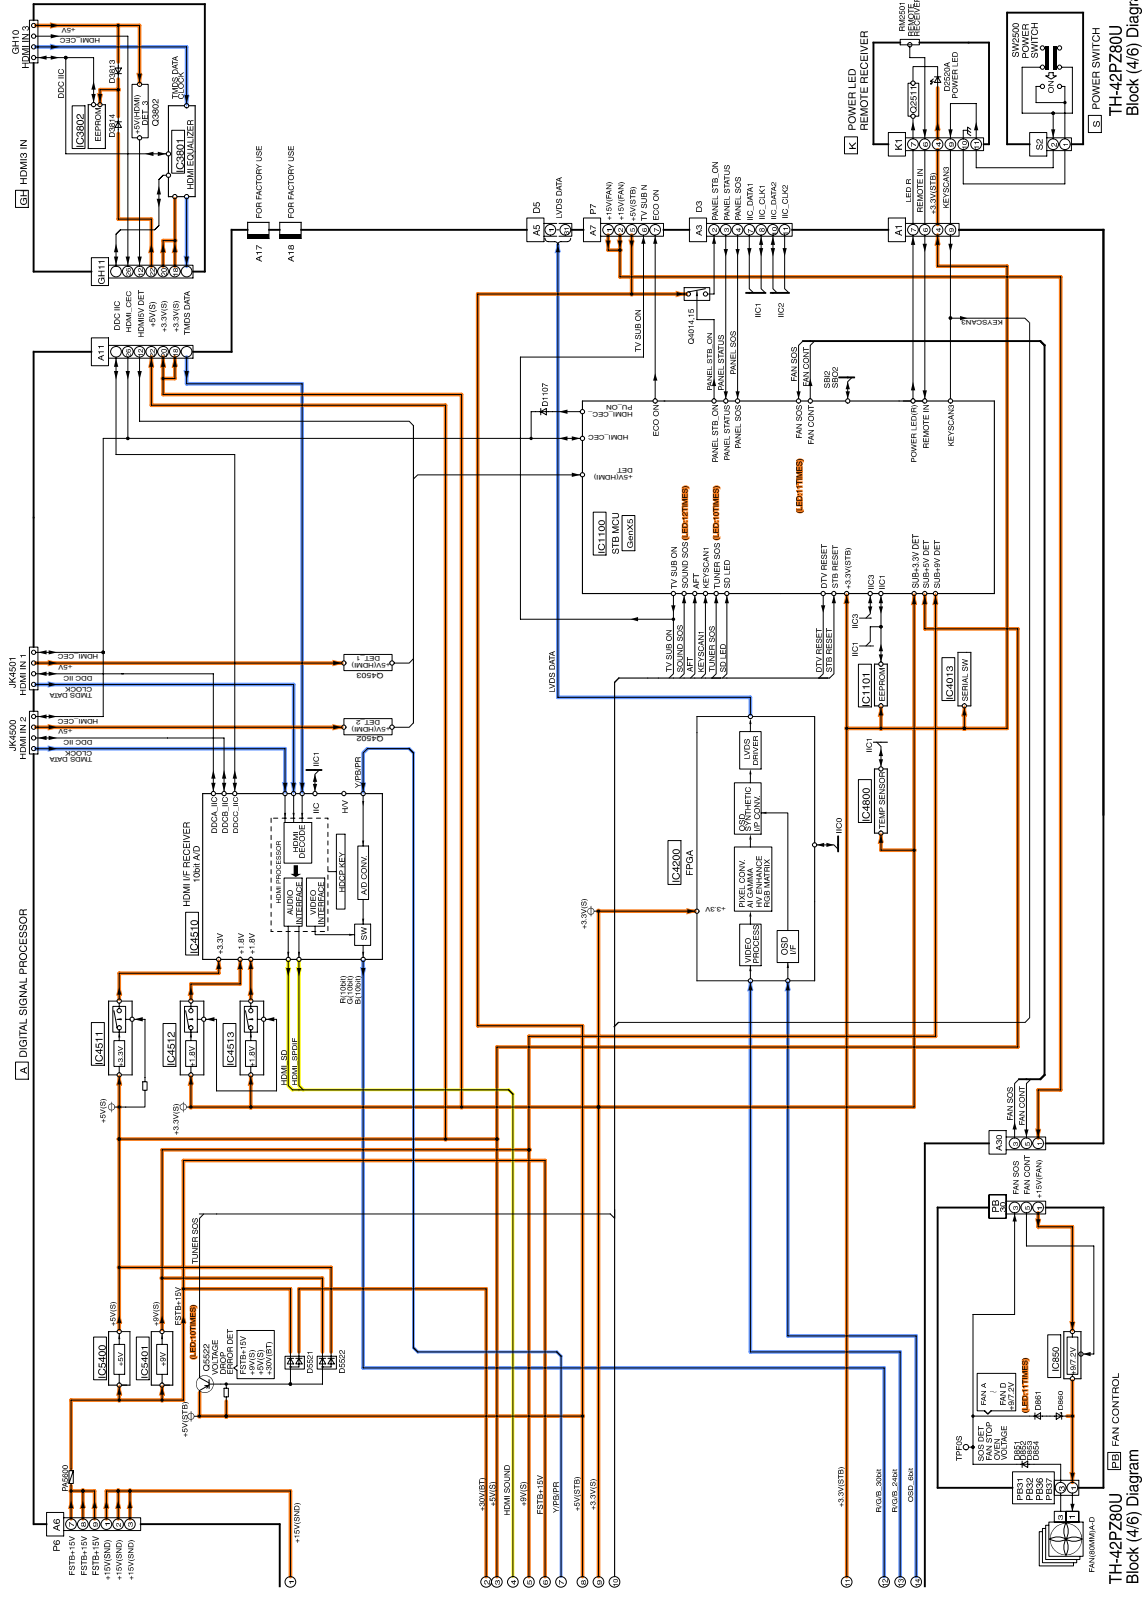


9.5. Block Diagram (5/6)

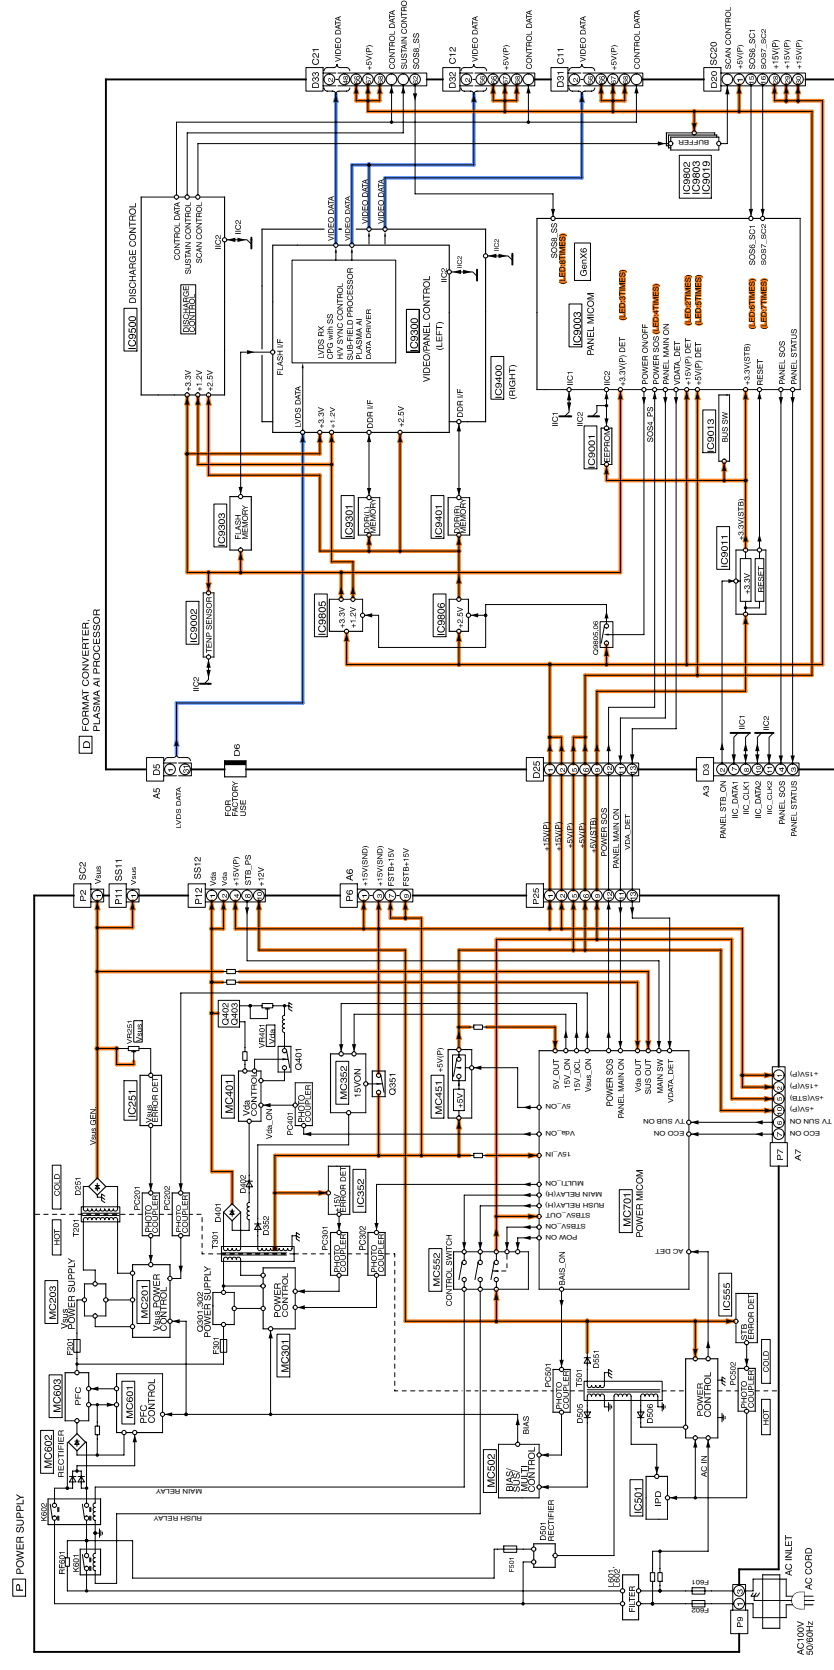TH-42PZ80U
Block (5/6) Diagram

TH-42PZ80U
Block (5/6) Diagram

9.6. Block Diagram (6/6)

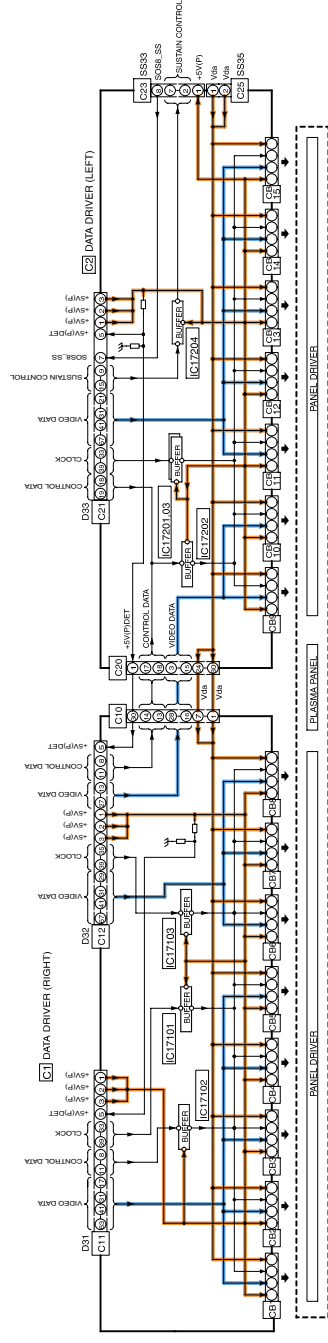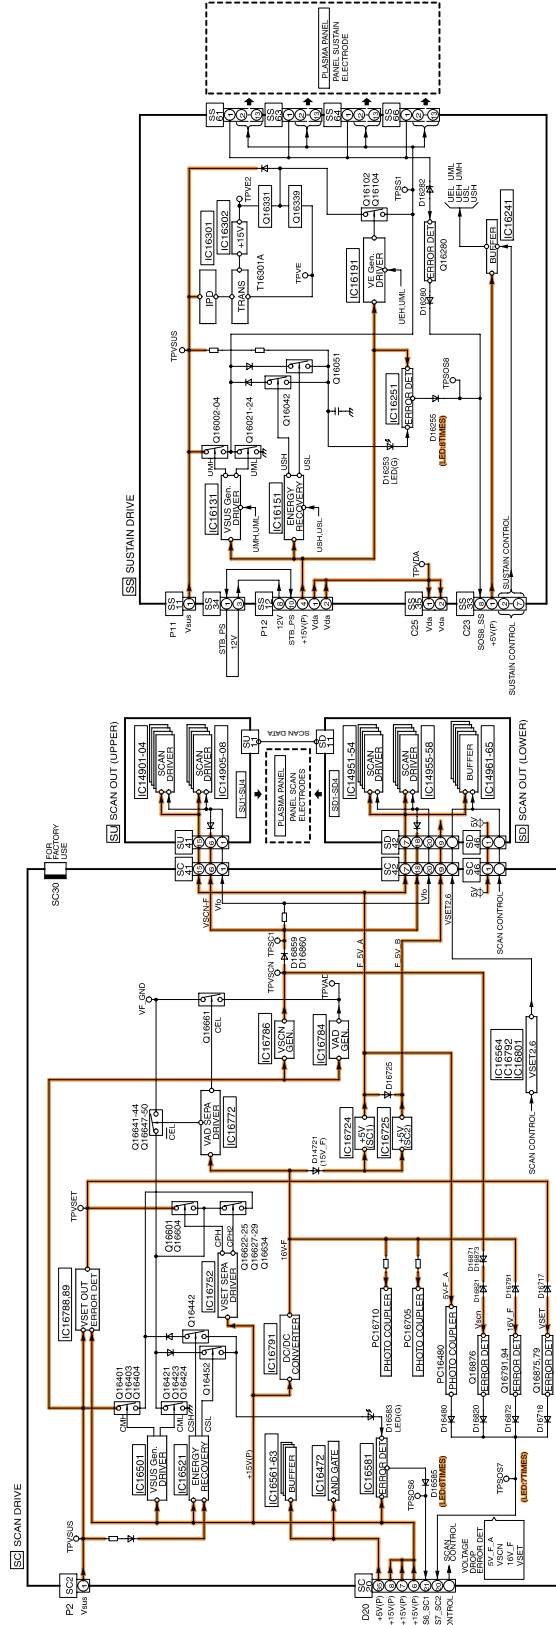

TH-42PZ80U
Block (6/6) Diagram


TH-42PZ80U
Block (6/6) Diagram

10 Wiring Connection Diagram


10.1. Caution statement.

Caution:
Please confirm that all flexible cables are assembled correctly.
Also make sure that they are locked in the connectors.
Verify by giving the flexible cables a very slight pull.


10.2. Wiring (1)

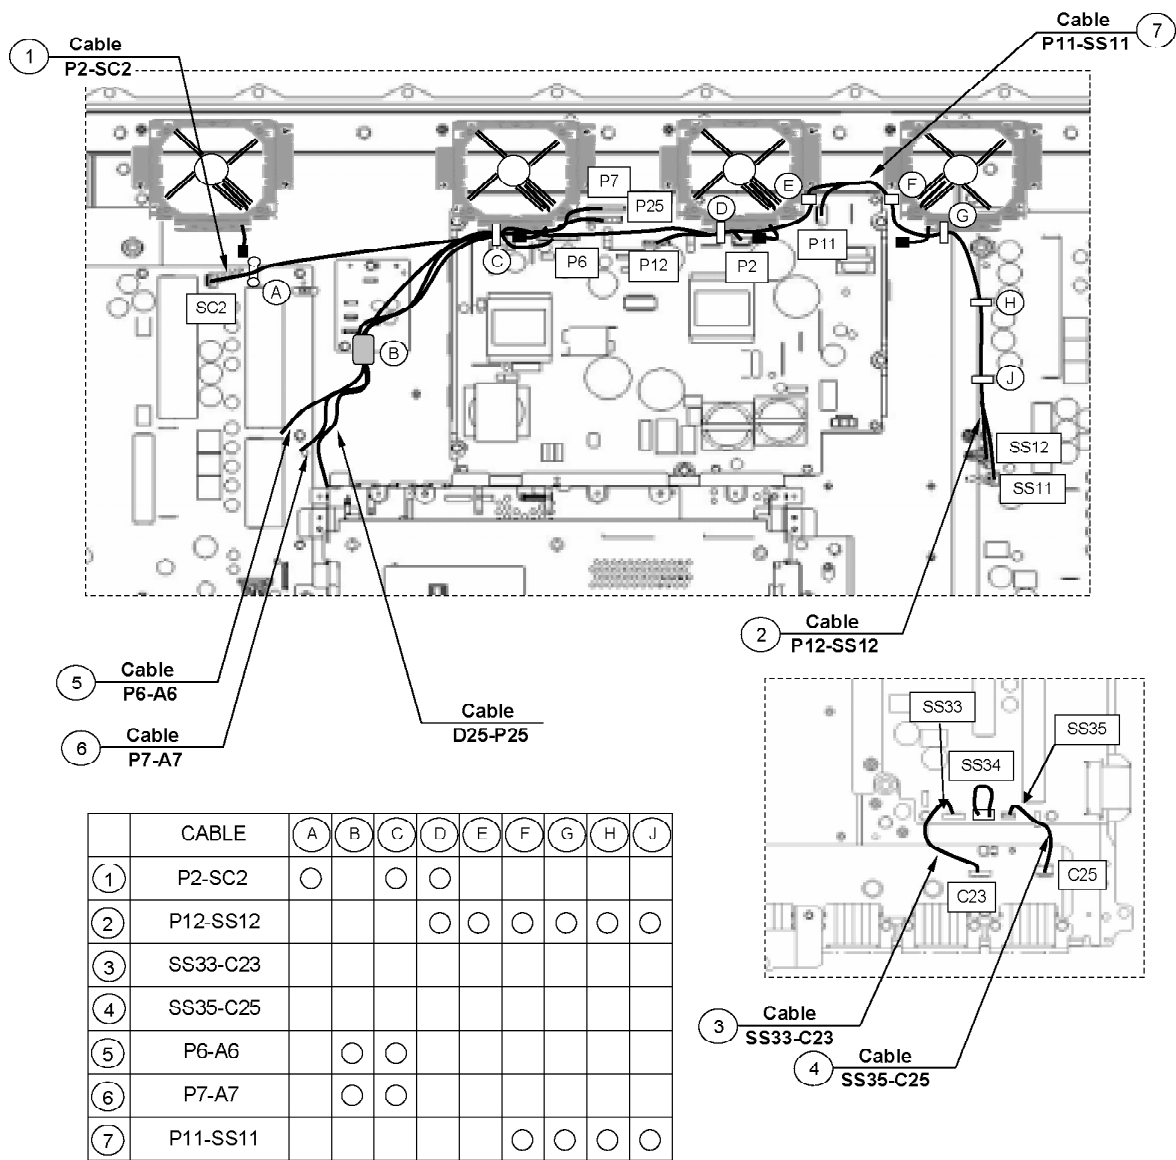


10.3. Wiring (2)

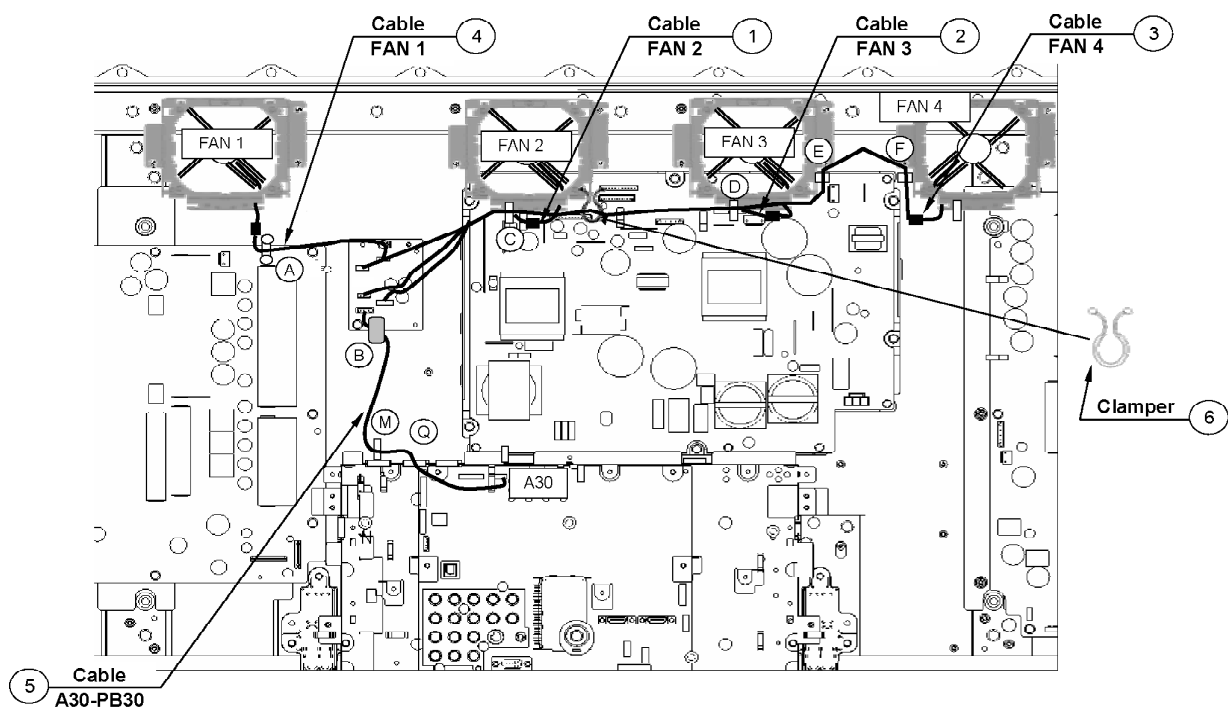

	CABLE	A	B	C	D	E	M	Q	F
①	FAN2-PB31			○					
②	FAN3-PB32			○	○				
③	FAN4-PB36			○	○	○			○
④	FAN1-PB37	○							
⑤	A30-PB30		○				○	○	

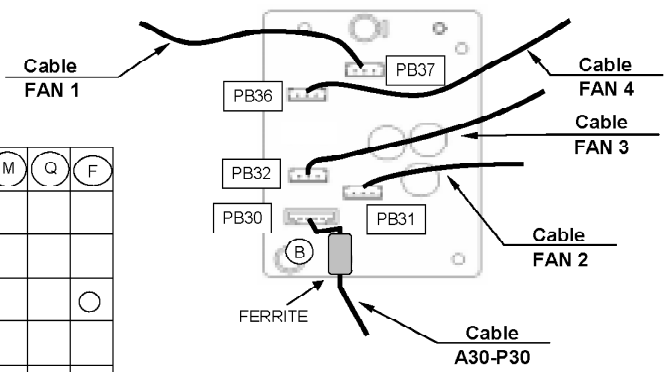


10.4. Wiring (3)

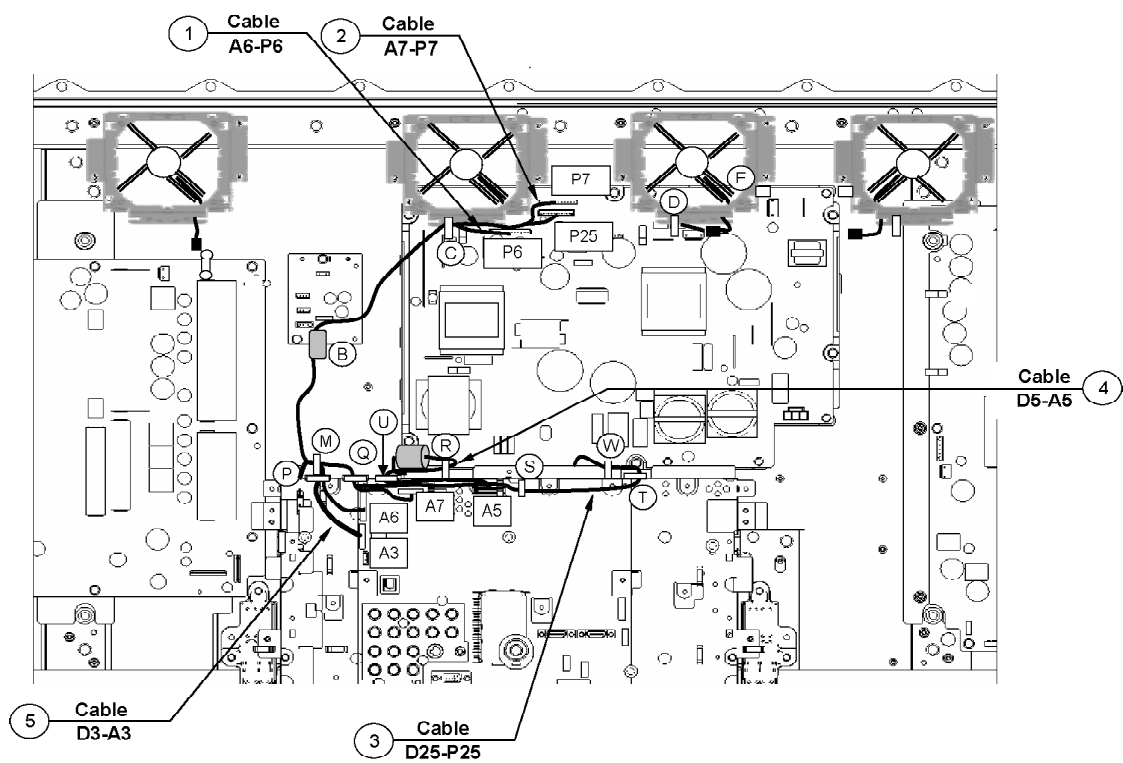



	CABLE	B	C	M	P	Q	R	S	T	U	W
1	A6-P6										
2	A7-P7										
3	D25-P25										
4	D5-A5										
5	D3-A3										

10.5. Wiring (4)

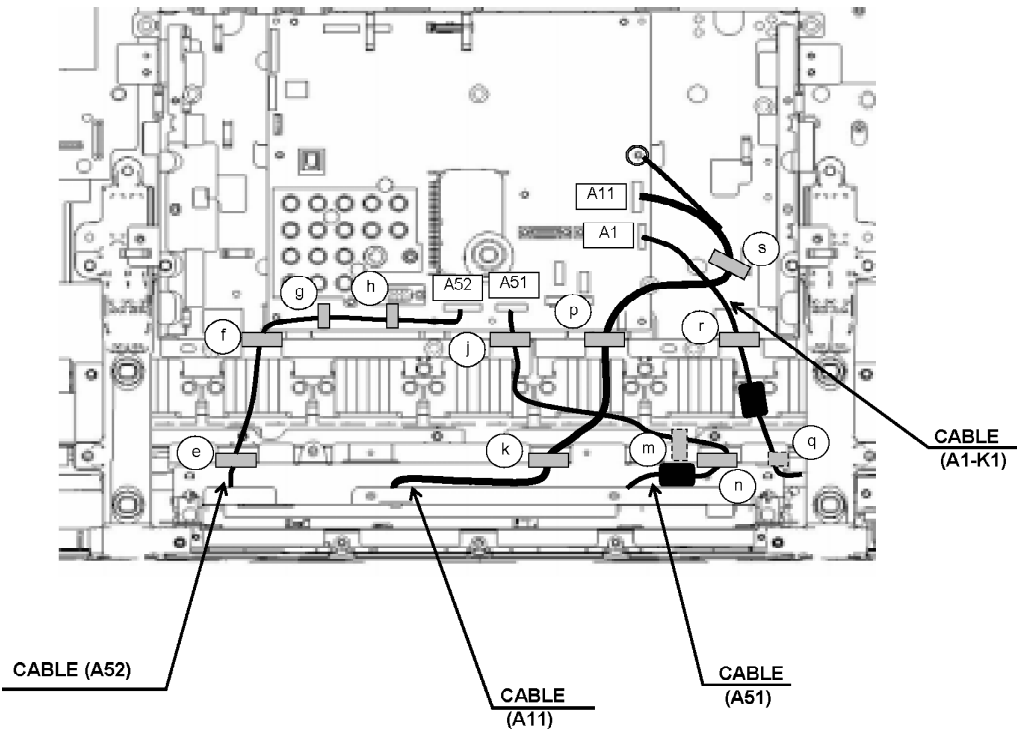

CABLE	e	f	g	h	j	k	m	n	p	q	r	s
A52	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>								
A11						<input type="radio"/>			<input type="radio"/>			<input type="radio"/>
A51					<input type="radio"/>		<input type="radio"/>	<input type="radio"/>				
A1-K1										<input type="radio"/>	<input type="radio"/>	

10.6. Wiring (5)

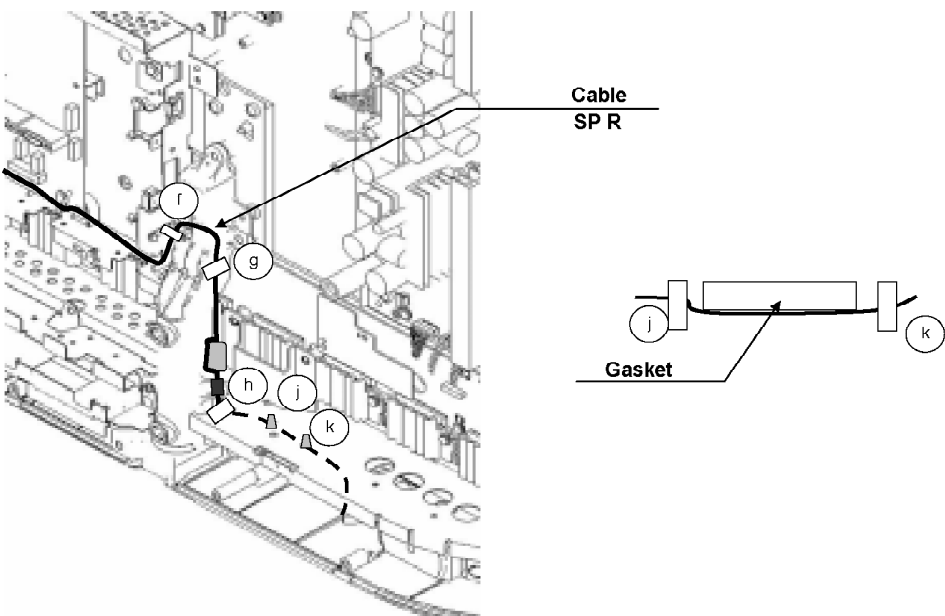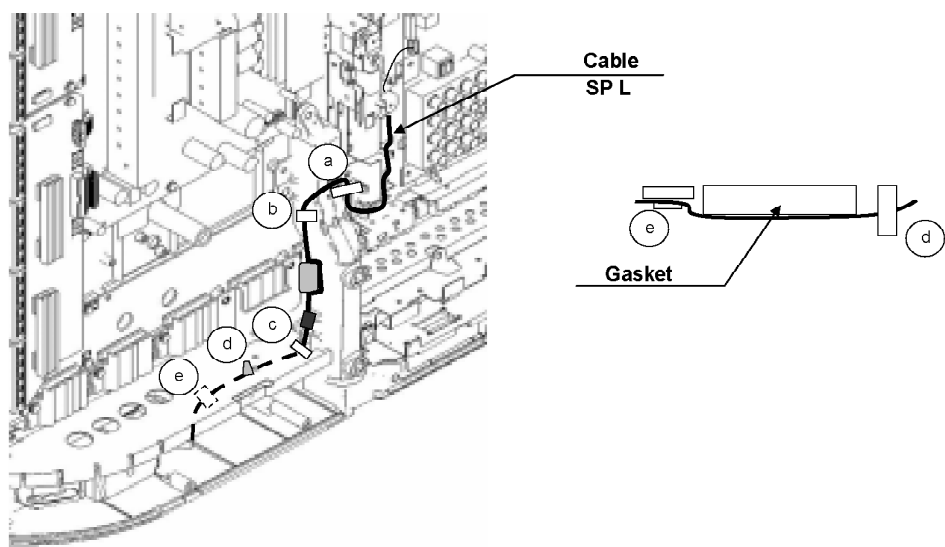

CABLE F	a	b	c	d	e	f	g	h	j	k
CABLE SP RIGHT						○	○	○	○	○
CABLE SP LEFT	○	○	○	○	○					

11 Schematic Diagram

11.1. Schematic Diagram Note

Important Safety Notice

Components identified by Δ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

Notes:

1. Resistor

Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
2. Capacitor

Unit of capacitance is μF, unless otherwise noted.
3. Coil

Unit of inductance is H, unless otherwise noted.
4. Test Point

○ : Test Point position
5. Earth Symbol

: Chassis Earth (Cold)

⇩ : Line Earth (Hot)
6. Voltage Measurement

Voltage is measured by a DC voltmeter.

Conditions of the measurement are the following:

Power Source AC120V, 50/60Hz

Receiving Signal Colour Bar signal (RF)

All customer's controls Maximum positions
7. When arrow mark (↗) is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video ➡ Audio ⇔
9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.

The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.

All circuits, except the Power Circuit, are cold.

Precautions

a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.


b. Do not short-circuit the hot and cold circuits or a fuse may blow and parts may break.

c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.


Connect the earth of instruments to the earth connection of the circuit being measured.

d. Make sure to disconnect the power plug before removing the chassis.

11.3. P-Board (2/2) Schematic Diagram

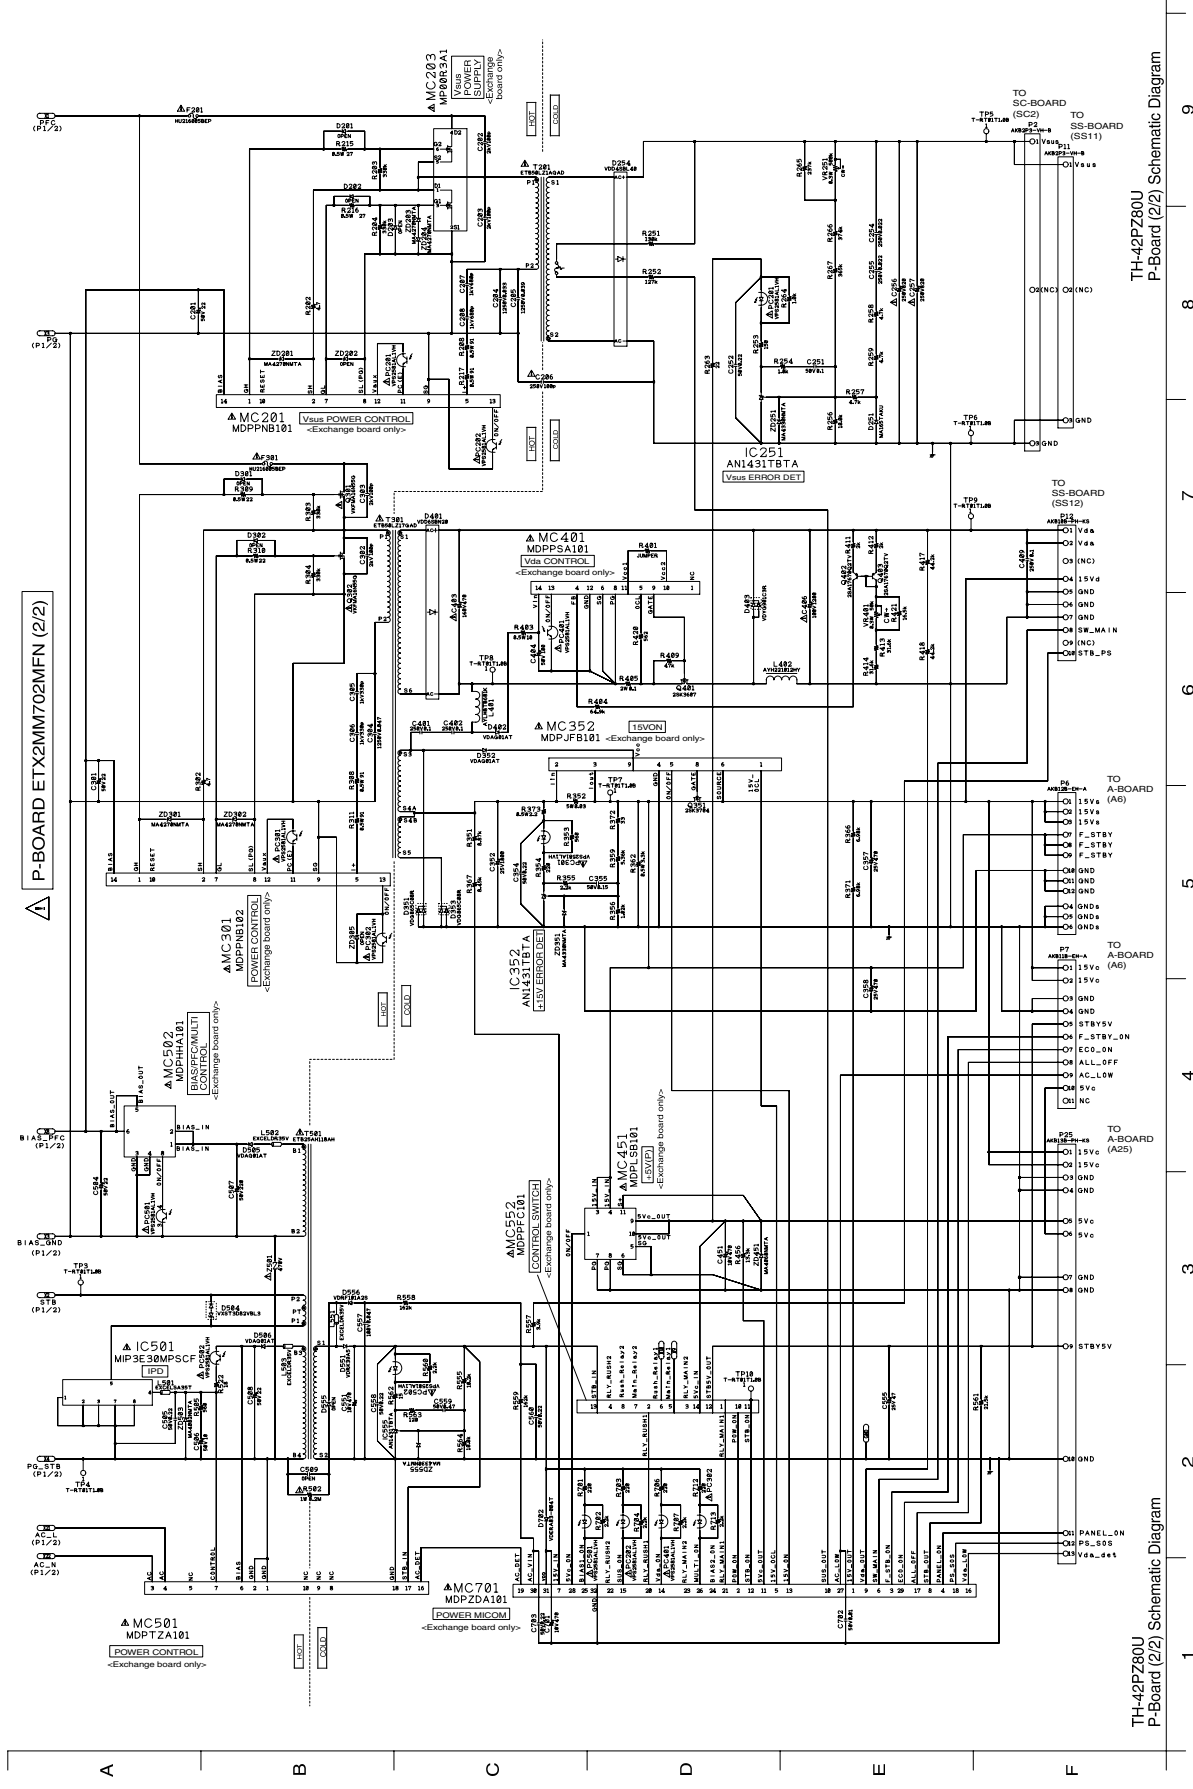


11.5. G, GS, K and S-Board Schematic Diagram

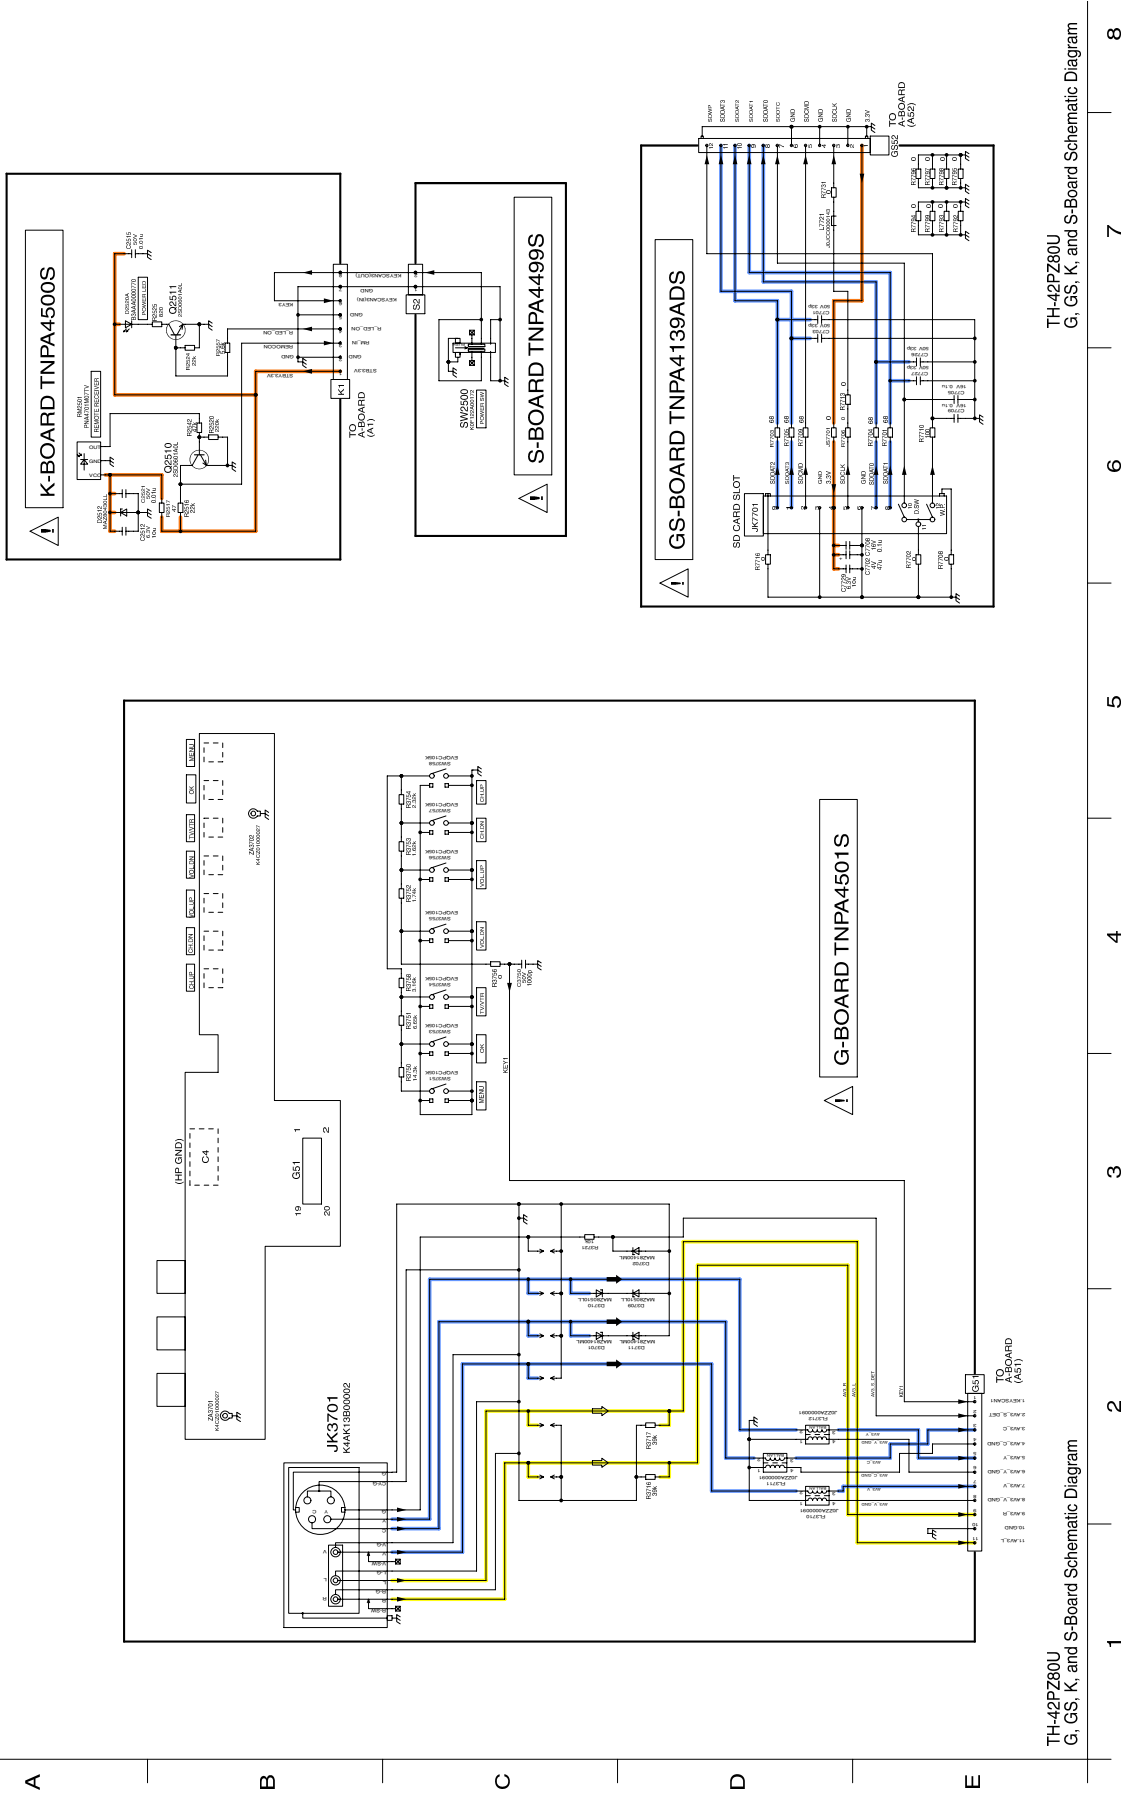

[illegible]



11.7. A-Board (1/12) Schematic Diagram

△ A-BOARD TNPH0721ADS (1/12) Peaks-Lite2p.DDR

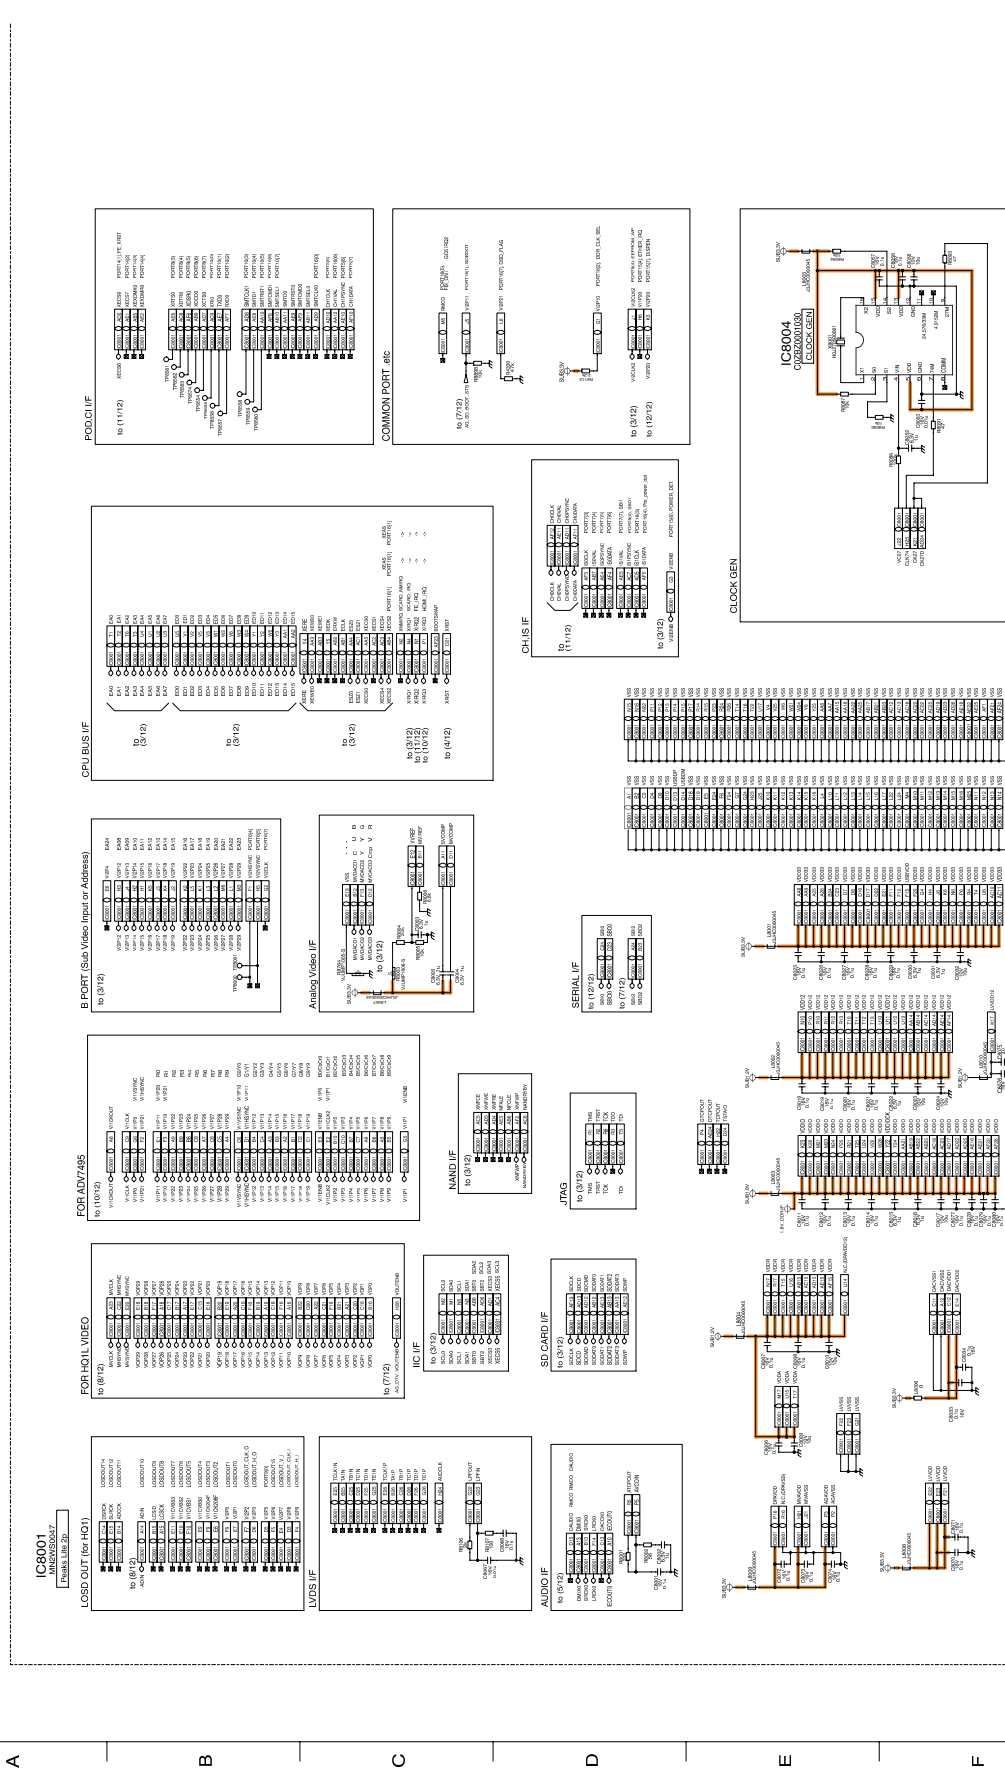


TH-42PZ80U A-Board (1/12) Schematic Diagram

11.8. A-Board (2/12) Schematic Diagram

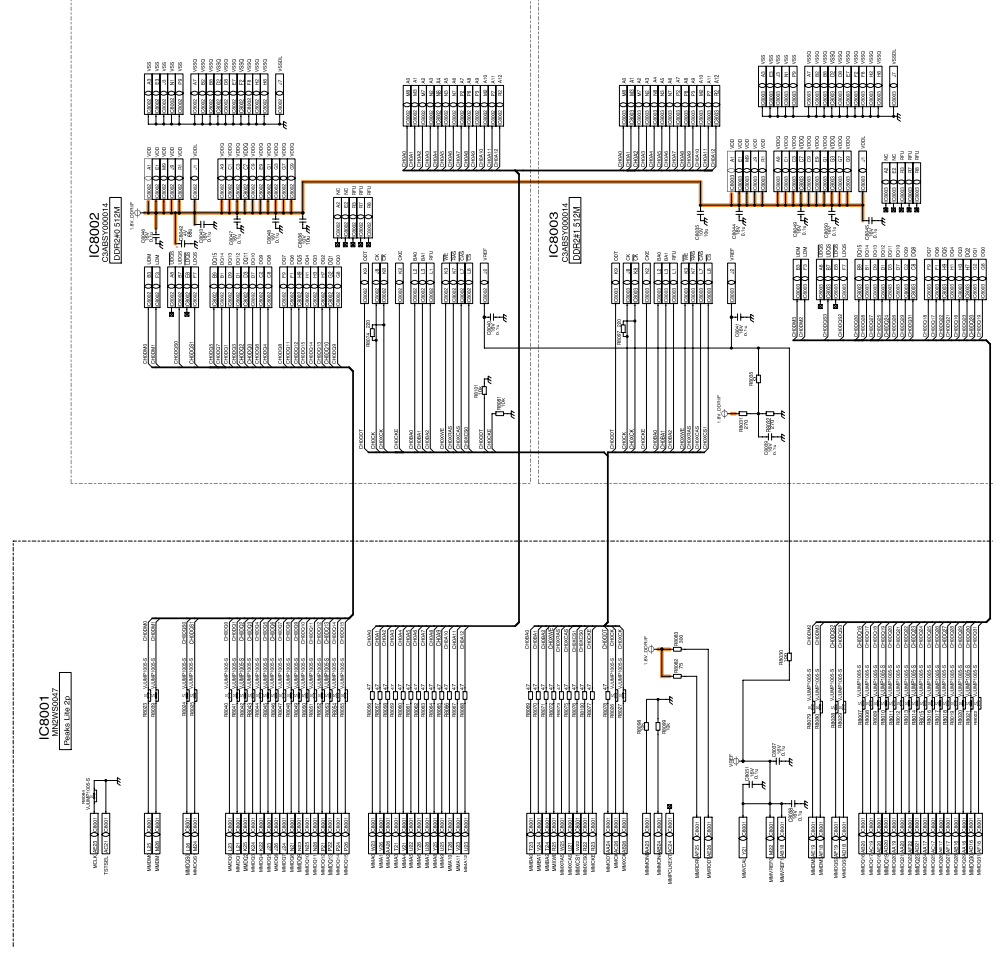


11.9. A-Board (3/12) Schematic Diagram

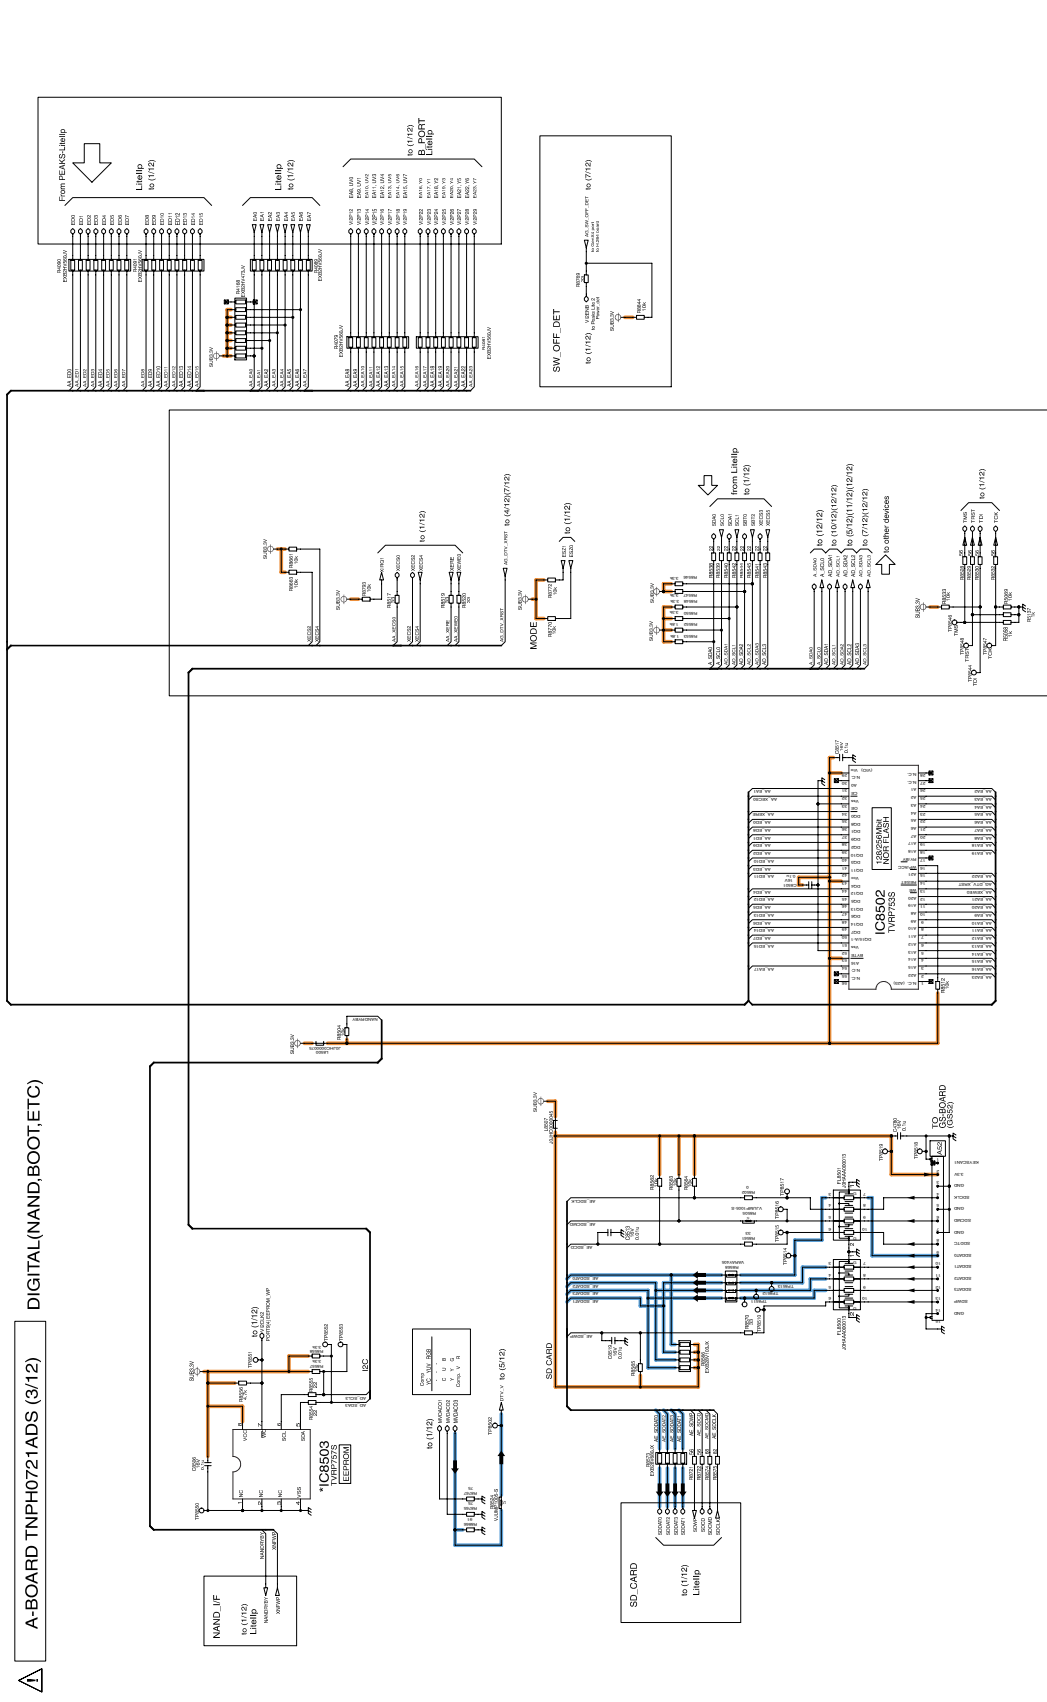


11.10. A-Board (4/12) Schematic Diagram

A-BOARD TNPH0721ADS (4/12)


POWER SUPPLY

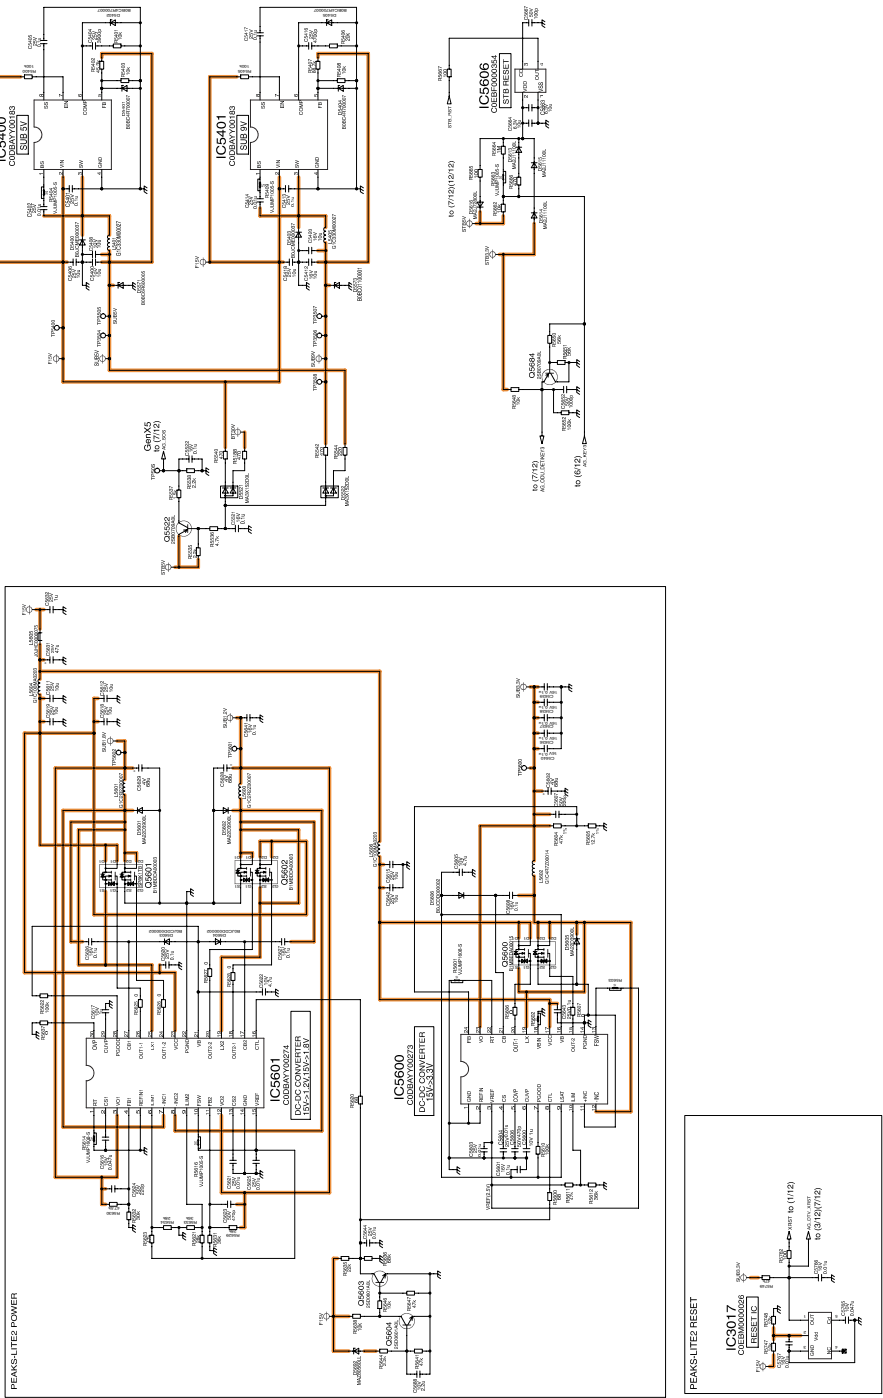

11.11. A-Board (5/12) Schematic Diagram

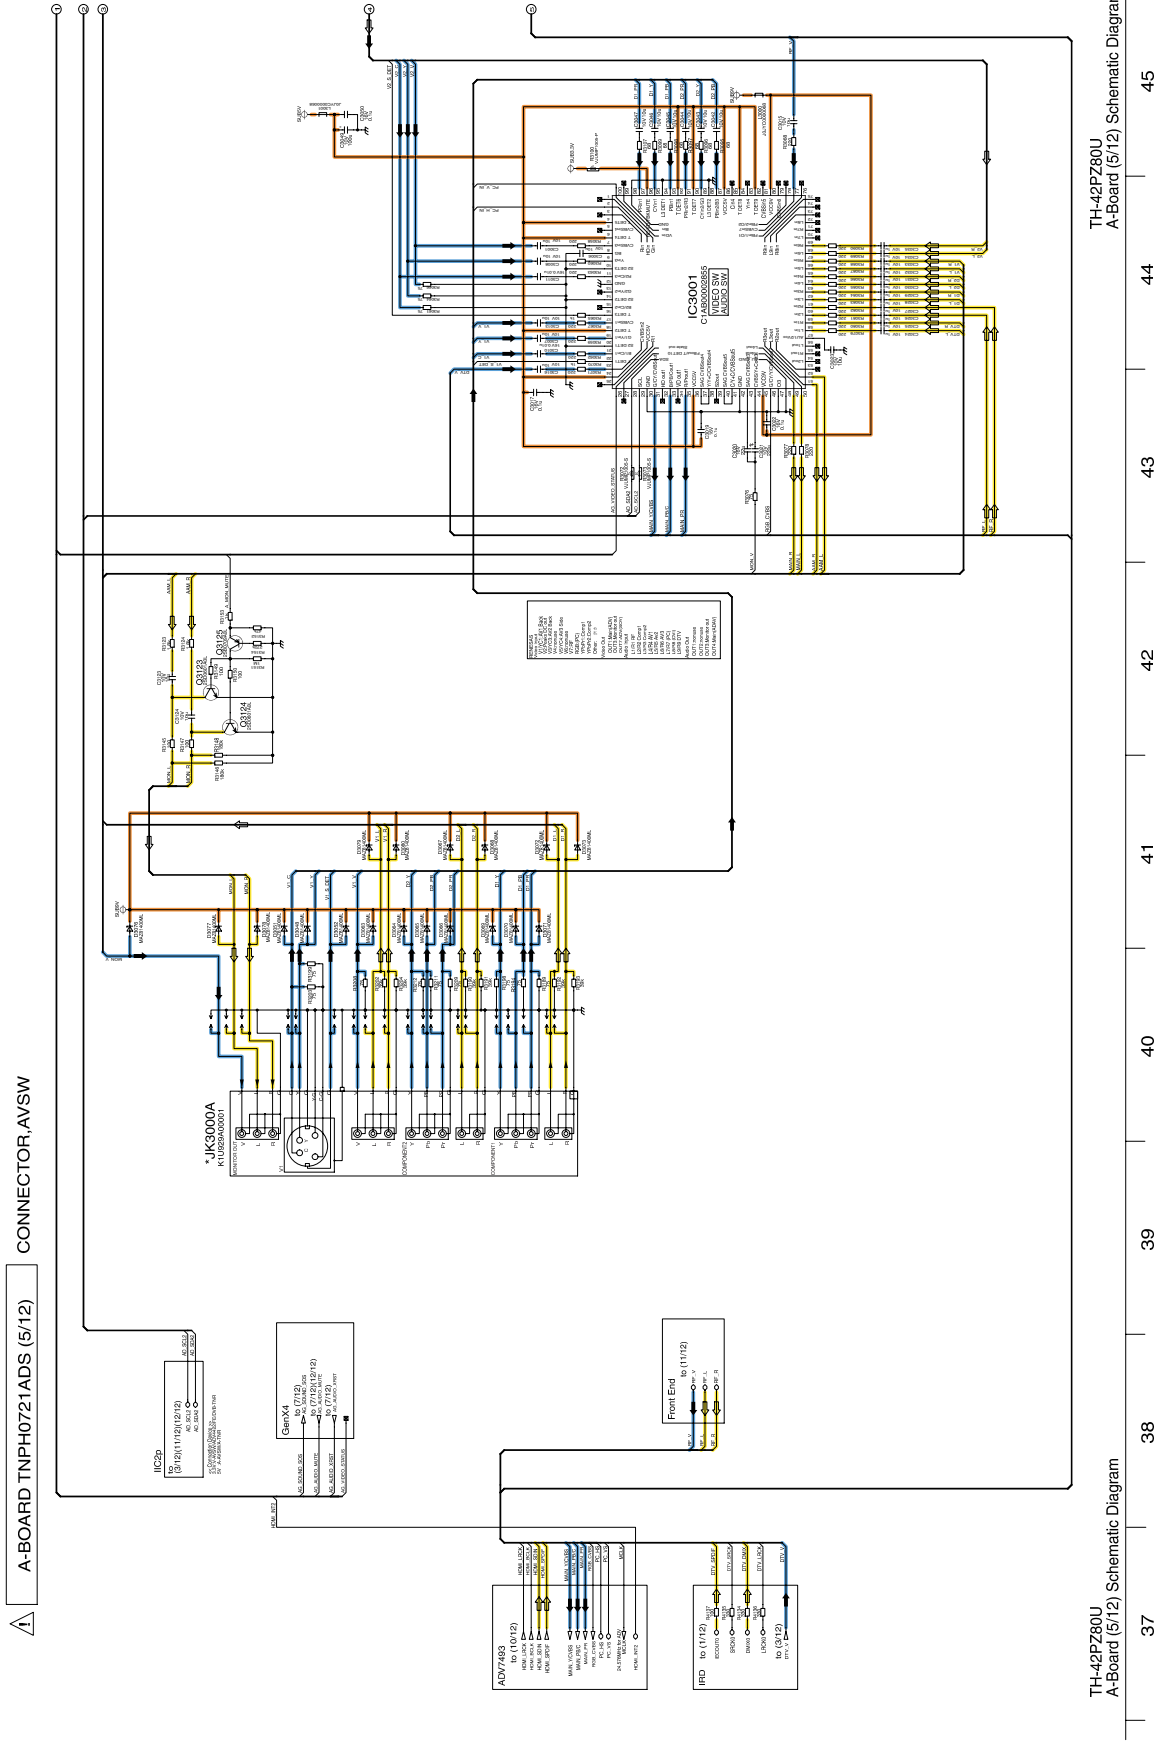


11.12. A-Board (6/12) Schematic Diagram

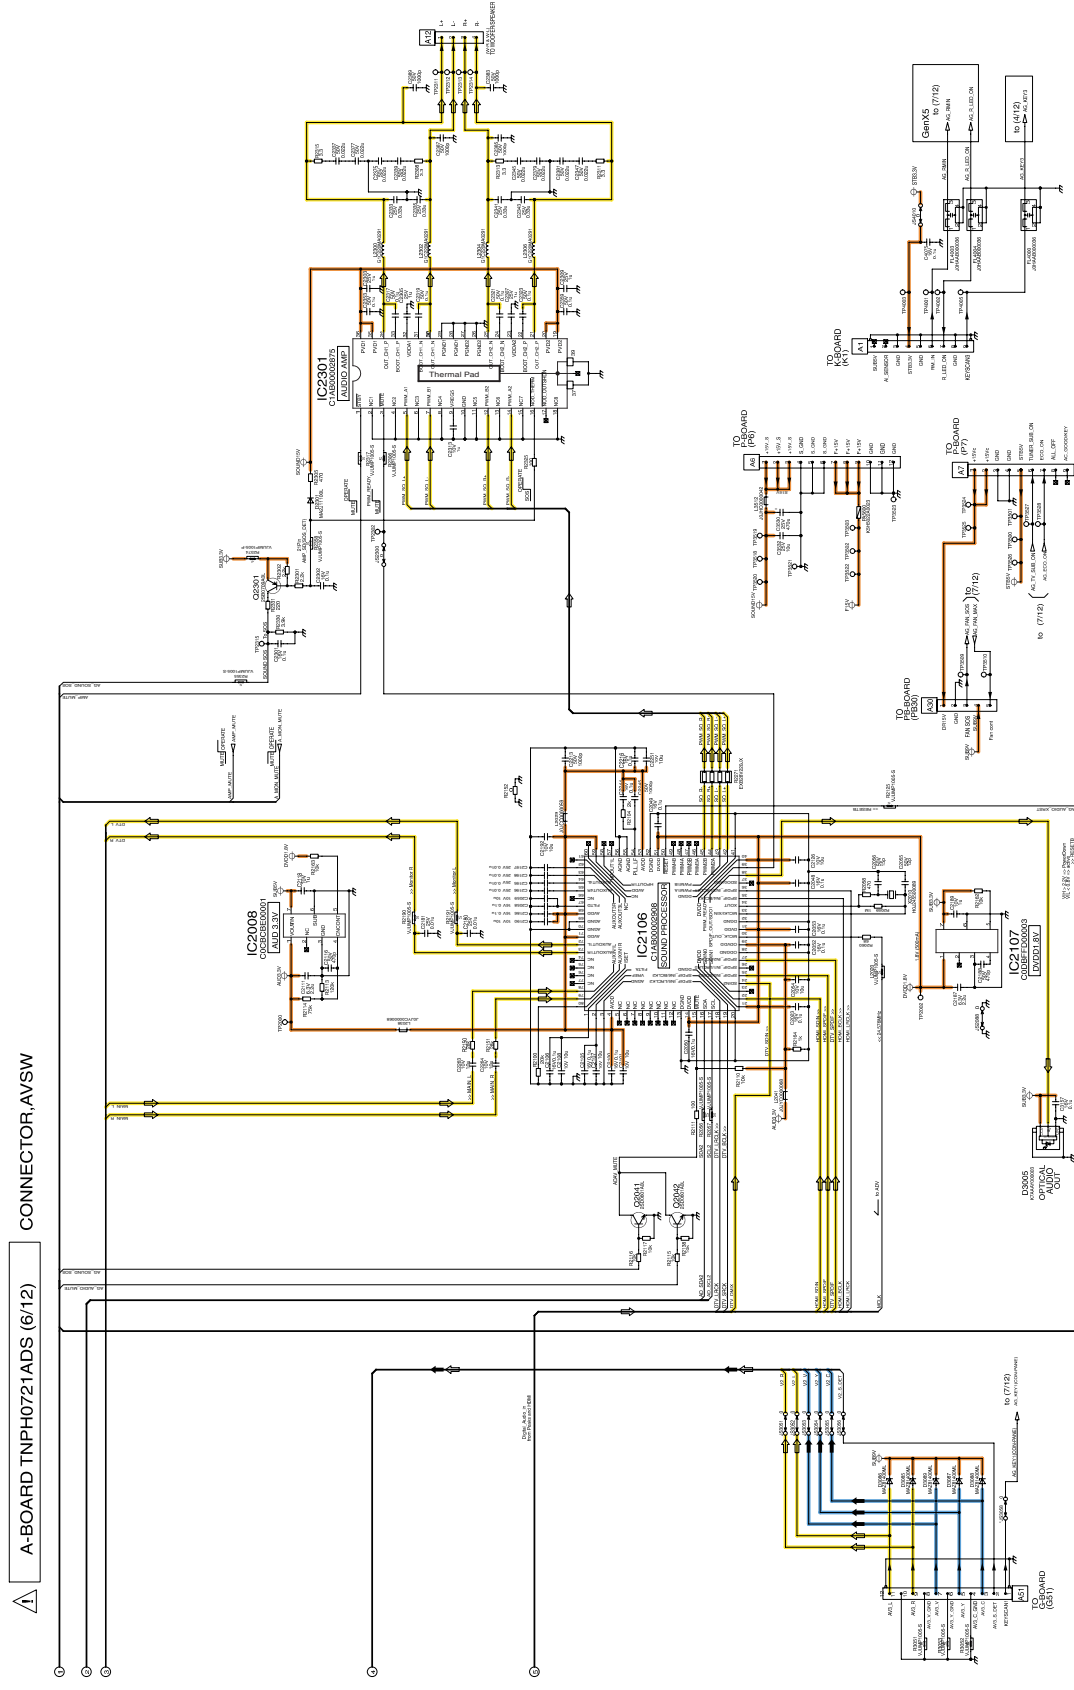


TH-42PZ80U

TH-42PZ80U


11.13. A-Board (7/12) Schematic Diagram

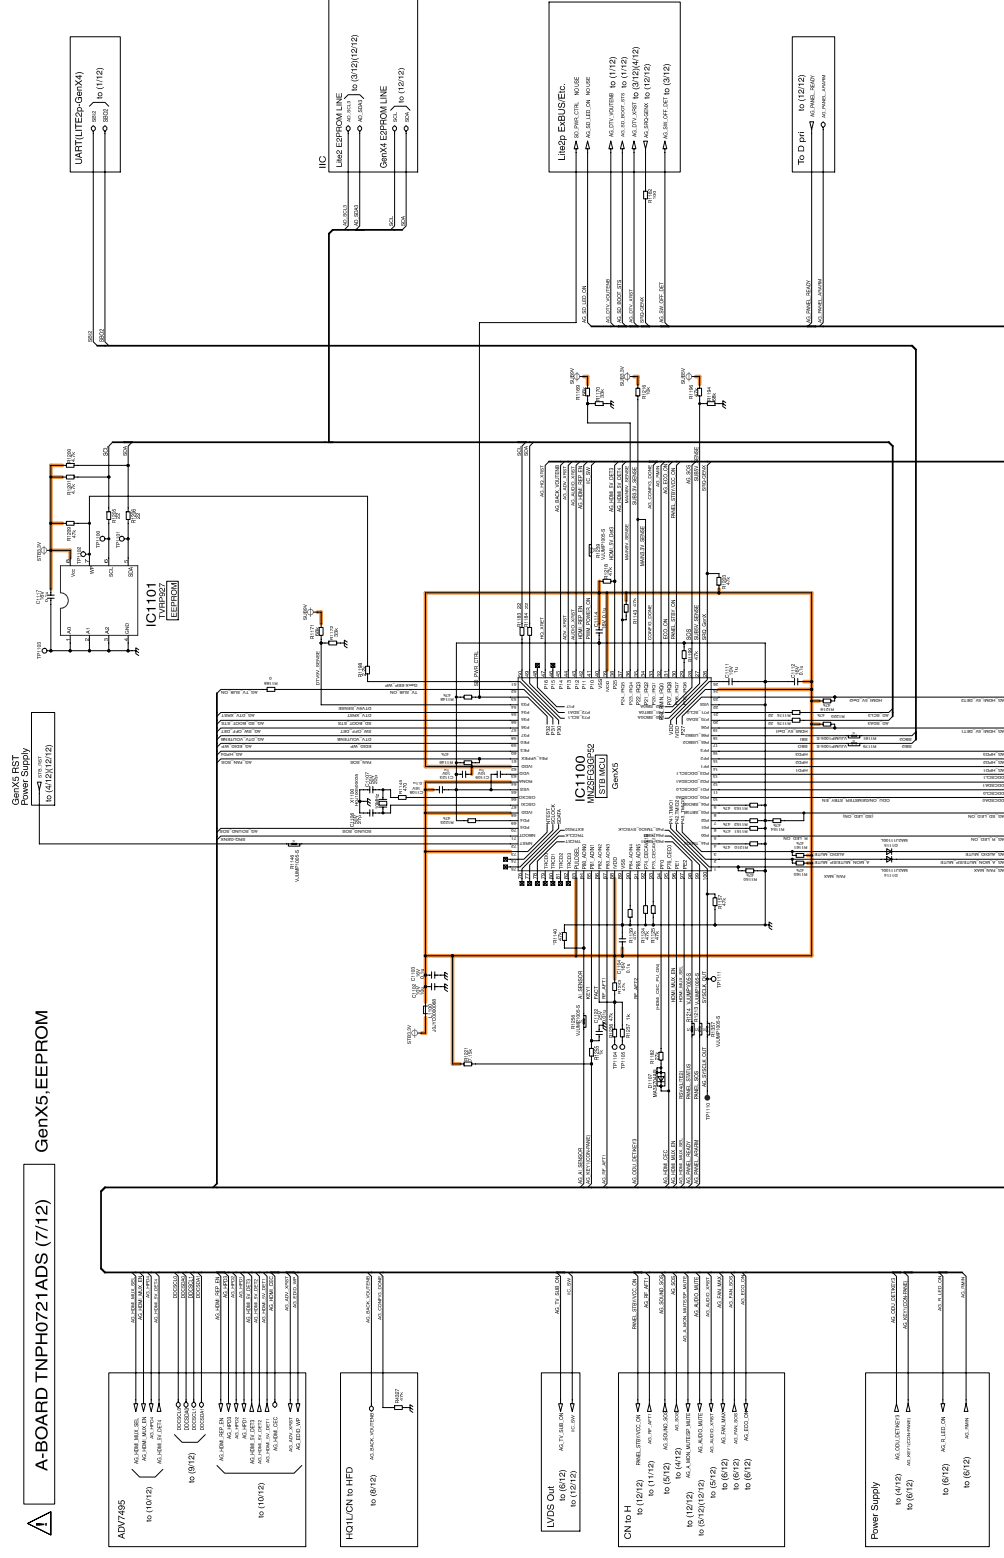

11.14. A-Board (8/12) Schematic Diagram

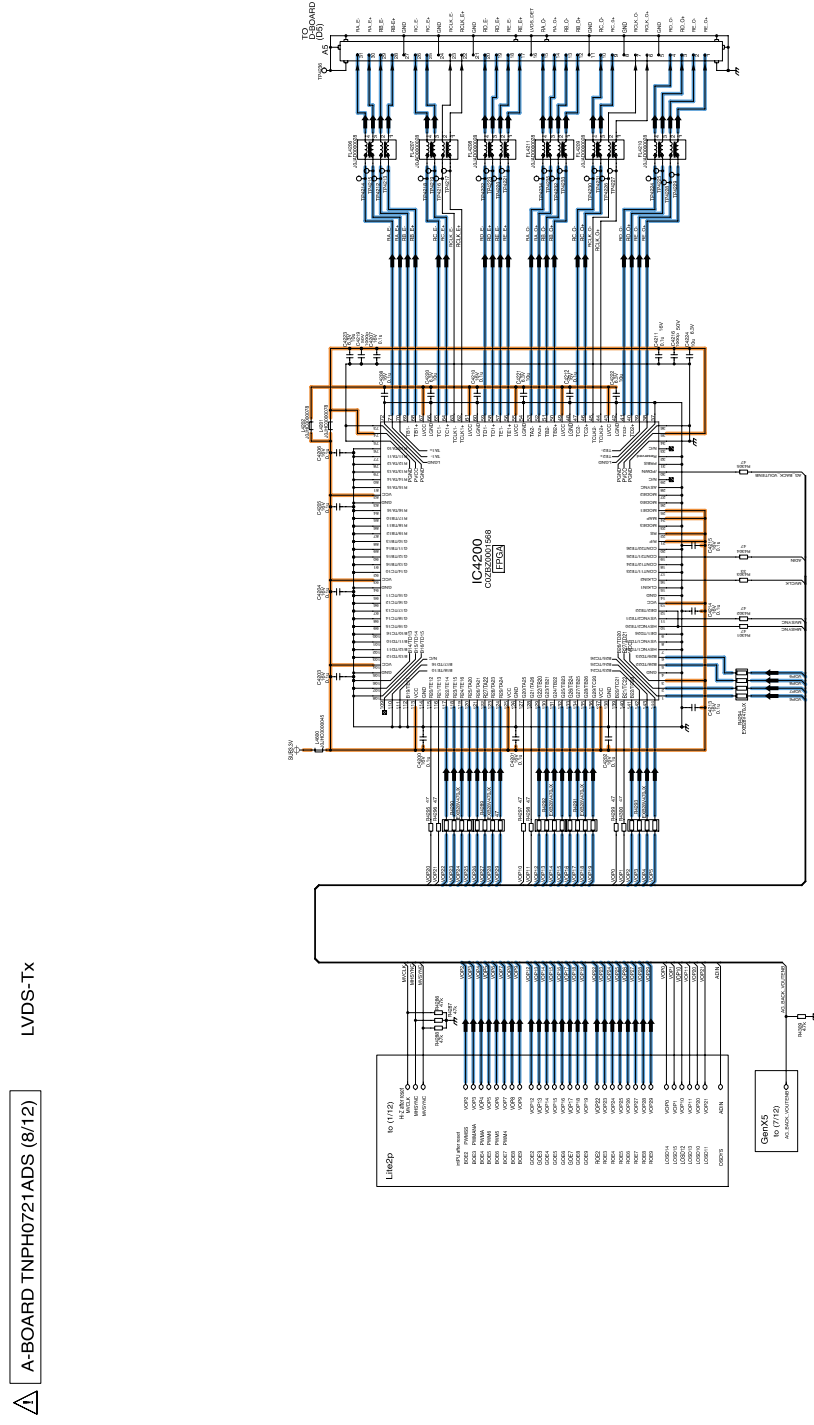


11.15. A-Board (9/12) Schematic Diagram

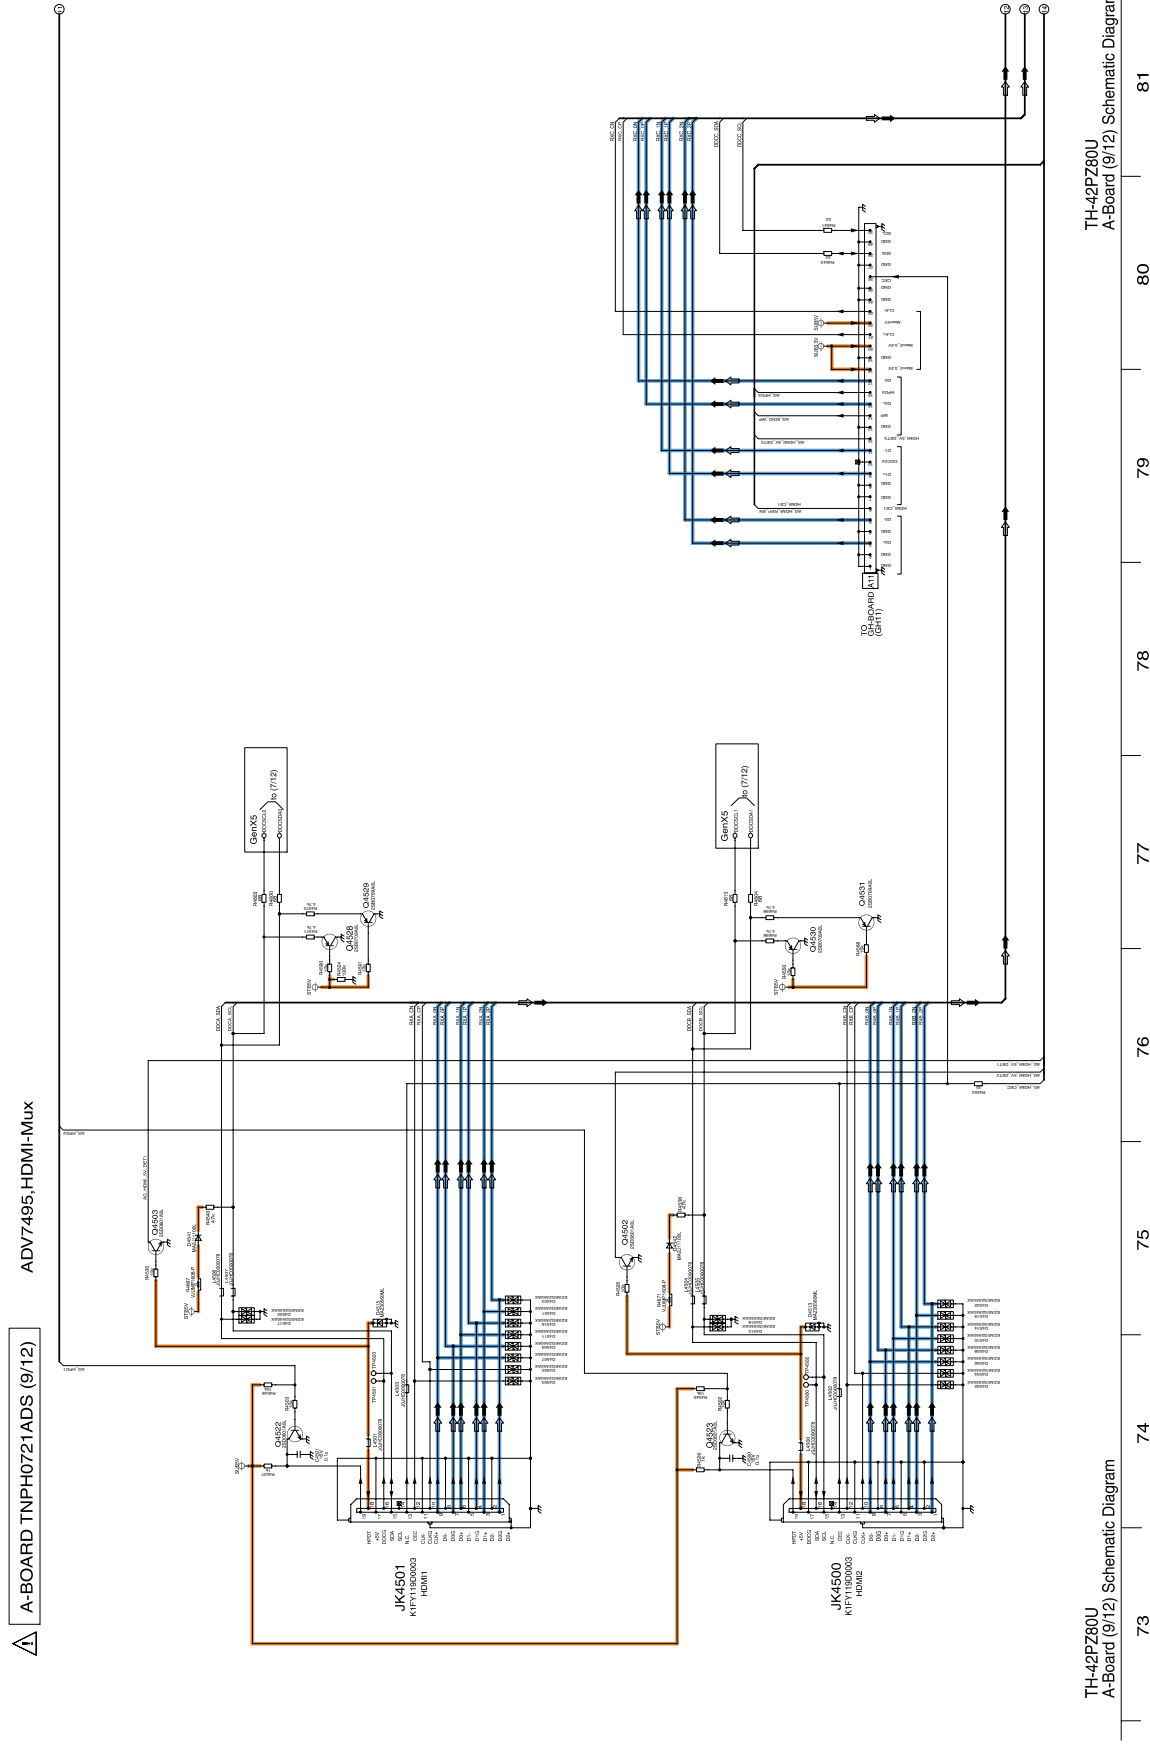


⚠ A-BOARD TNPH0721ADS (10/12) ADV7495,HDMI-Mux




11.17. A-Board (11/12) Schematic Diagram

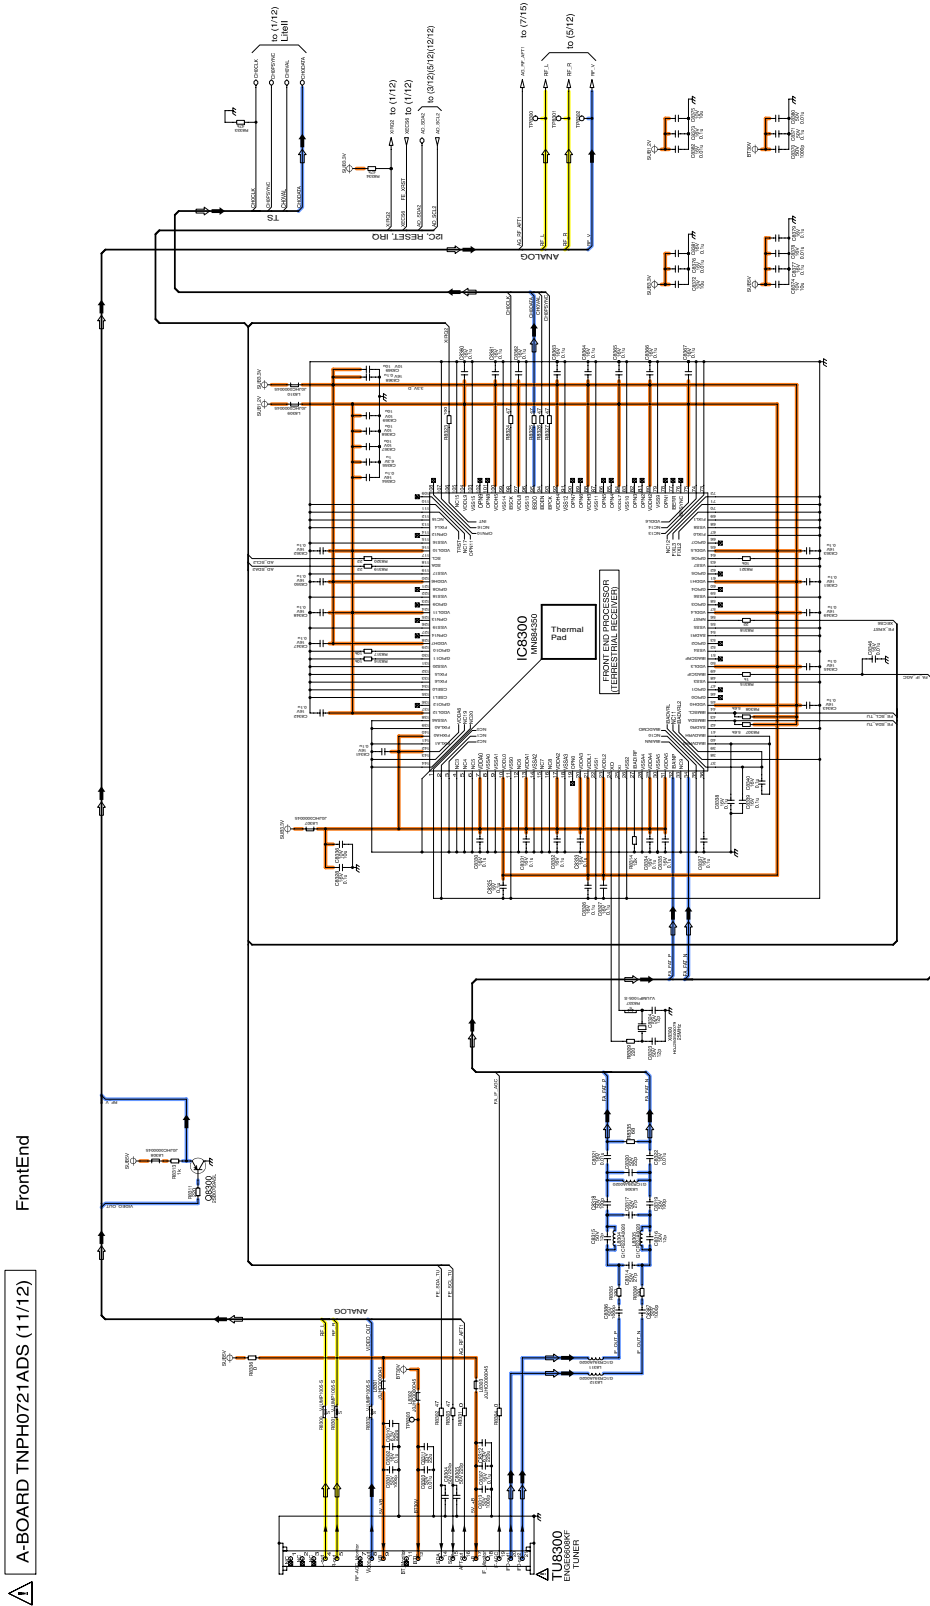


11.18. A-Board (12/12) Schematic Diagram

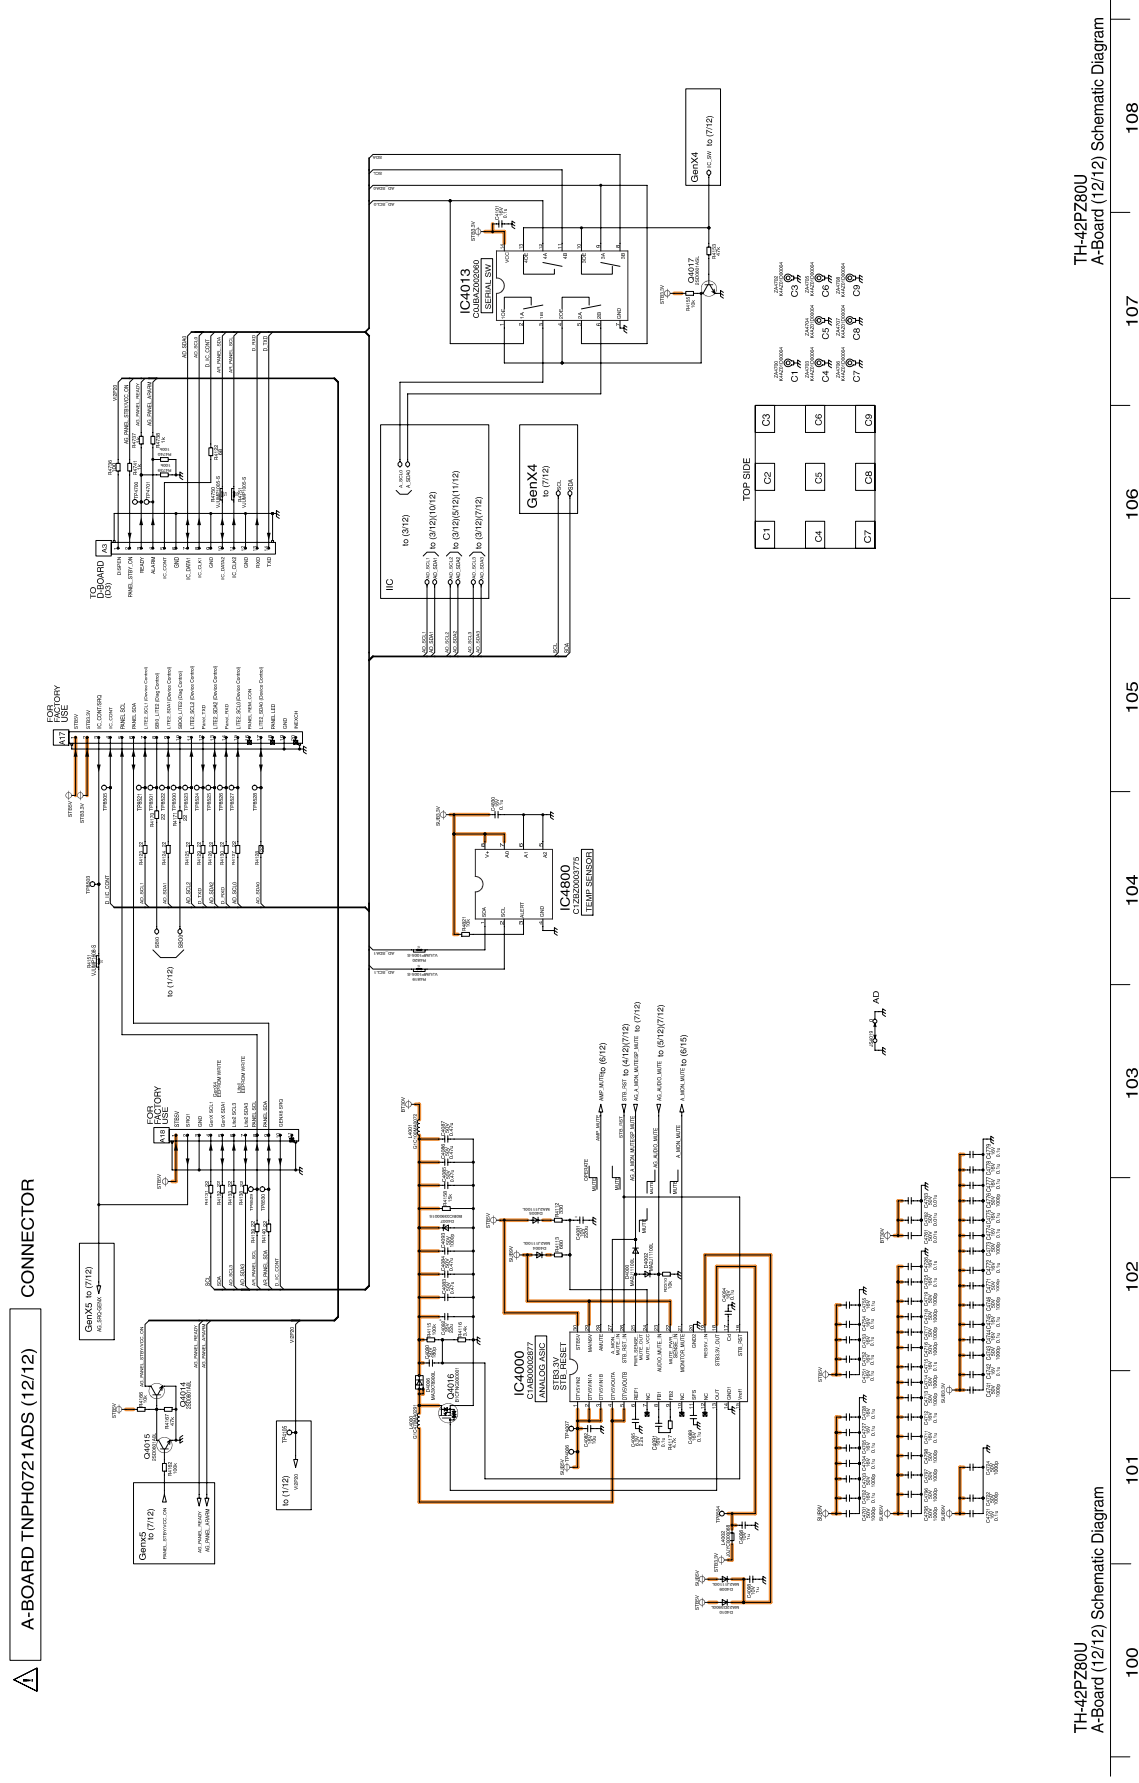

11.19. D-Board (1/6) Schematic Diagram

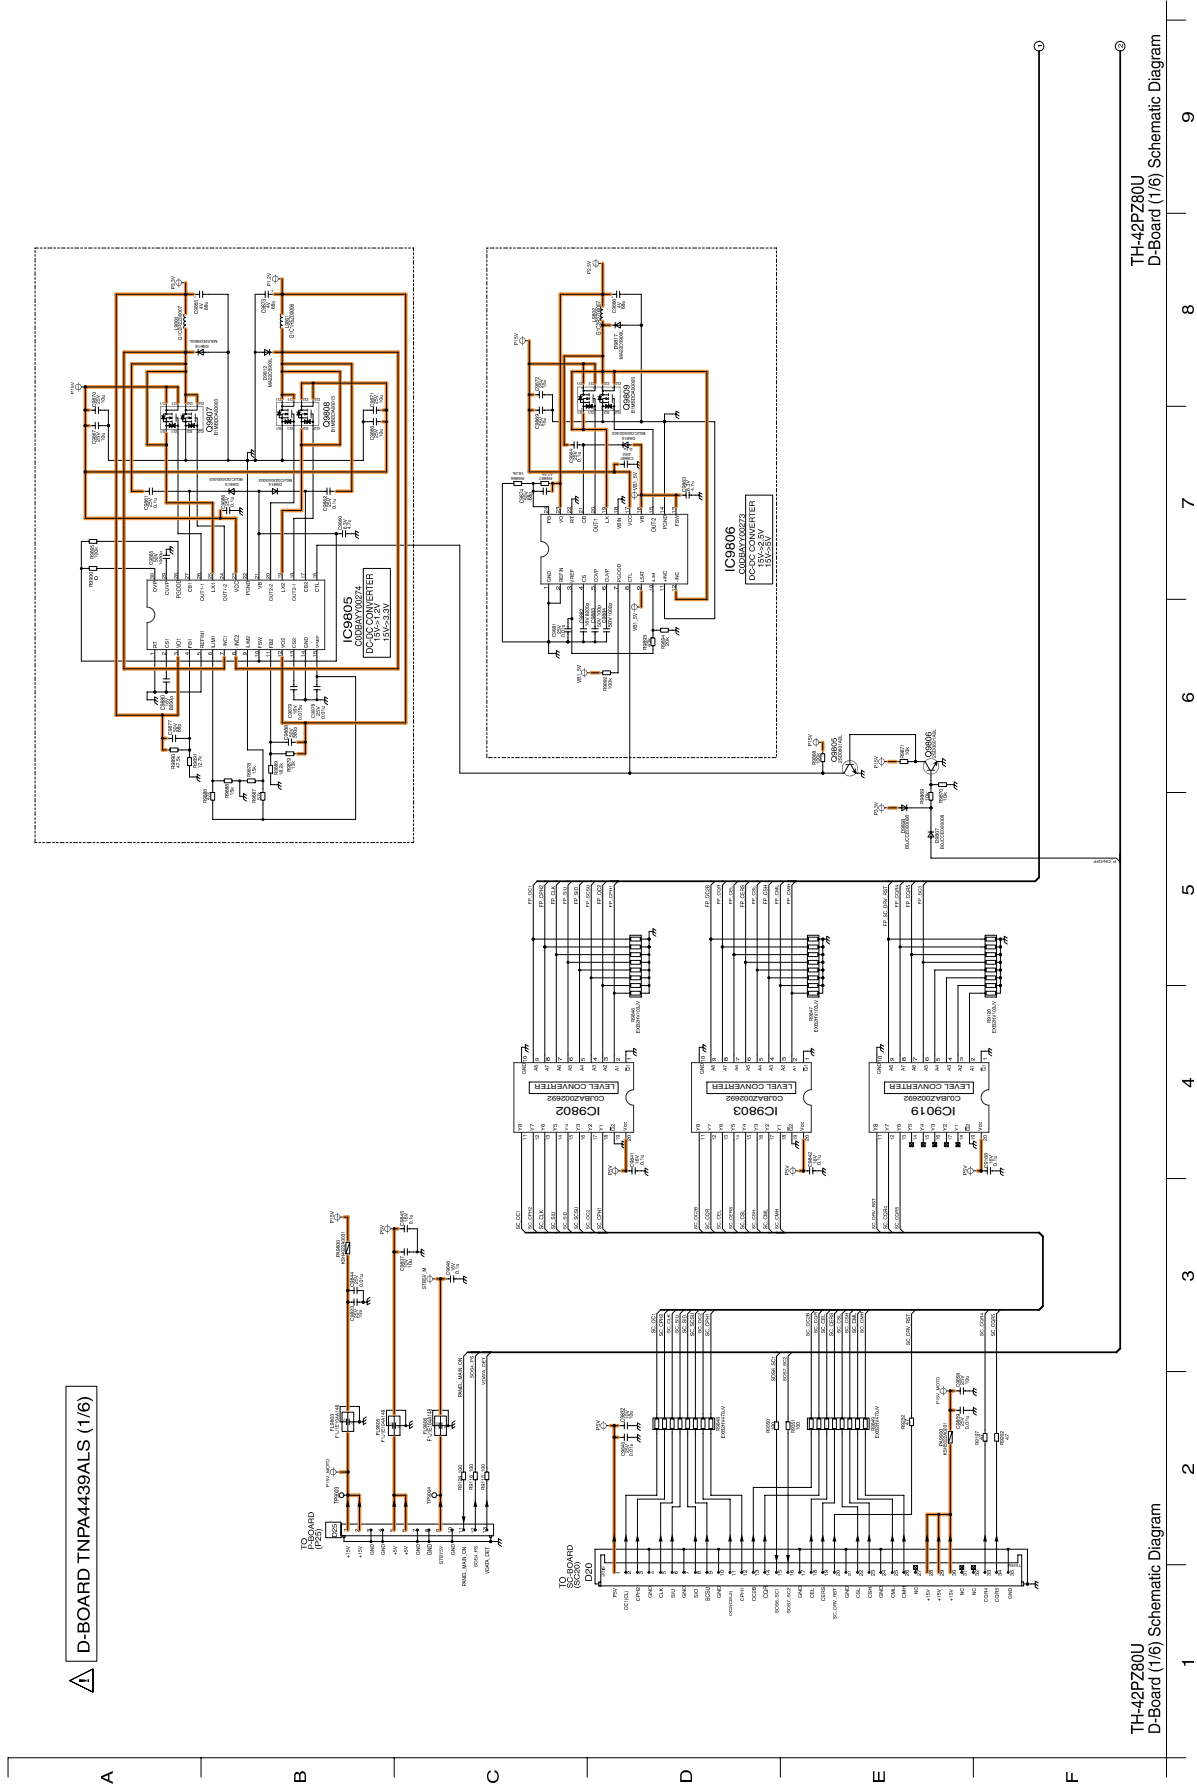


11.21. D-Board (3/6) Schematic Diagram

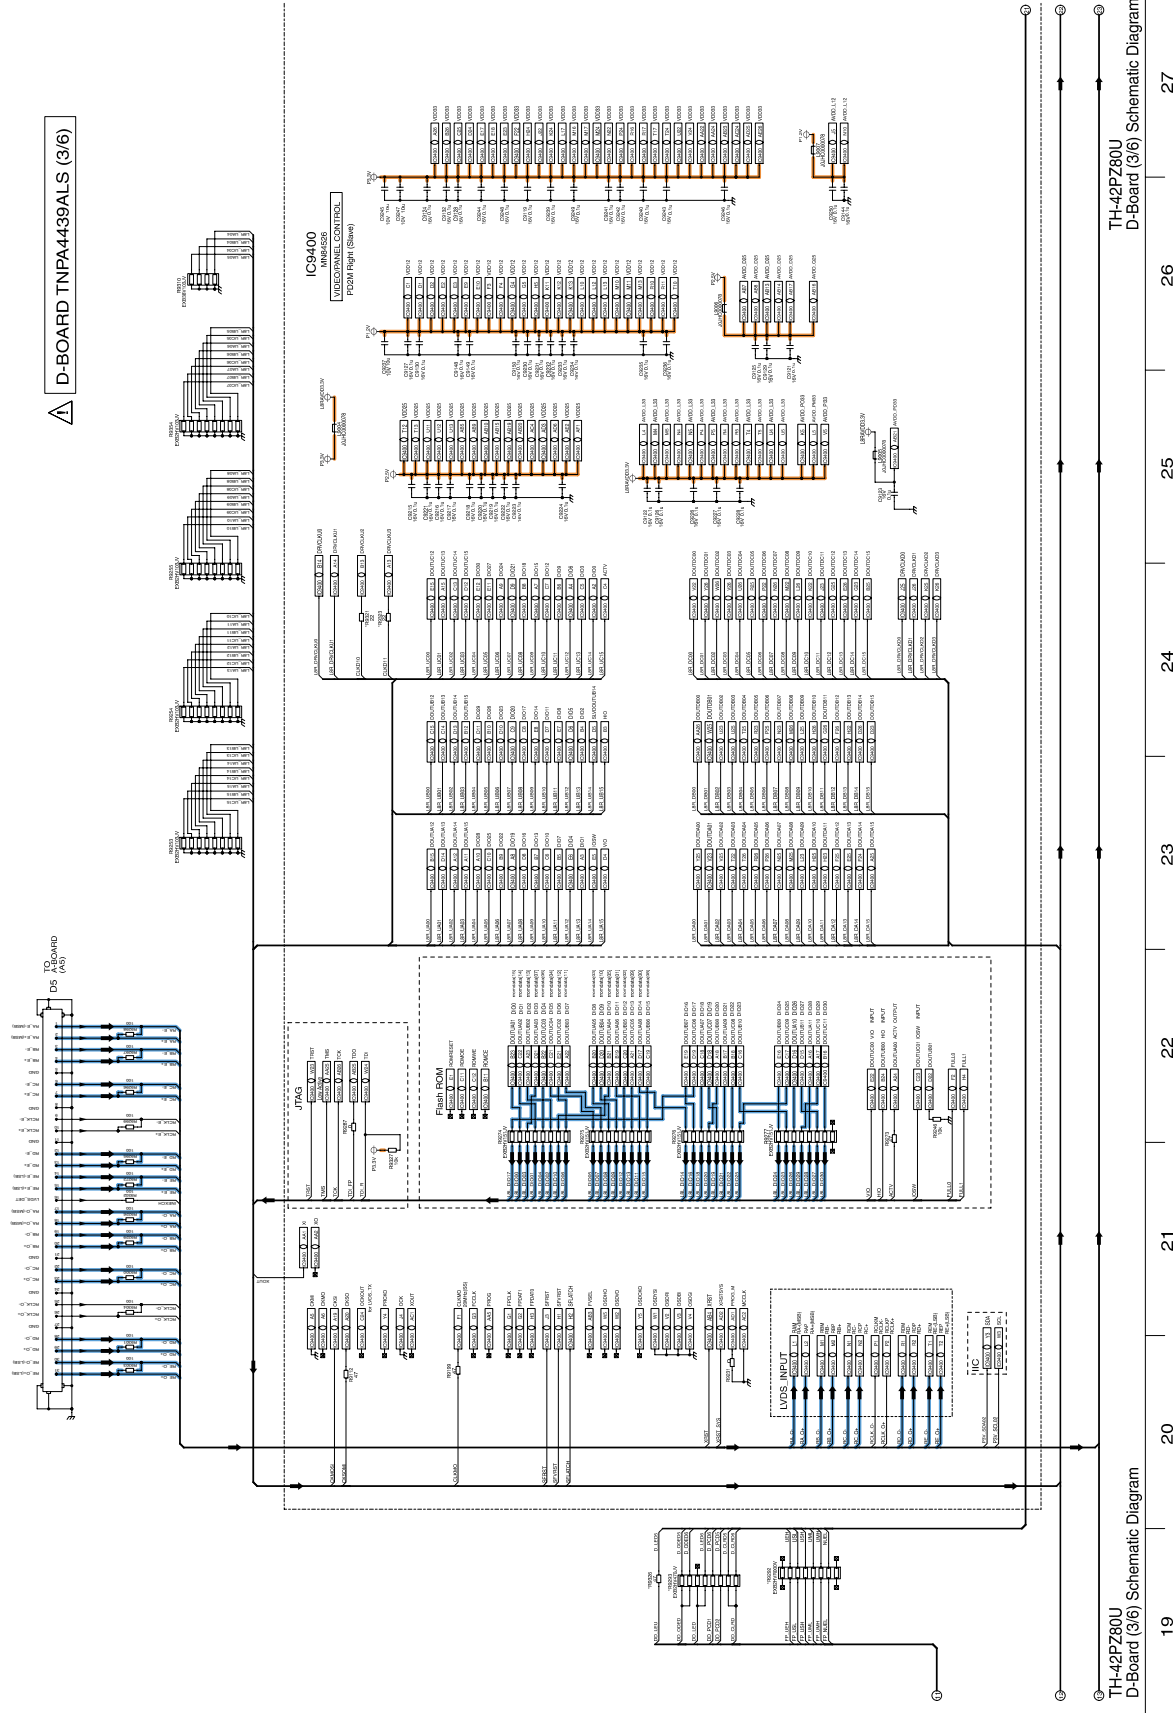


11.22. D-Board (4/6) Schematic Diagram


⚠ D-BOARD TNPA4439ALS (4/6)

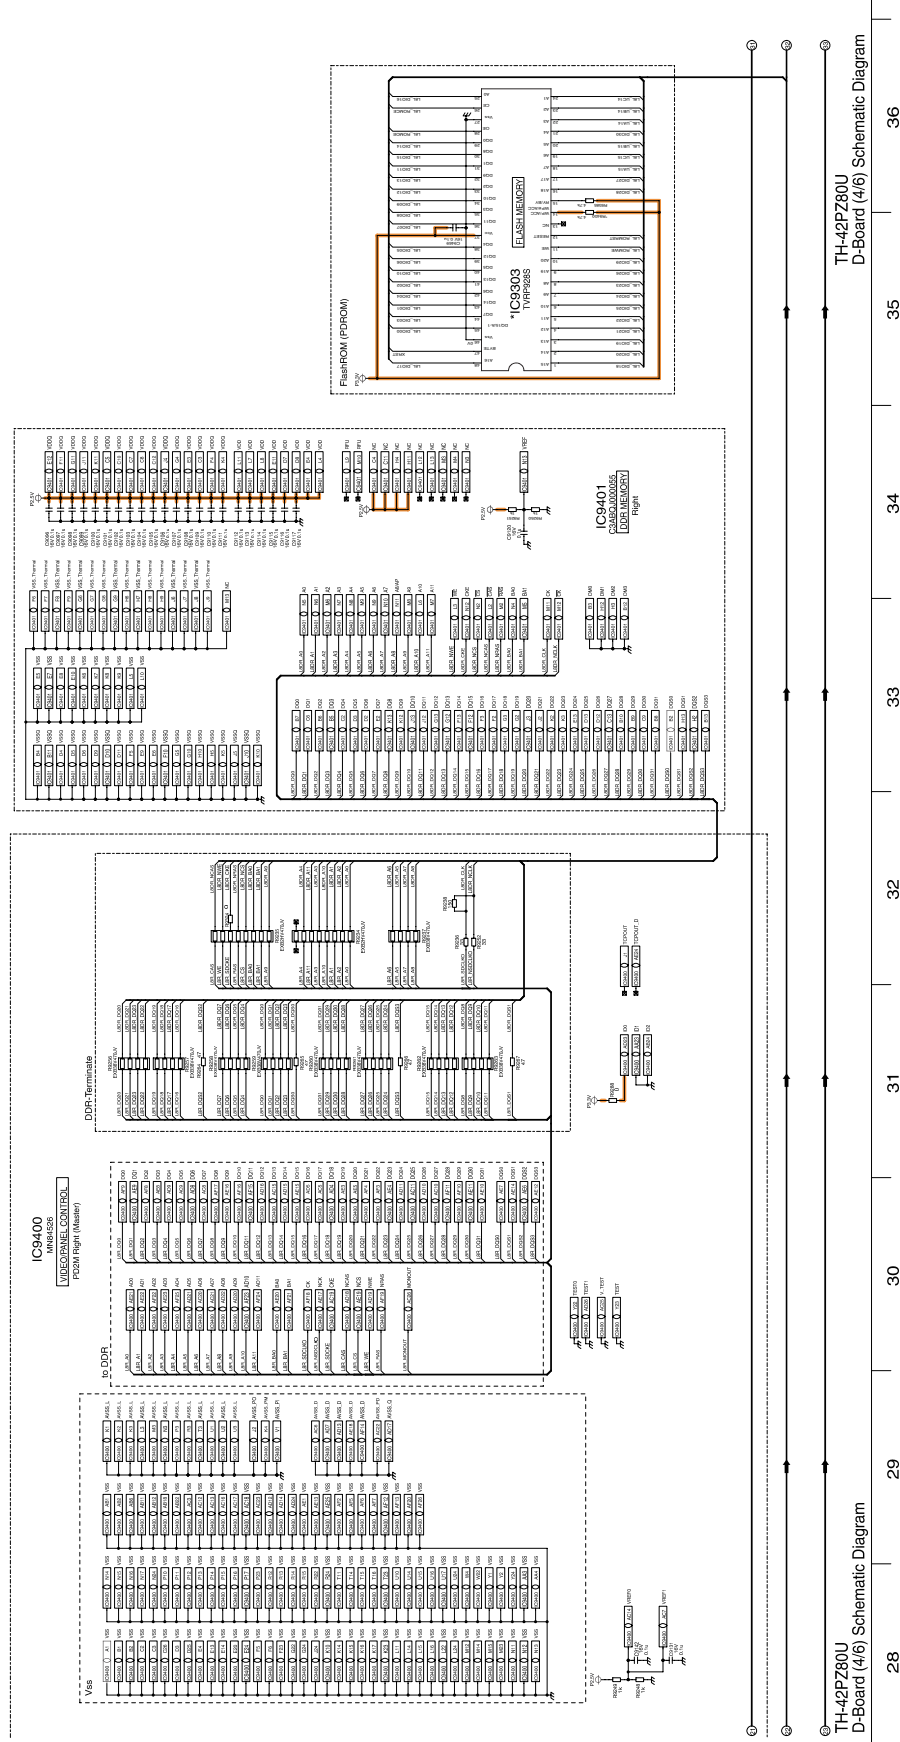

11.23. D-Board (5/6) Schematic Diagram

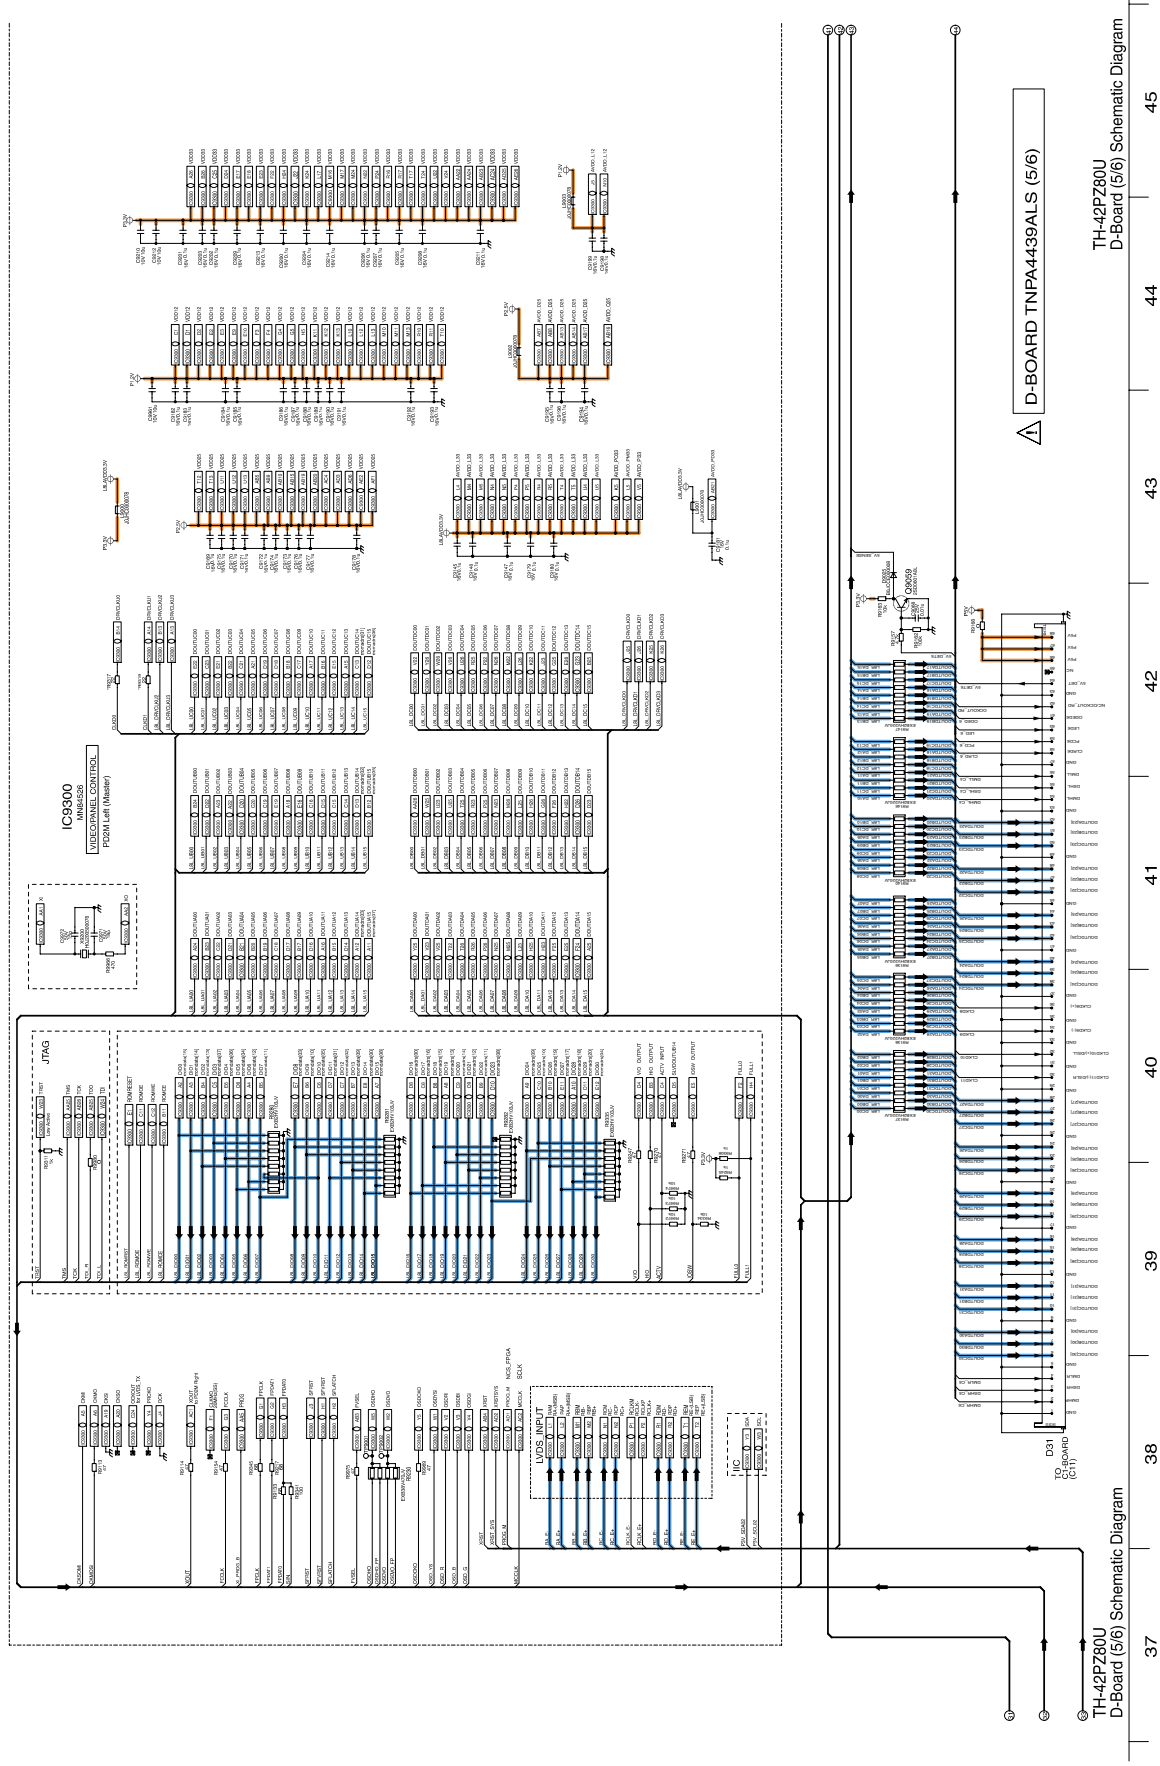

11.24. D-Board (6/6) Schematic Diagram

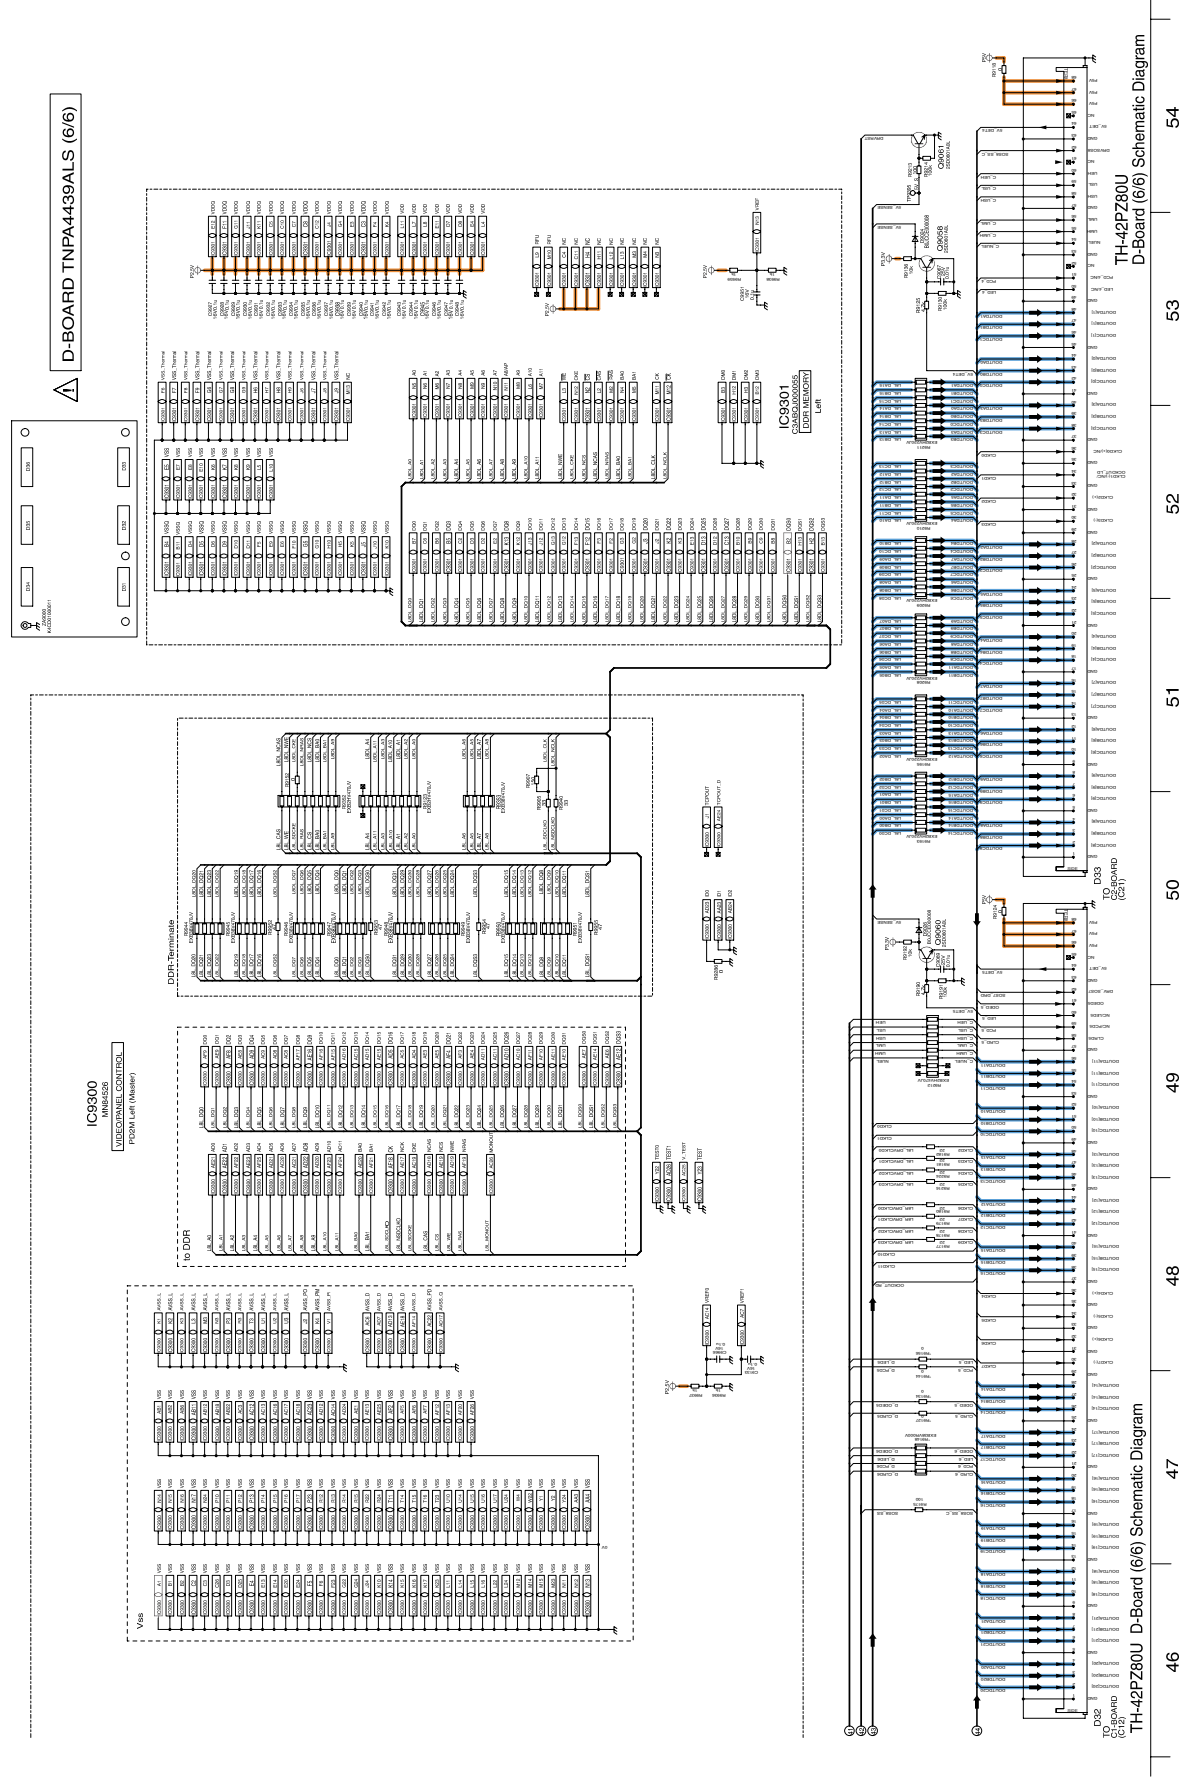

C1-BOARD TXNC11RLTU (1/3)


TH-42PZ80U C1-Board (1/3) Schematic Diagram

TH-42PZ80U C1-Board (1/3) Schematic Diagram


⚠ C1-BOARD TXNC11RLTU (2/3)



11.27. C1-Board (3/3) Schematic Diagram

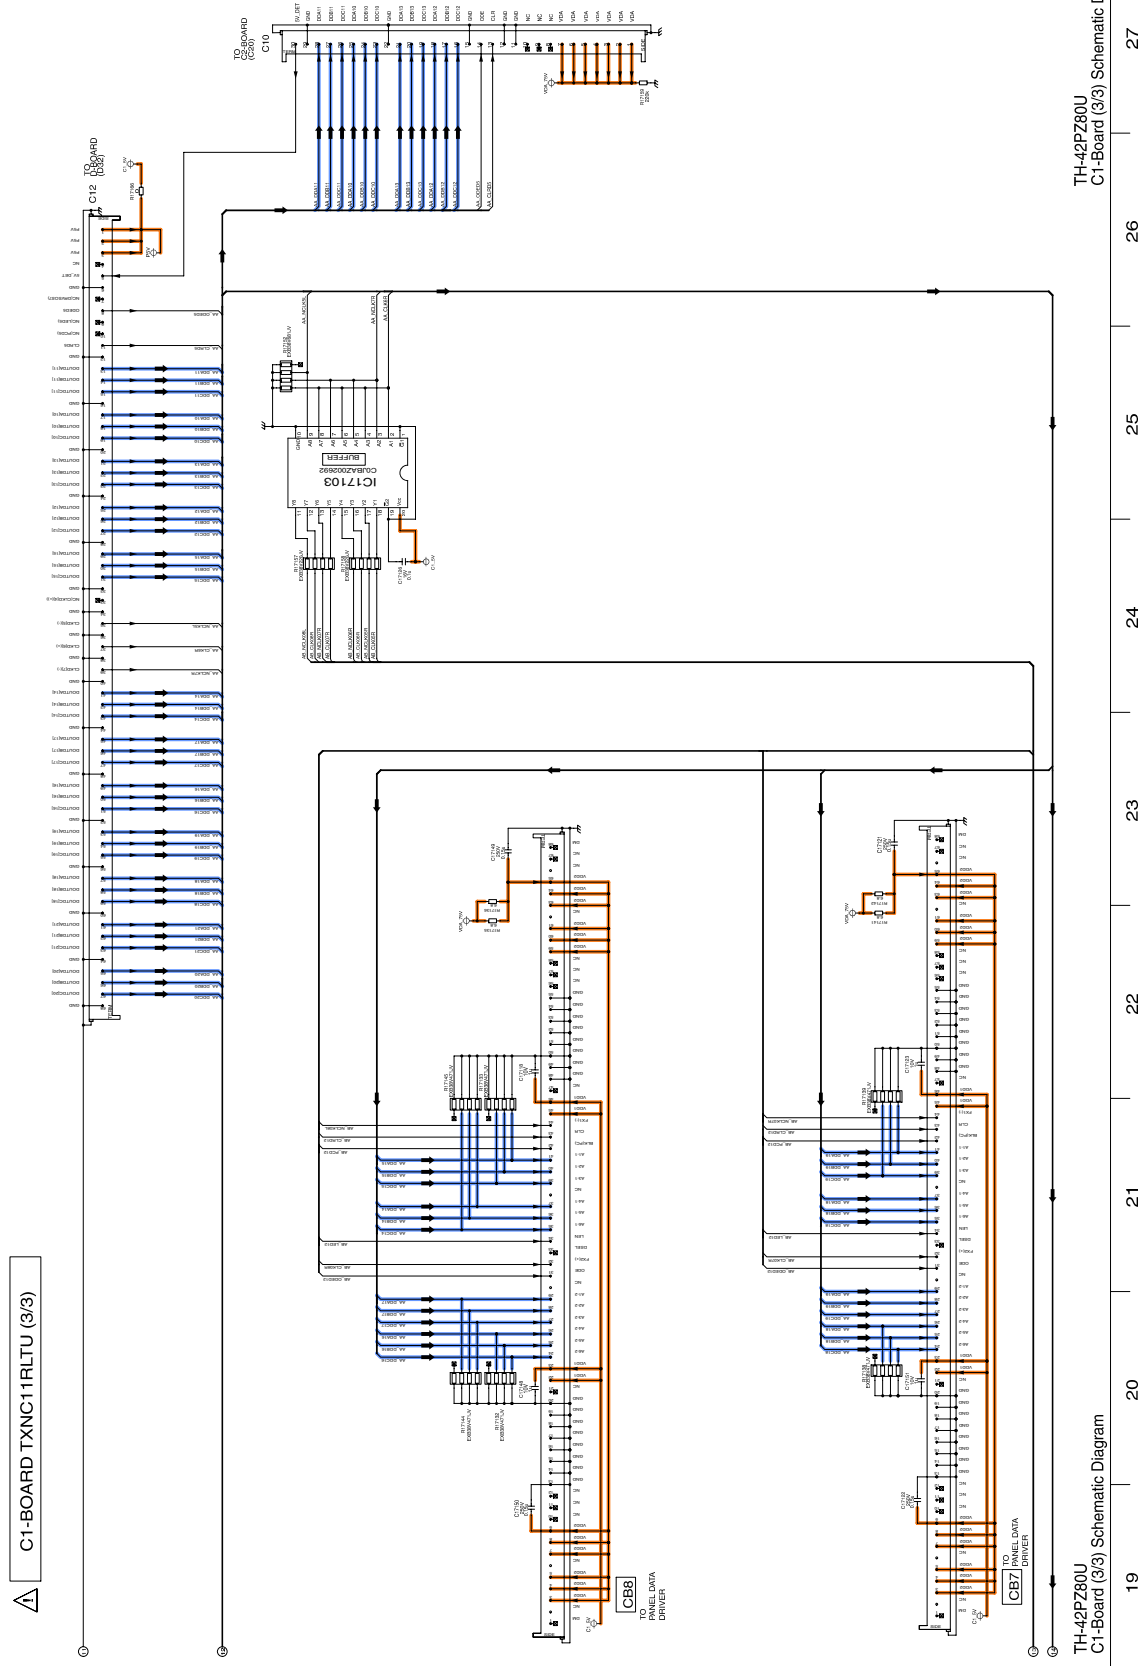


11.28. C2-Board (1/3) Schematic Diagram

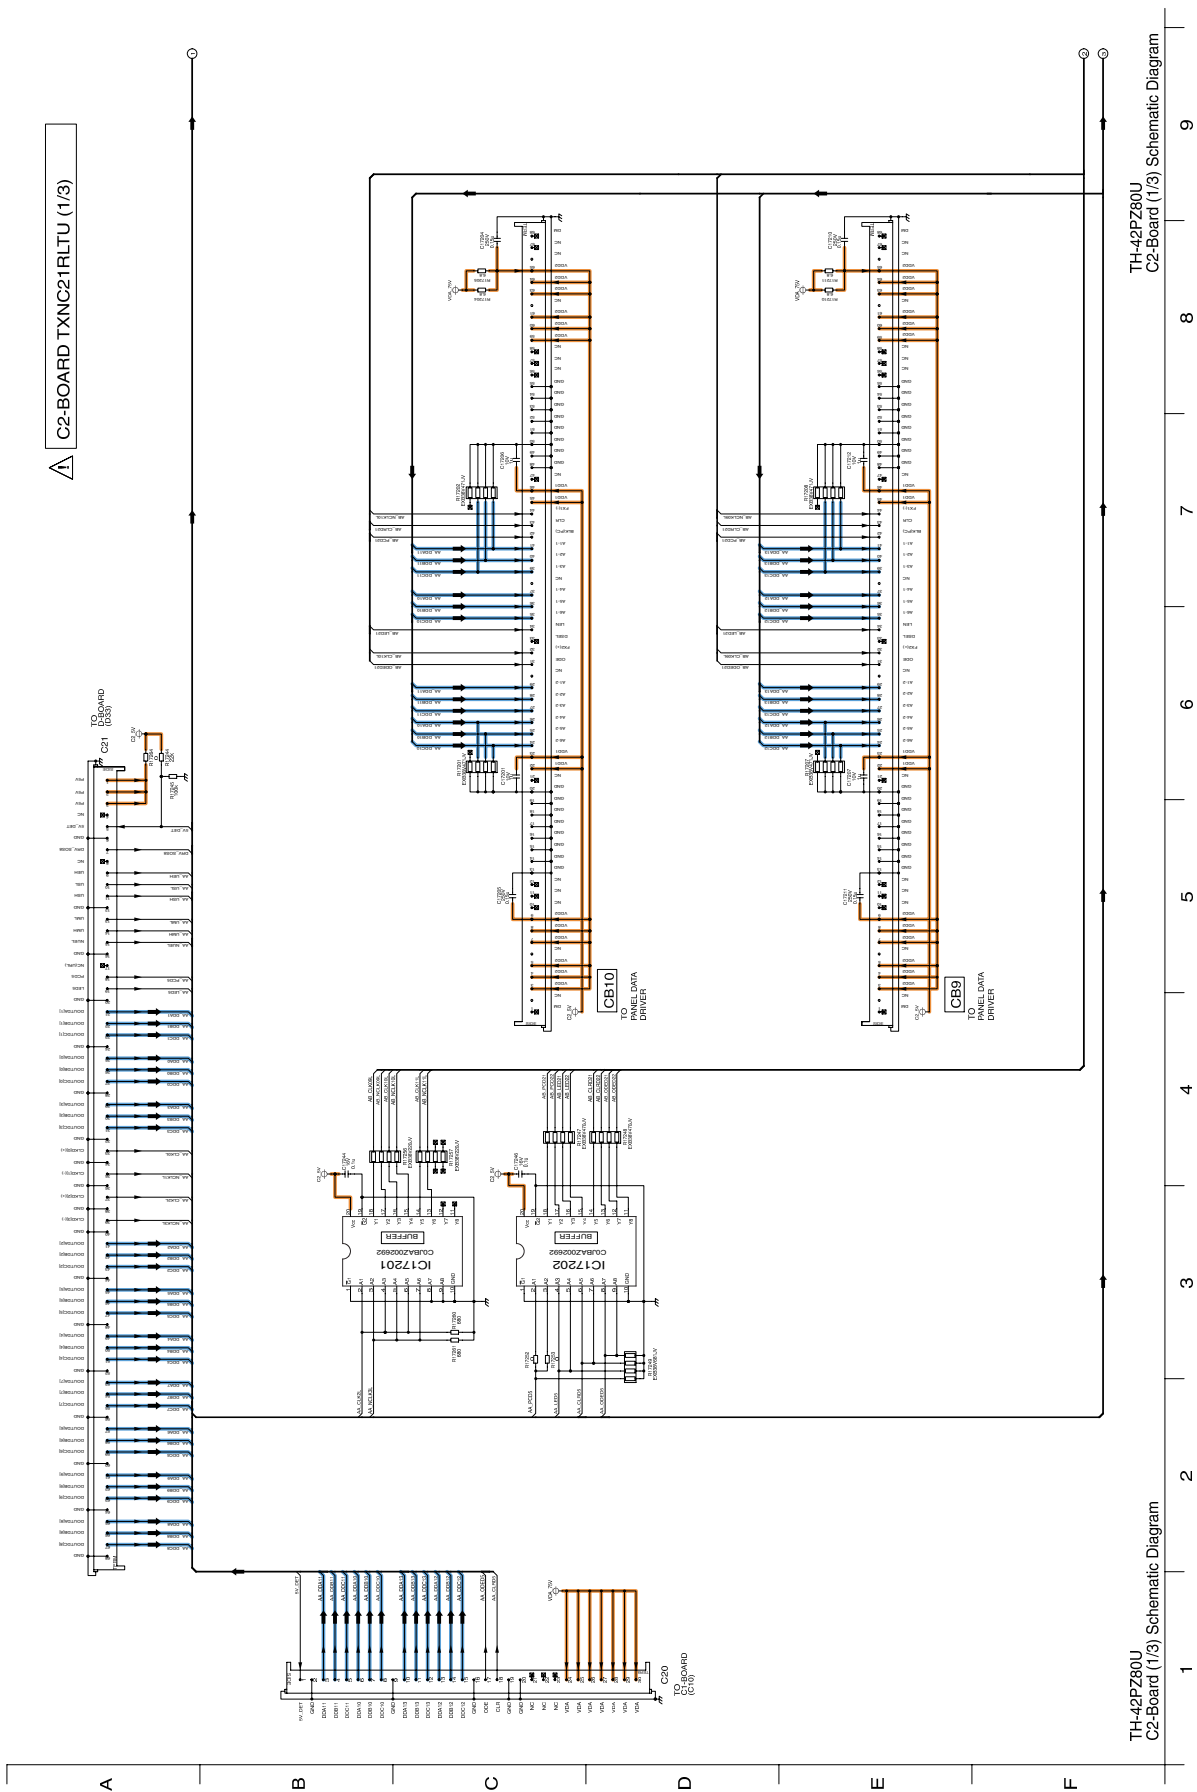


11.29. C2-Board (2/3) Schematic Diagram

⚠ C2-BOARD TXNC21RLTU (2/3)

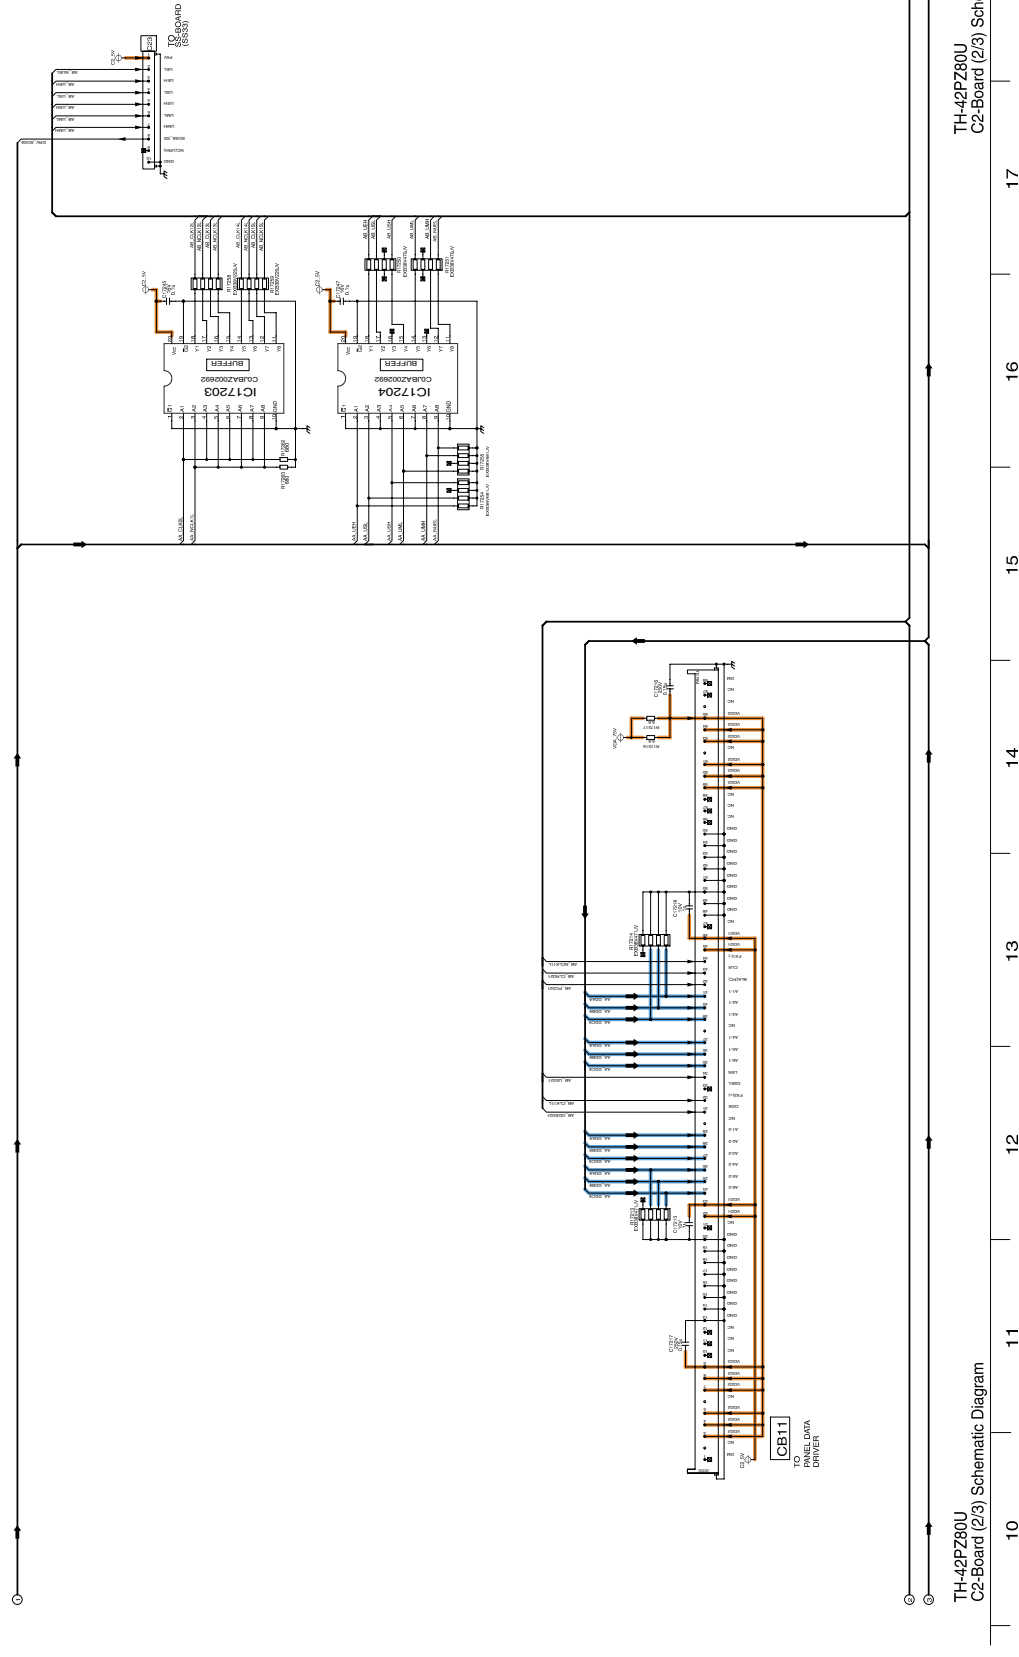


11.30. C2-Board (3/3) Schematic Diagram


⚠ C2-BOARD TXNC21RLTU (3/3)

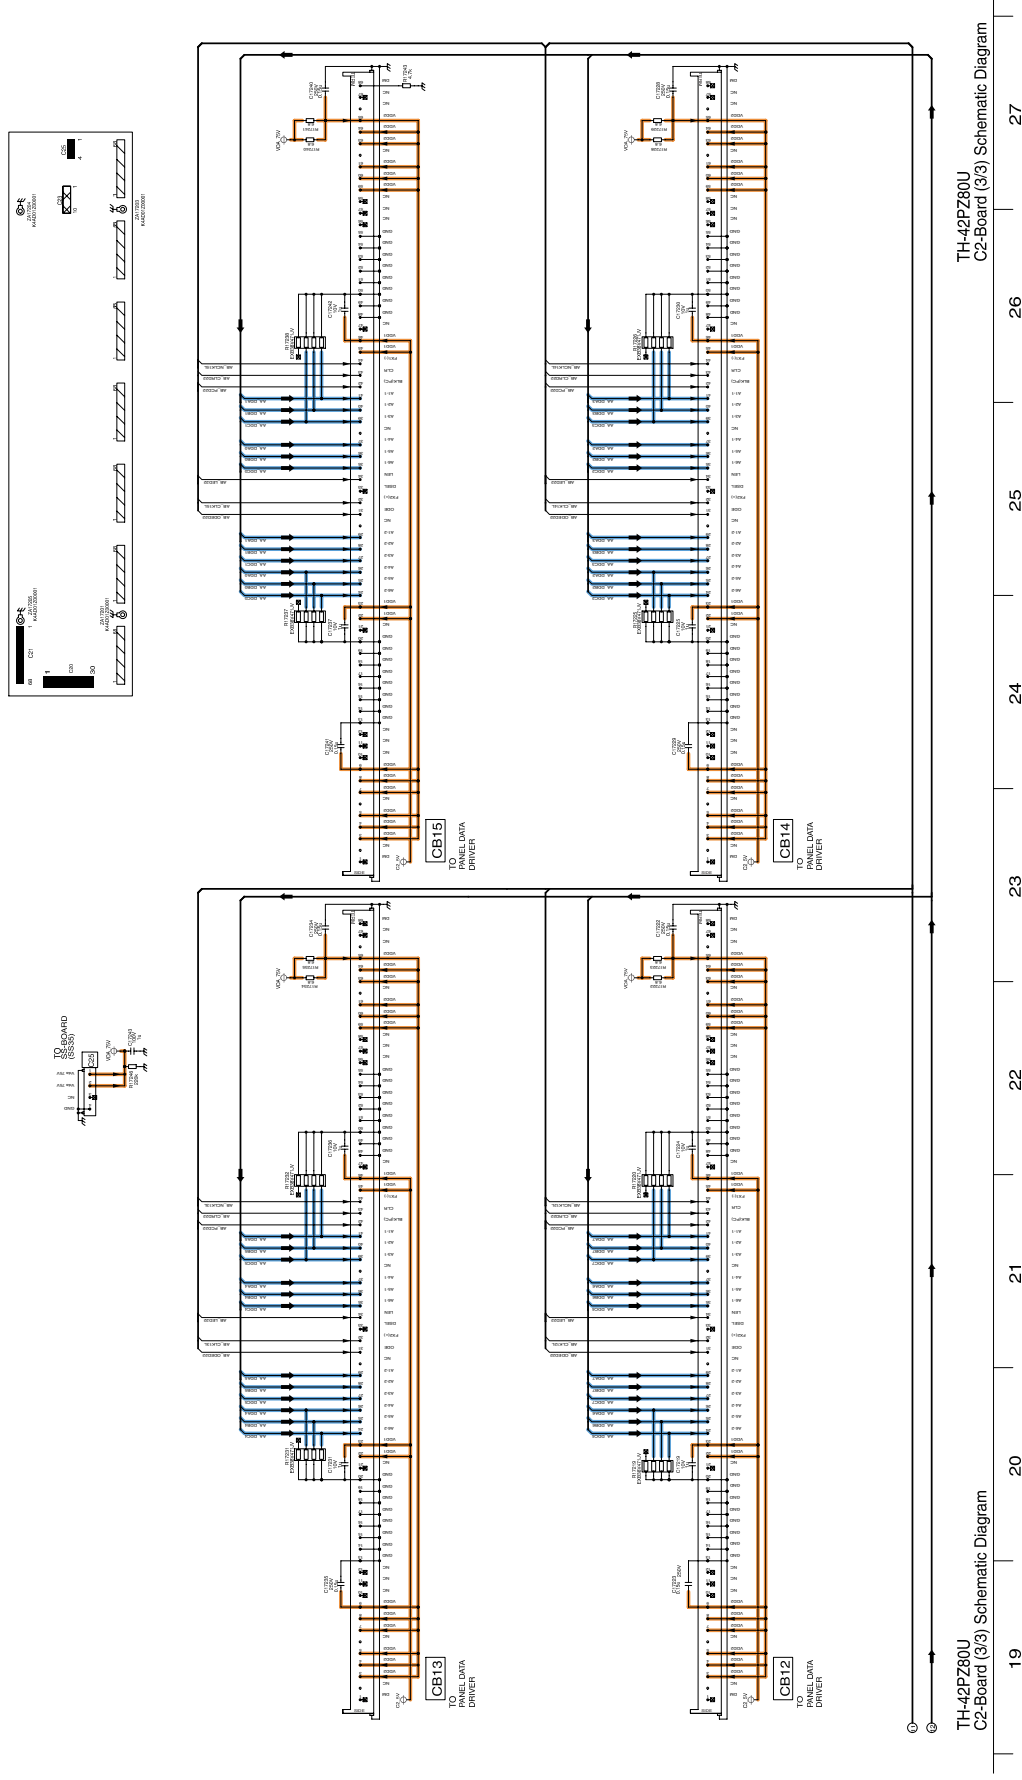

11.31. SC-Board (1/3) Schematic Diagram

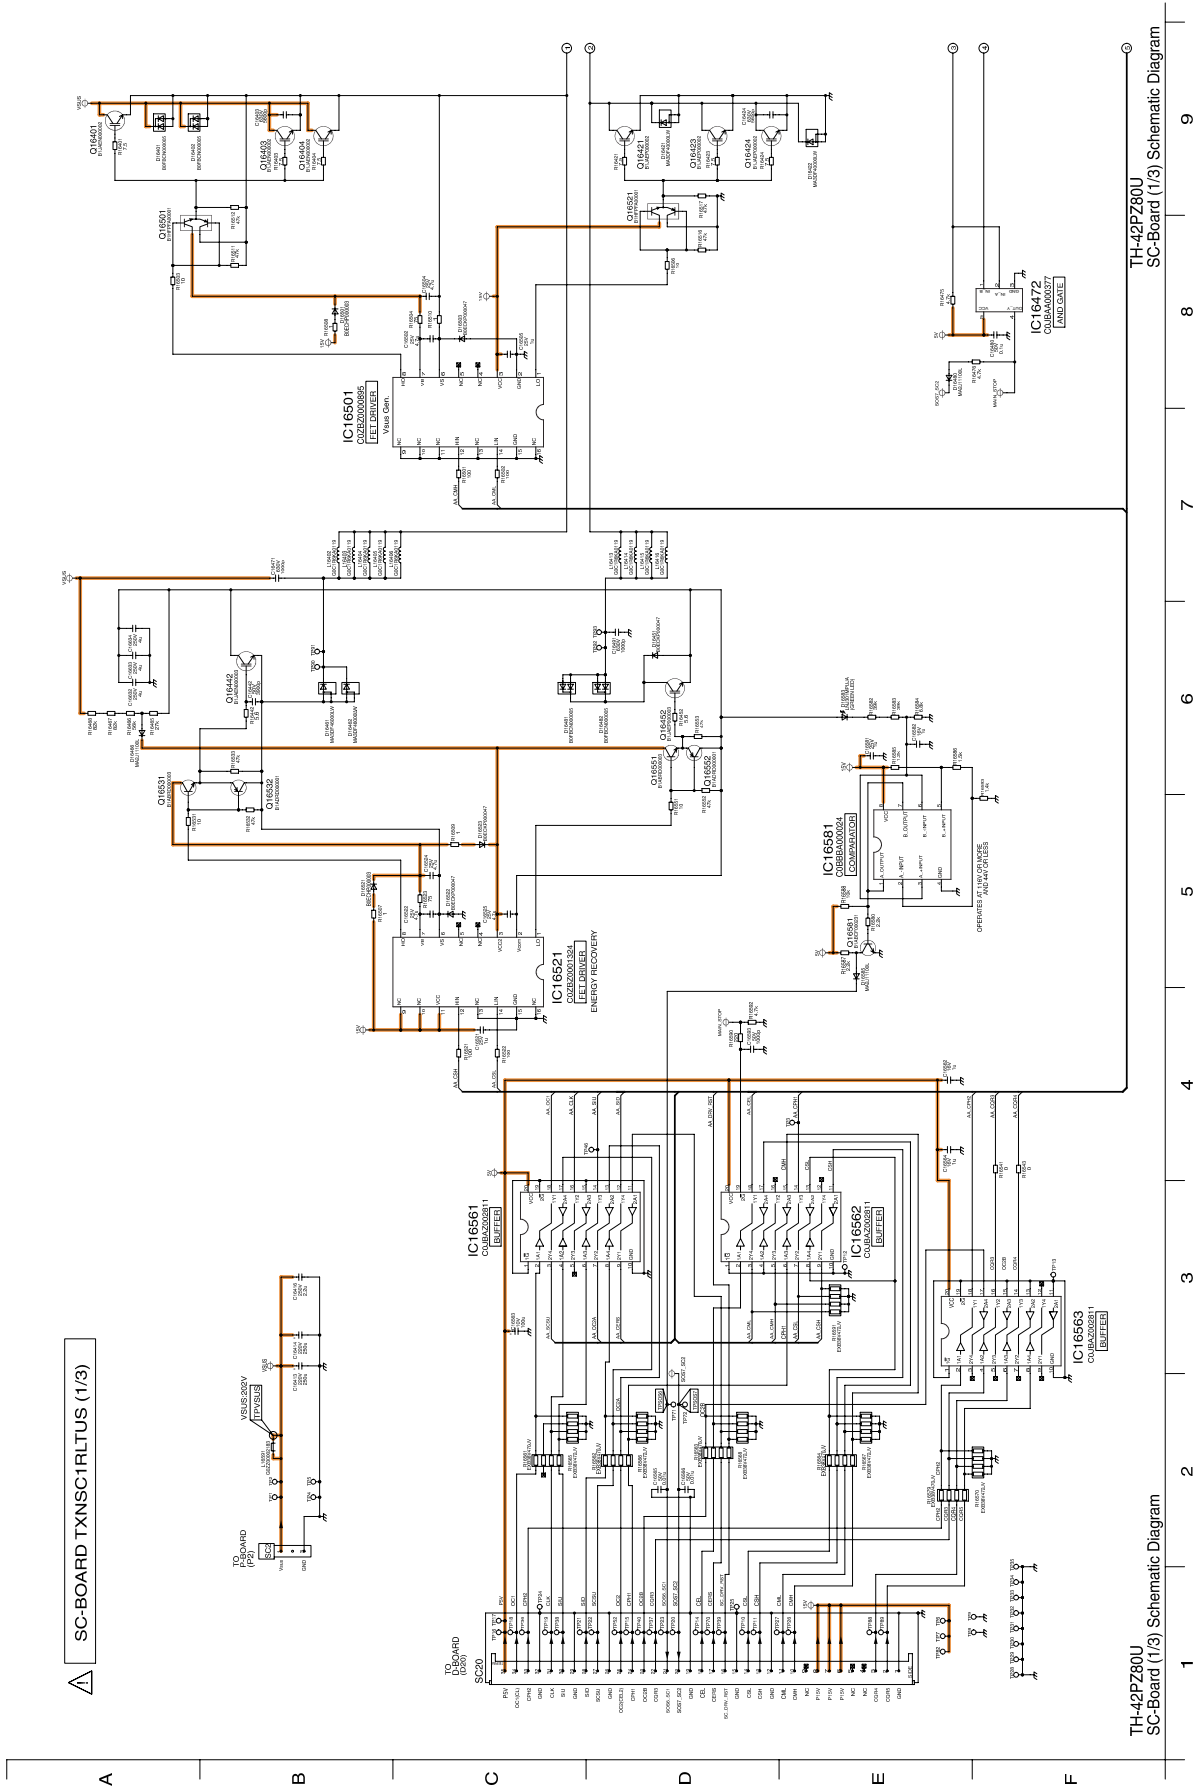


11.33. SC-Board (3/3) Schematic Diagram

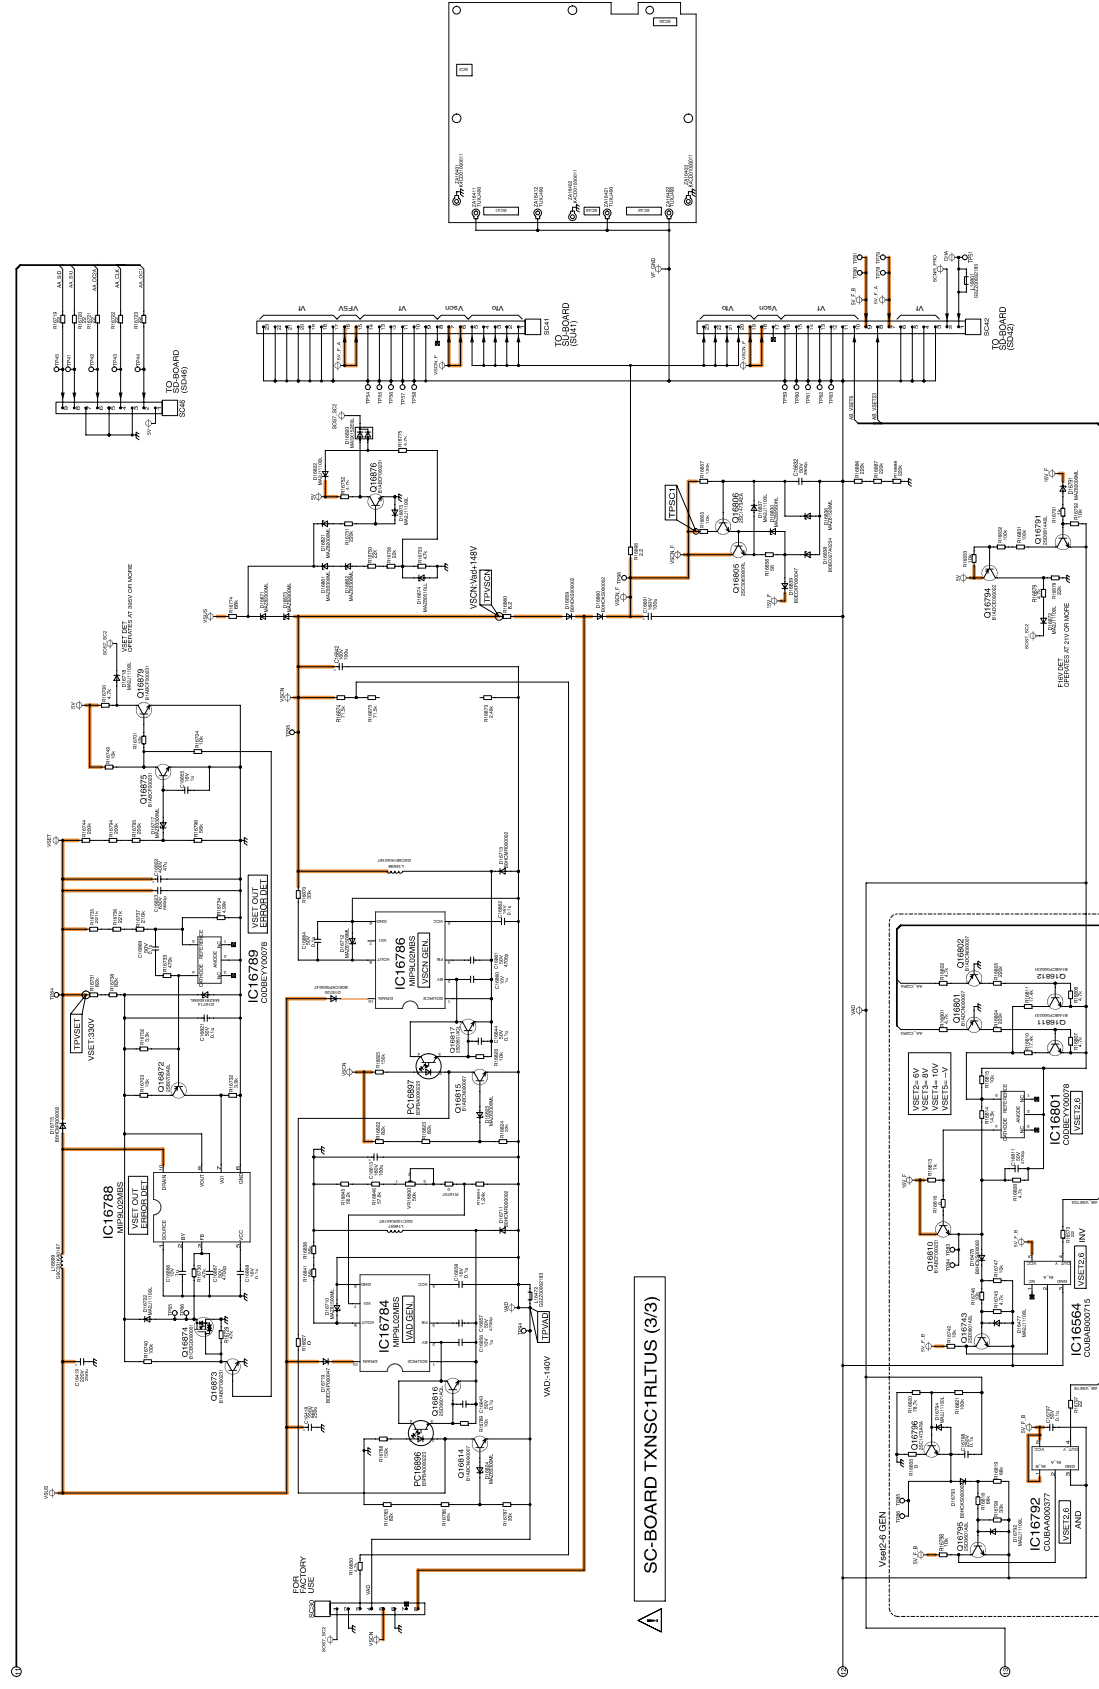


④ TH-42PZ80U
SC-Board (3/3) Schematic Diagram

11.34. SU-Board (1/2) Schematic Diagram

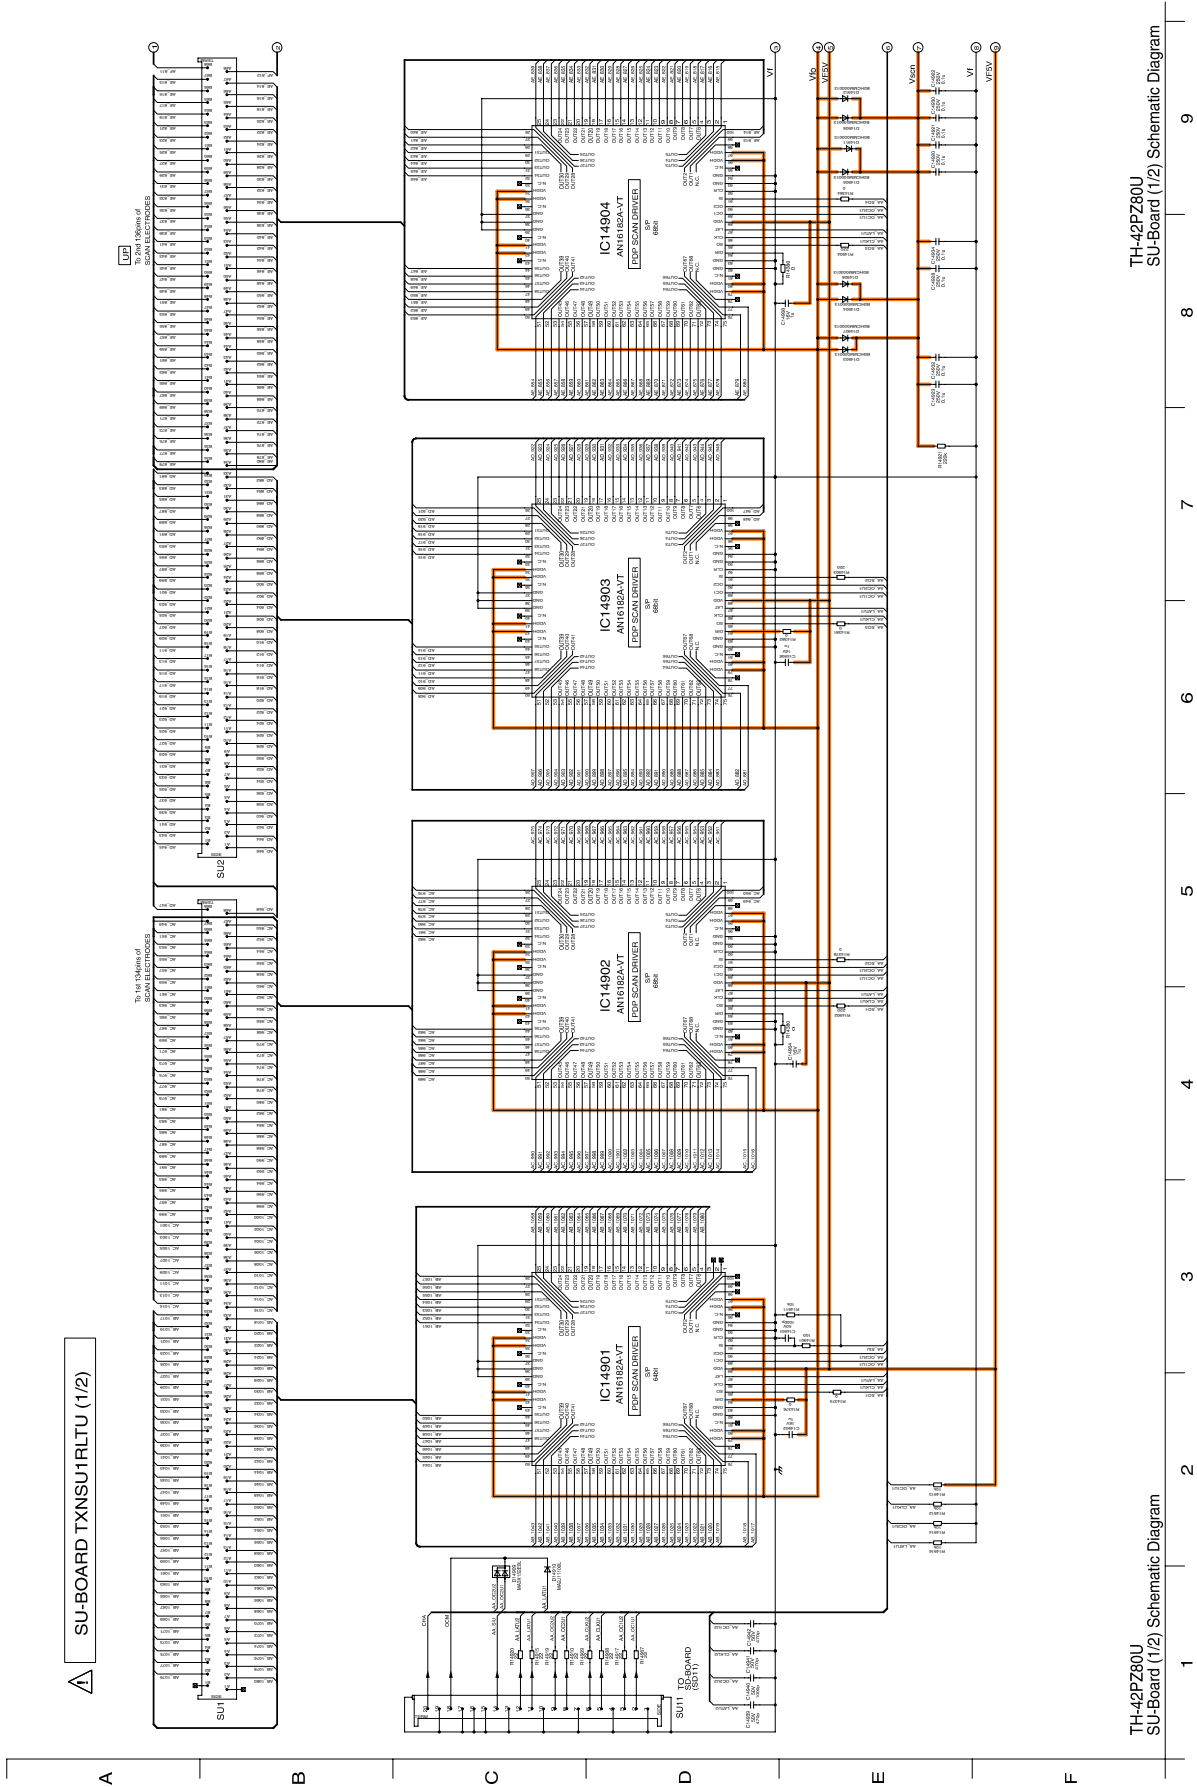


11.35. SU-Board (2/2) Schematic Diagram

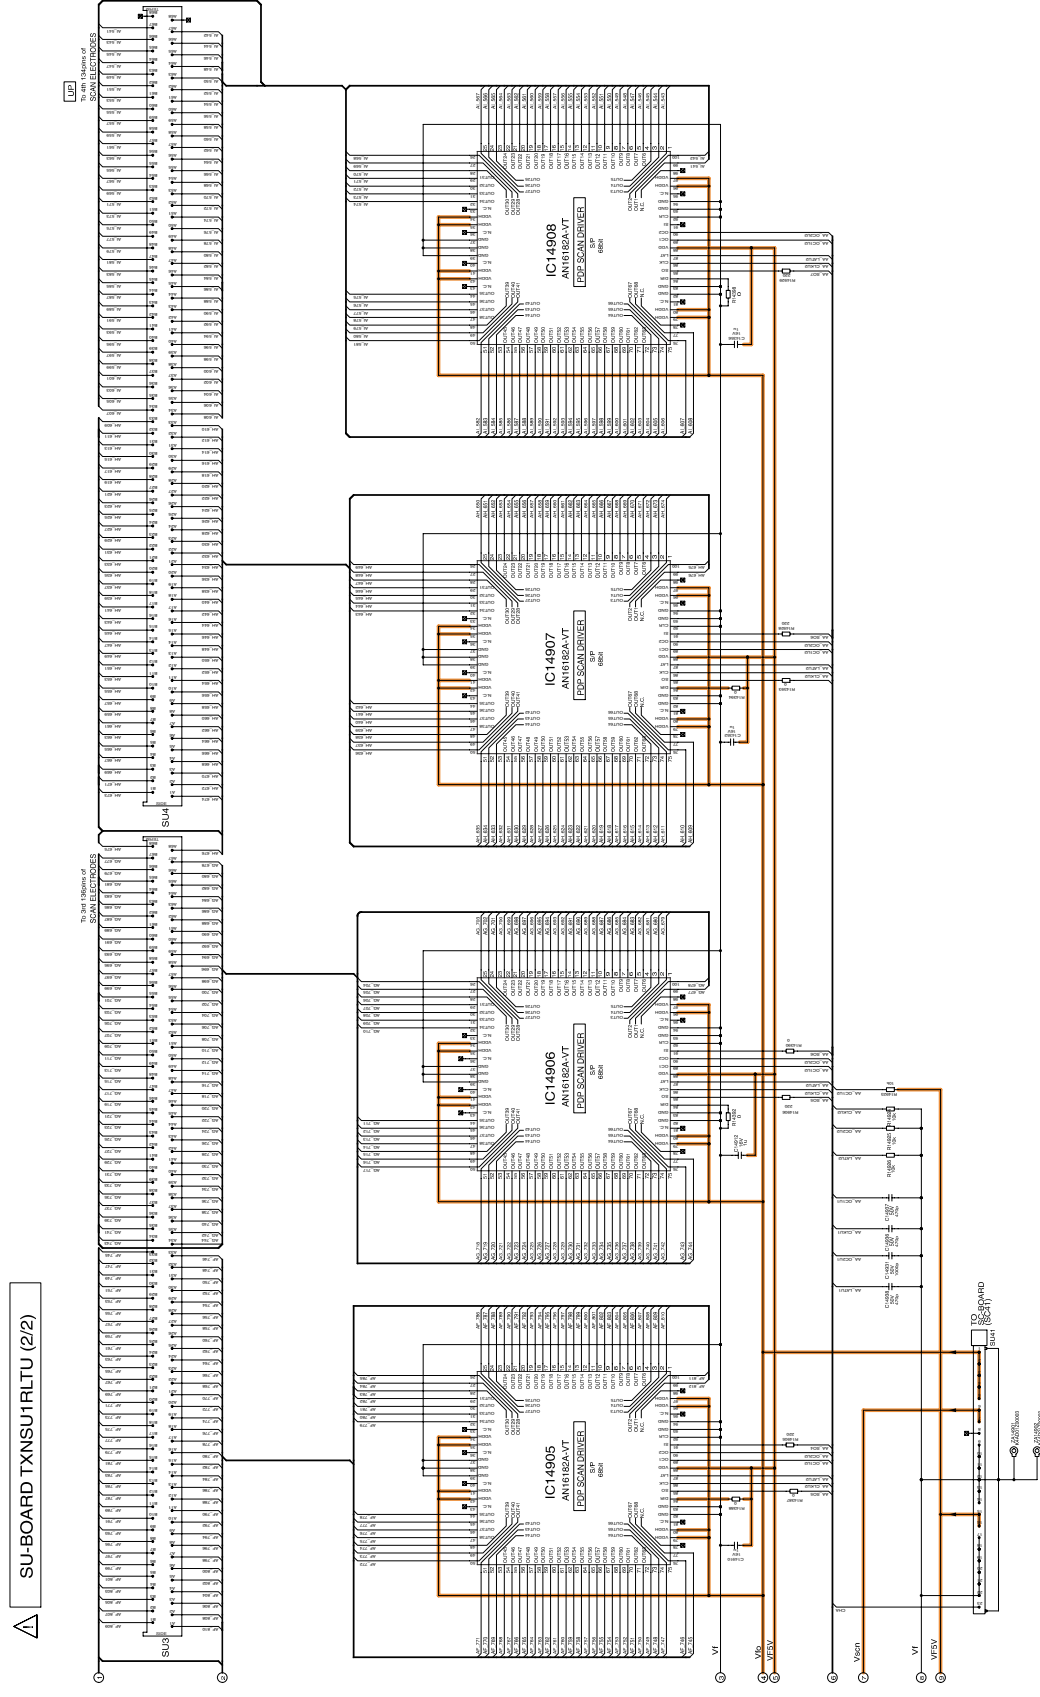


TH-42PZ80U
SU-Board (2/2) Schematic Diagram

11.36. SD-Board (1/3) Schematic Diagram

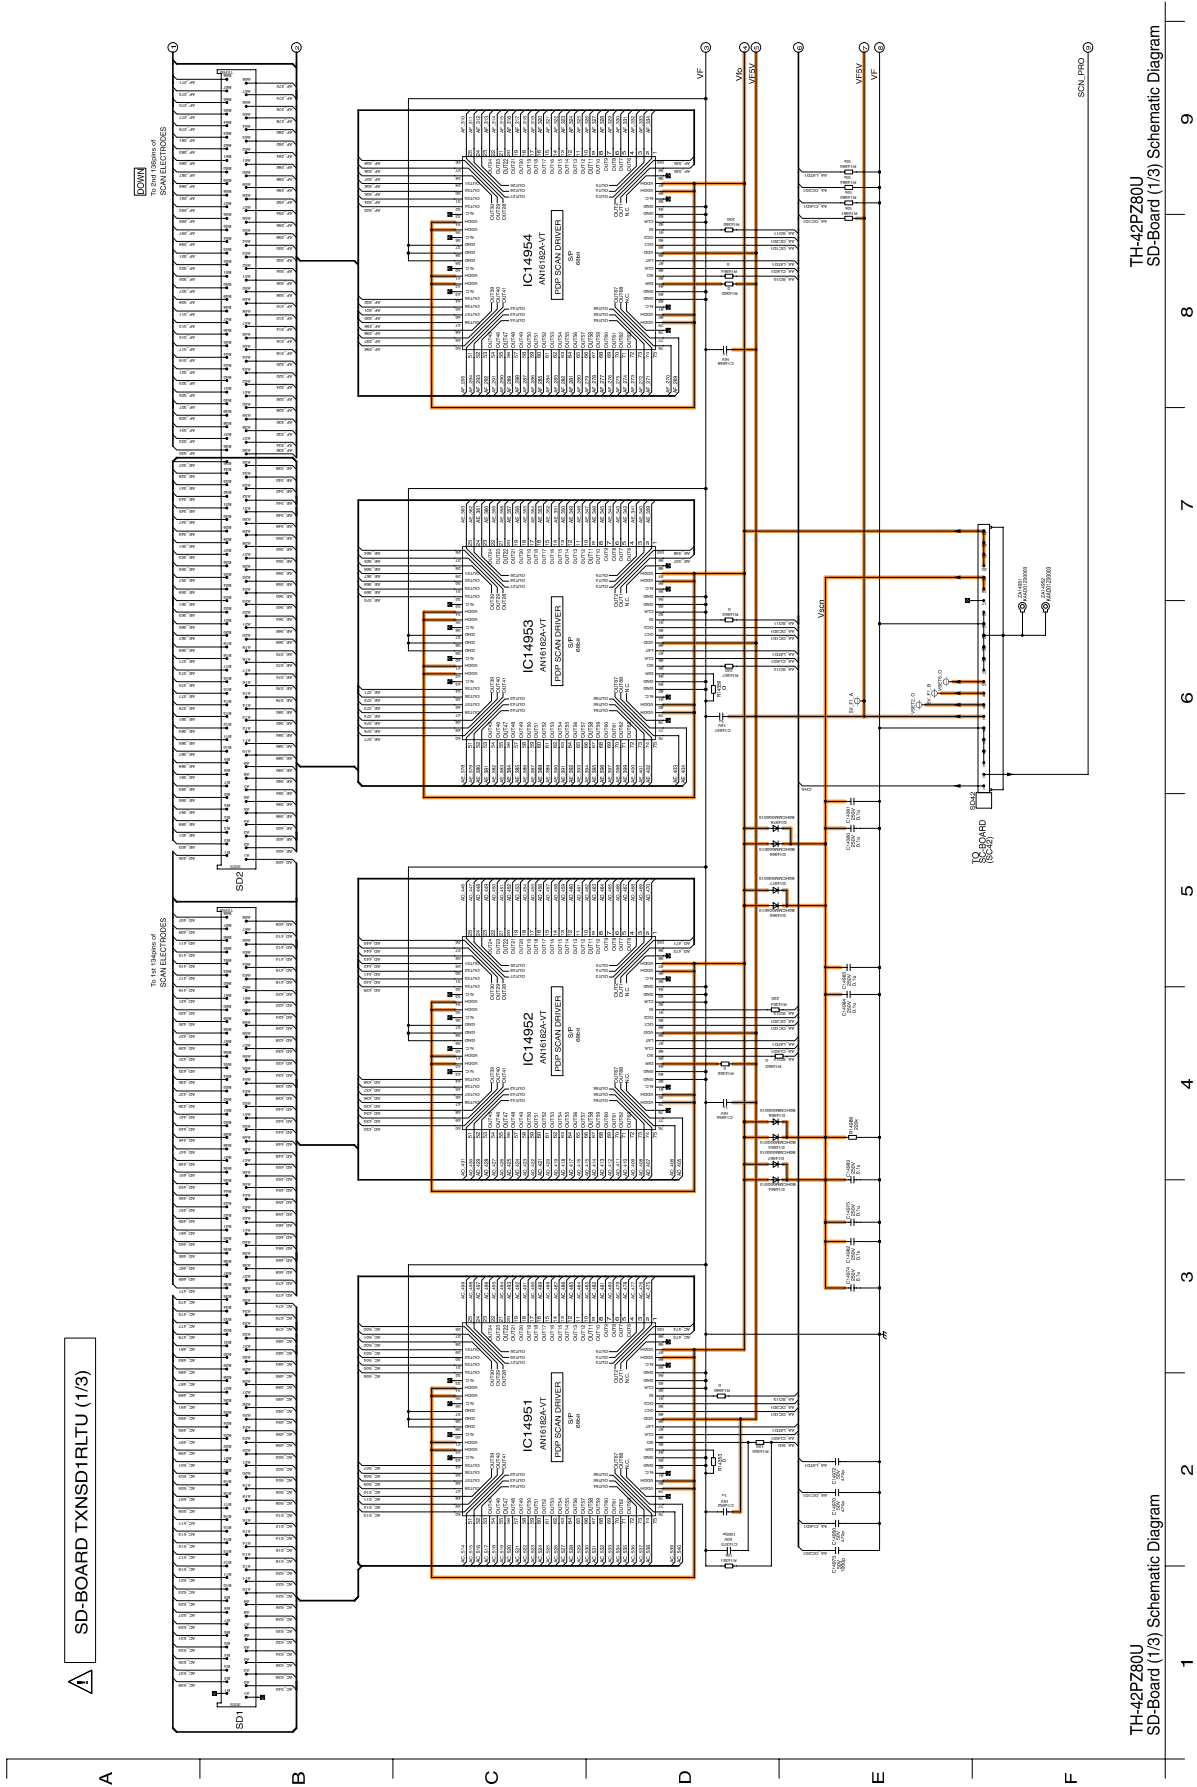


11.37. SD-Board (2/3) Schematic Diagram

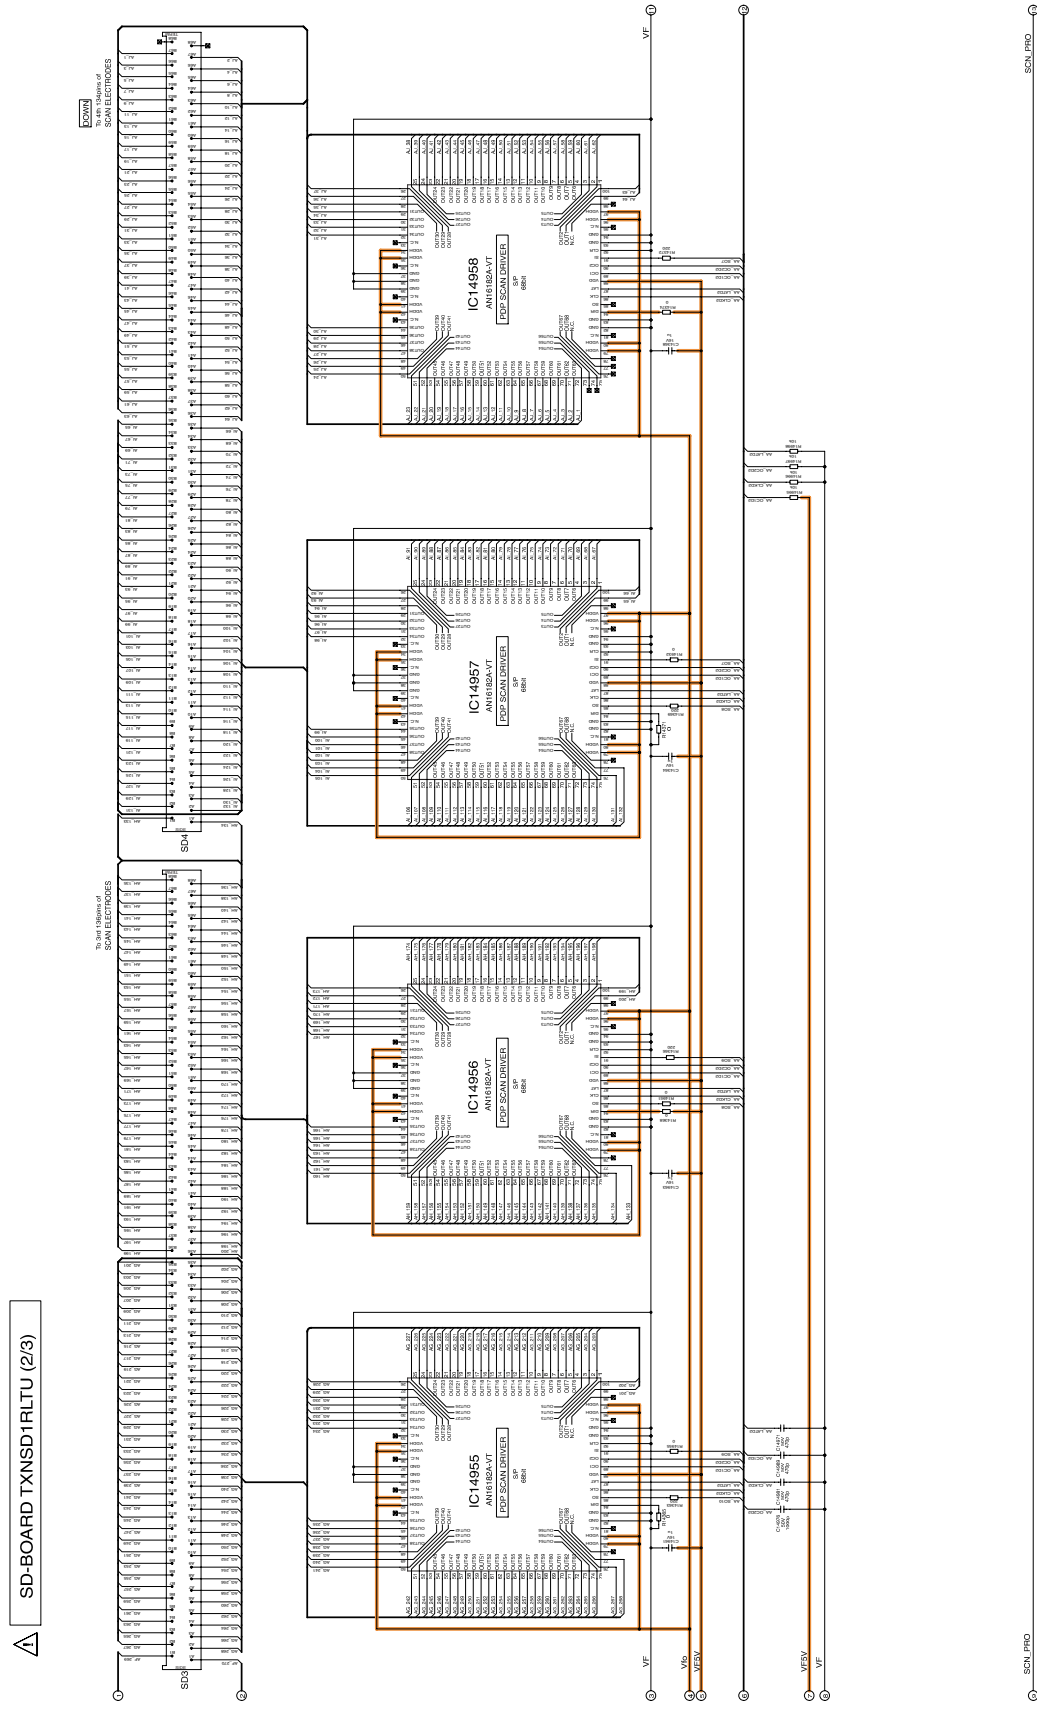


TH-42PZ80U
SD-Board (2/3) Schematic Diagram

11.38. SD-Board (3/3) Schematic Diagram

SD-BOARD TXNSD1RLTU (3/3)

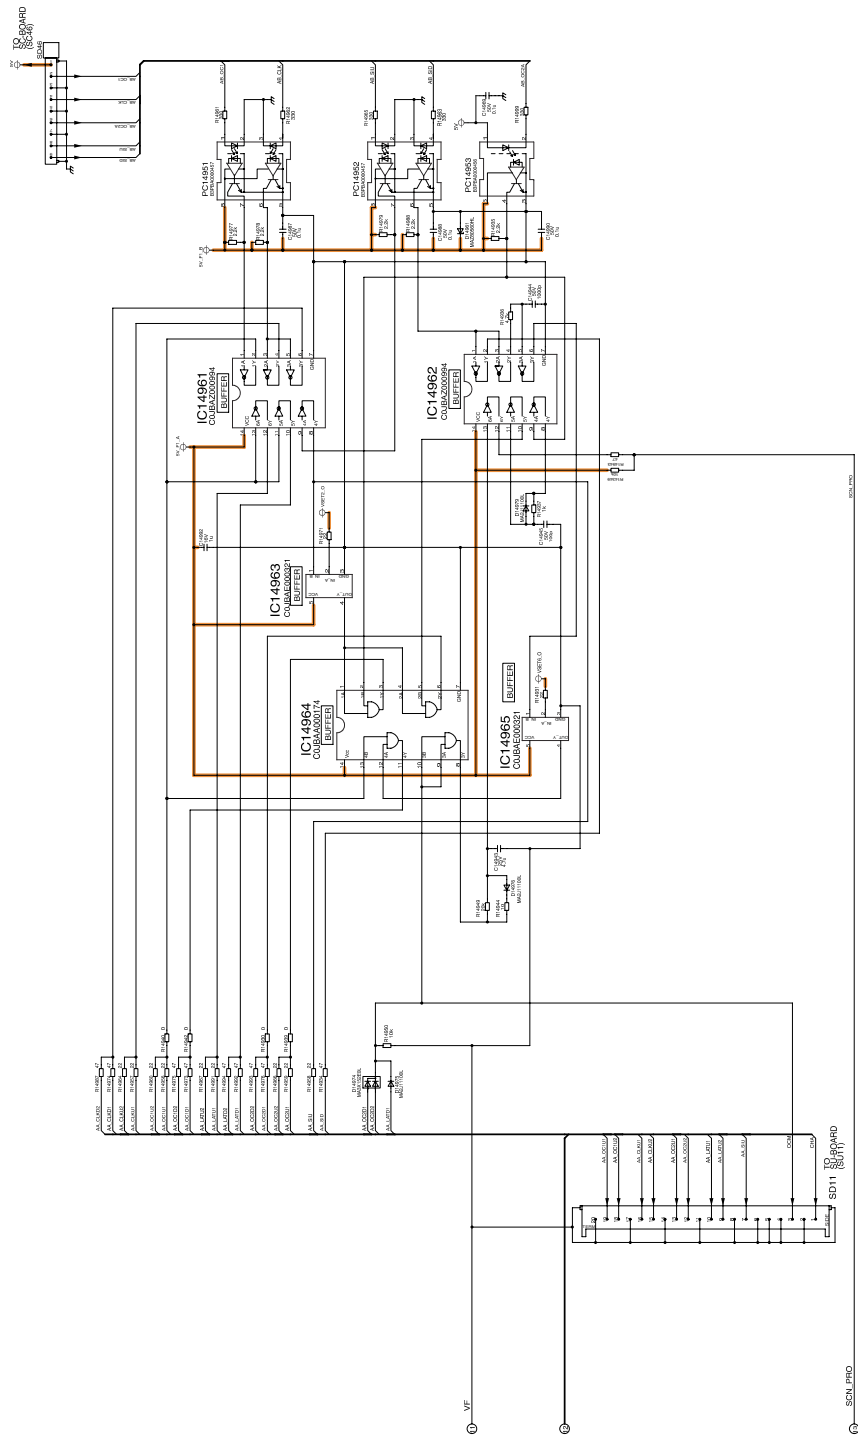

11.39. SS-Board (1/2) Schematic Diagram

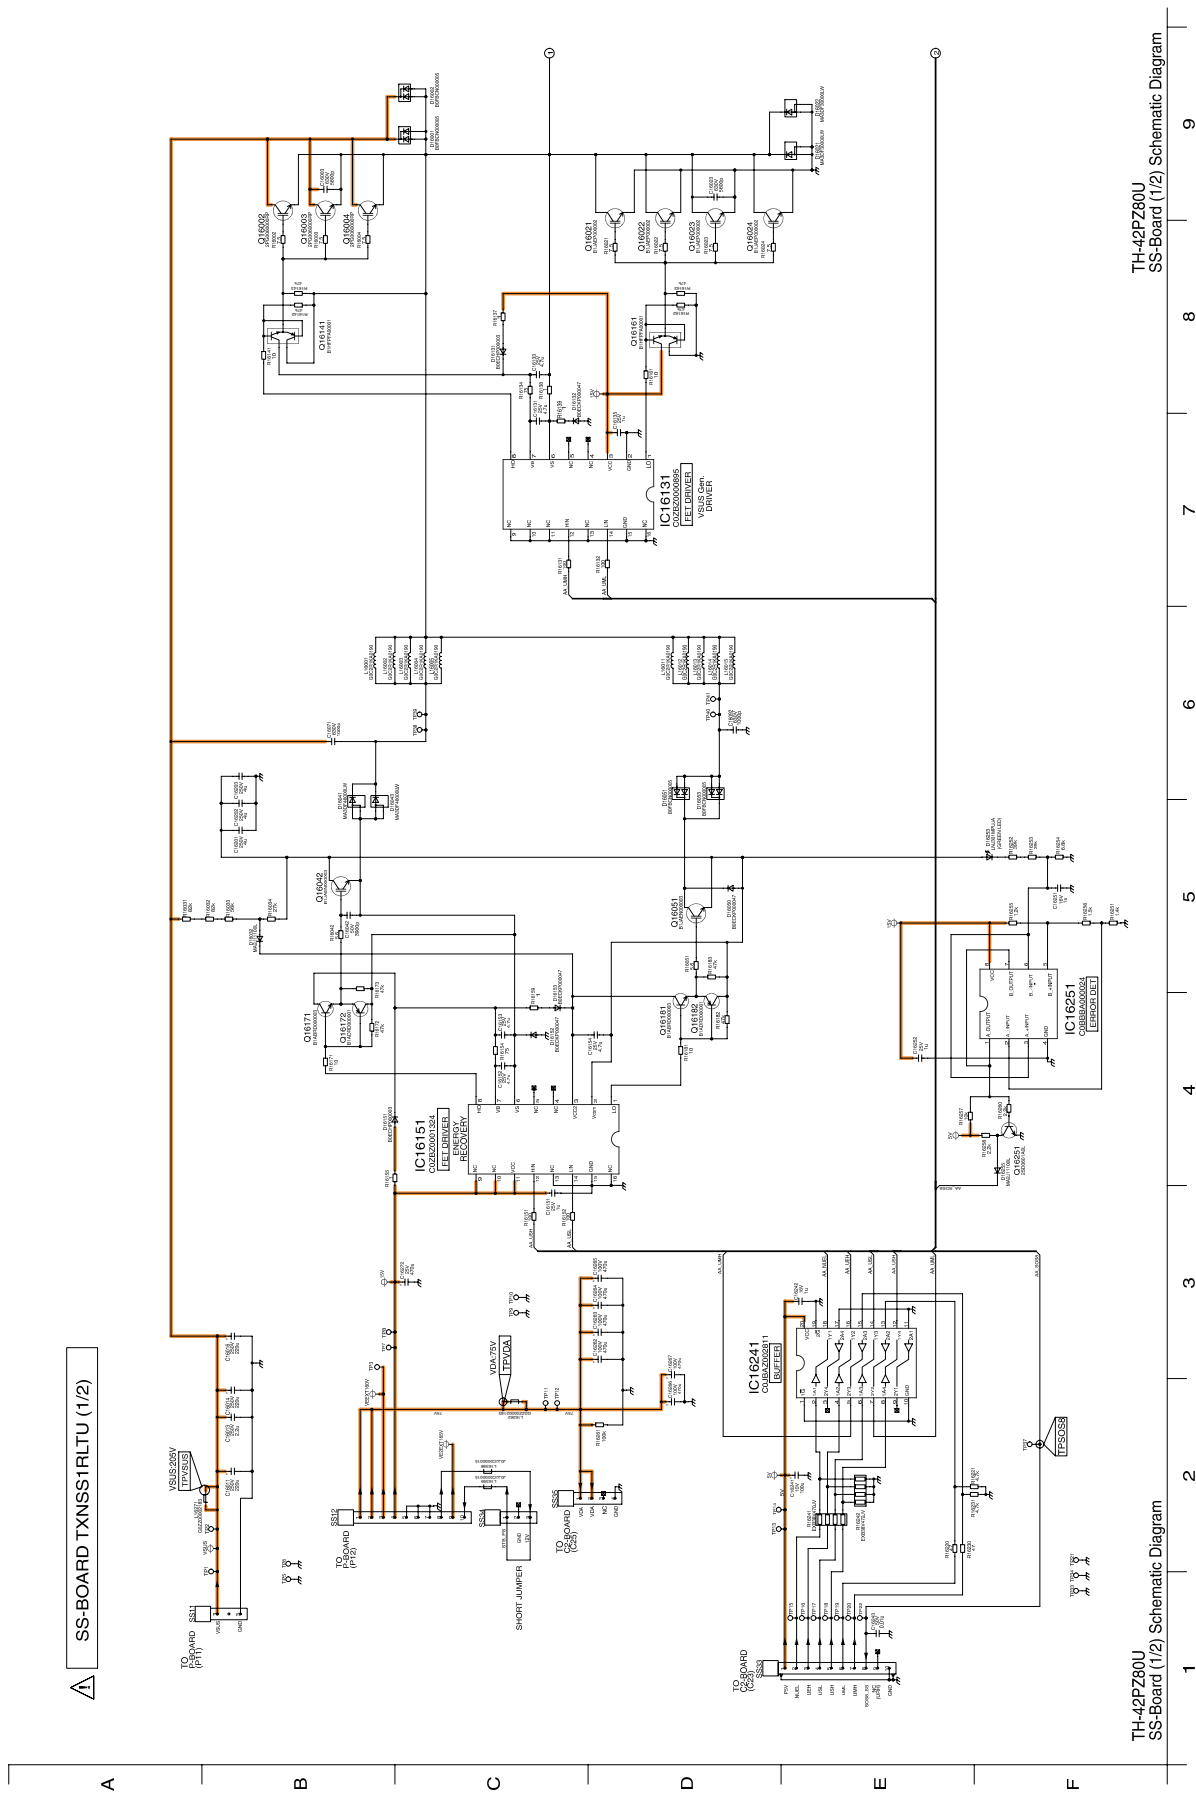


SS-BOARD TXN1RLTU (2/2)



12 Printed Circuit Board


12.1. P-Board

P-BOARD (FOIL SIDE)
ETX2MM702MFN

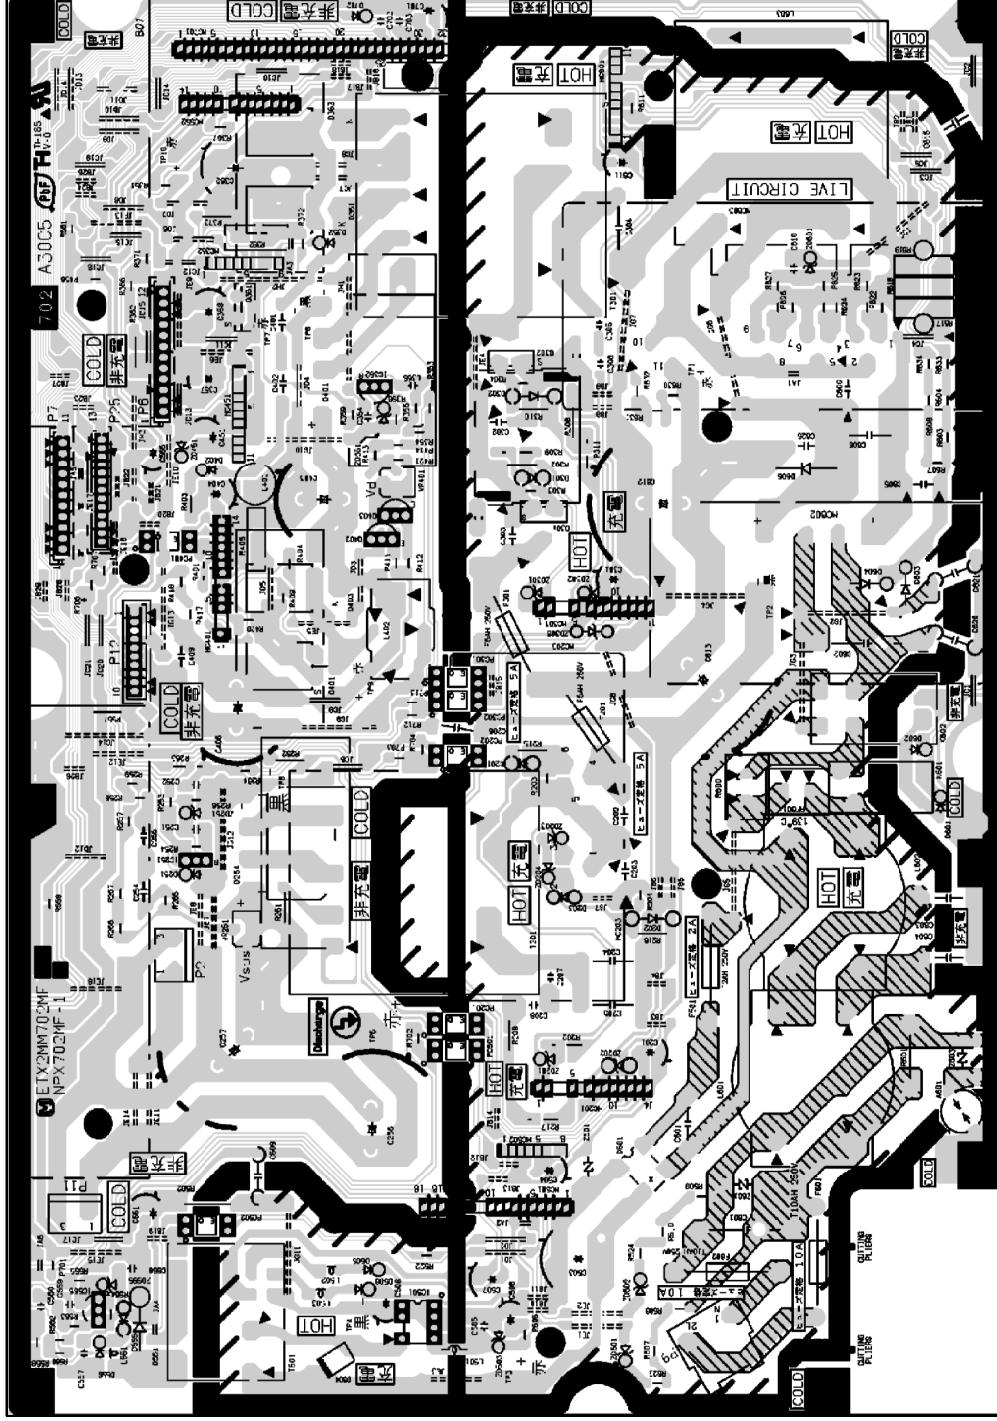

TH-42PZ80U
P-BOARD ETX2MM702MFN

TH-42PZ80U
P-BOARD ETX2MM702MFN

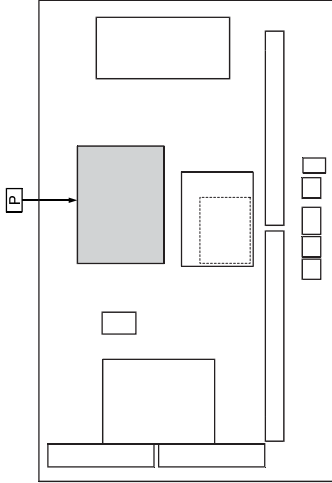

Parts Location


P-BOARD (FOIL SIDE)			
IC	TRANSISTOR	VOLUME	
IC251	D-5	VR251	D-5
IC352	G-4	VR401	F-4
IC501	B-4		
IC555	B-6		
MODULE			
MC201	C-3		
MC203	E-3		
MC301	F-3		
MC352	G-5		
MC401	E-5		
MC451	G-5		
MC501	B-3		
MC502	C-3		
MC552	H-5		
MC601	H-3		
MC602	F-2		
MC603	H-2		
MC701	I-5		

TH-42PZ80U
P-BOARD PARTS LOCATION

Parts Location

P-BOARD (COMPONENT SIDE)			
IC	TRANSISTOR	VOLUME	
IC251	F-5	VR251	F-5
IC352	C-4	VR401	D-4
IC501	H-4		
IC555	H-6		
MODULE			
MC201	G-3		
MC203	E-3		
MC301	F-3		
MC352	C-5		
MC401	D-5		
MC451	H-3		
MC501	G-4		
MC502	E-5		
MC552	B-5		
MC601	H-3		
MC602	D-2		
MC603	C-2		
MC701	B-5		

TH-42PZ80U
P-BOARD PARTS LOCATION

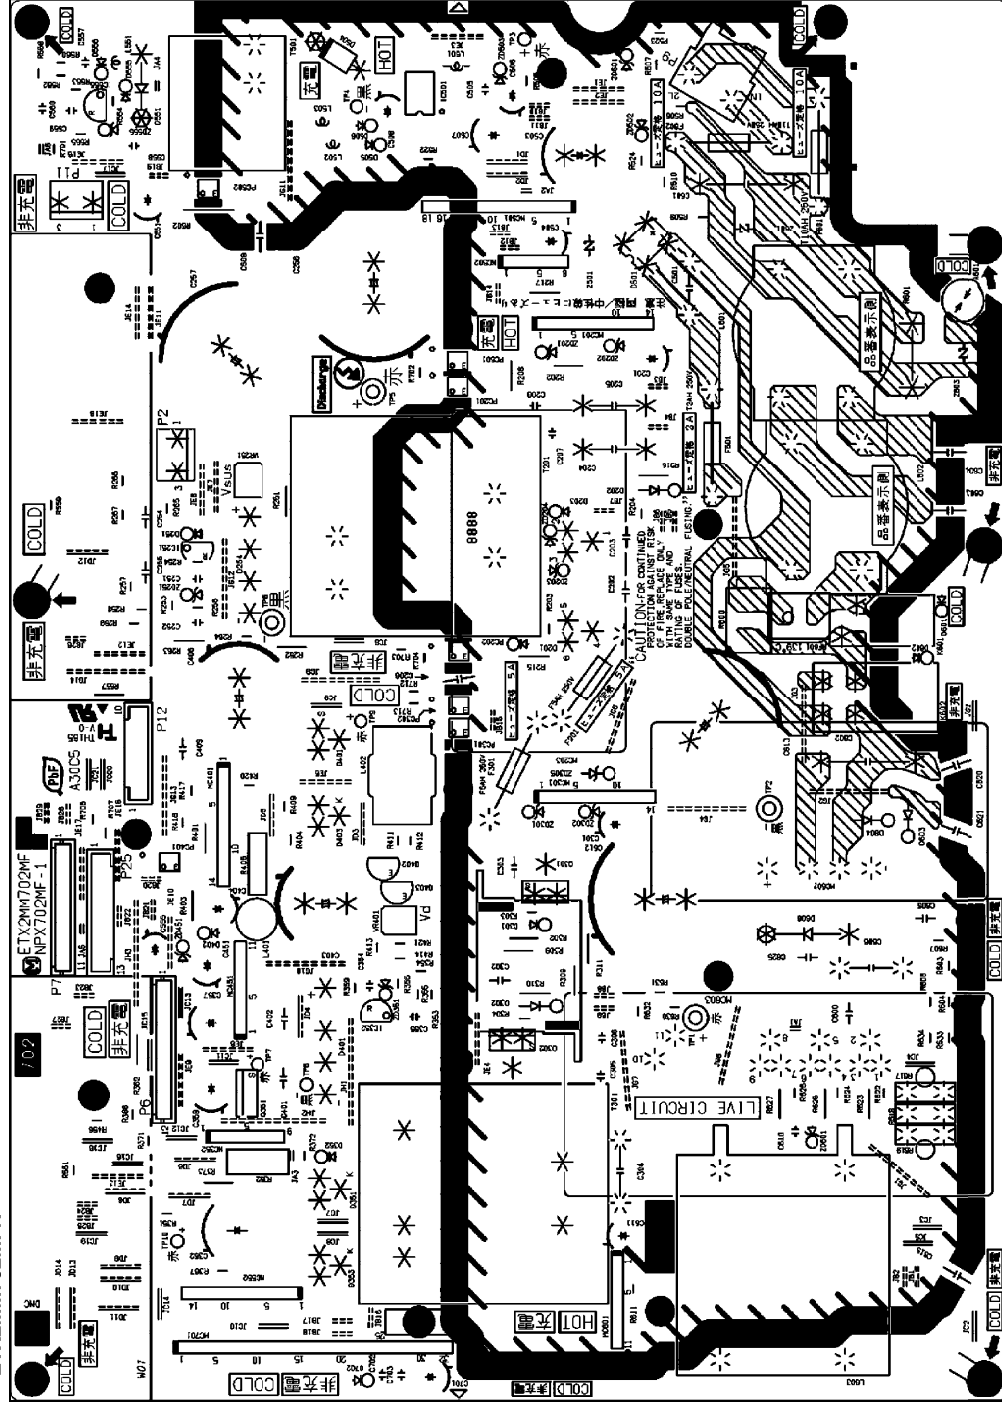

TH-42PZ80U
P-BOARD ETX2MM702MFN

TH-42PZ80U
P-BOARD ETX2MM702MFN

G-BOARD (FOIL SIDE)
TNPA4501S

G-BOARD (COMPONENT SIDE)
TNPA4501S

GH-BOARD (FOIL SIDE)
TNPA4603ABS


GH-BOARD (COMPONENT SIDE)
TNPA4603ABS

GS-BOARD (FOIL SIDE)
TNPA4139ADS


GS-BOARD (COMPONENT SIDE)
TNPA4139ADS


Figure 1 is an assembly drawing for the TH-42PZ80U, showing the layout of the G-board (foiled side), G-board (component side), GH-board (foiled side), and GH-board (component side). The drawing includes various components and their part numbers, such as resistors (R100, R101, R102, R103, R104, R105, R106, R107, R108, R109, R110, R111, R112, R113, R114, R115, R116, R117, R118, R119, R120, R121, R122, R123, R124, R125, R126, R127, R128, R129, R130, R131, R132, R133, R134, R135, R136, R137, R138, R139, R140, R141, R142, R143, R144, R145, R146, R147, R148, R149, R150, R151, R152, R153, R154, R155, R156, R157, R158, R159, R160, R161, R162, R163, R164, R165, R166, R167, R168, R169, R170, R171, R172, R173, R174, R175, R176, R177, R178, R179, R180, R181, R182, R183, R184, R185, R186, R187, R188, R189, R190, R191, R192, R193, R194, R195, R196, R197, R198, R199, R200, R201, R202, R203, R204, R205, R206, R207, R208, R209, R210, R211, R212, R213, R214, R215, R216, R217, R218, R219, R220, R221, R222, R223, R224, R225, R226, R227, R228, R229, R230, R231, R232, R233, R234, R235, R236, R237, R238, R239, R240, R241, R242, R243, R244, R245, R246, R247, R248, R249, R250, R251, R252, R253, R254, R255, R256, R257, R258, R259, R260, R261, R262, R263, R264, R265, R266, R267, R268, R269, R270, R271, R272, R273, R274, R275, R276, R277, R278, R279, R280, R281, R282, R283, R284, R285, R286, R287, R288, R289, R290, R291, R292, R293, R294, R295, R296, R297, R298, R299, R300, R301, R302, R303, R304, R305, R306, R307, R308, R309, R310, R311, R312, R313, R314, R315, R316, R317, R318, R319, R320, R321, R322, R323, R324, R325, R326, R327, R328, R329, R330, R331, R332, R333, R334, R335, R336, R337, R338, R339, R340, R341, R342, R343, R344, R345, R346, R347, R348, R349, R350, R351, R352, R353, R354, R355, R356, R357, R358, R359, R360, R361, R362, R363, R364, R365, R366, R367, R368, R369, R370, R371, R372, R373, R374, R375, R376, R377, R378, R379, R380, R381, R382, R383, R384, R385, R386, R387, R388, R389, R390, R391, R392, R393, R394, R395, R396, R397, R398, R399, R400, R401, R402, R403, R404, R405, R406, R407, R408, R409, R410, R411, R412, R413, R414, R415, R416, R417, R418, R419, R420, R421, R422, R423, R424, R425, R426, R427, R428, R429, R430, R431, R432, R433, R434, R435, R436, R437, R438, R439, R440, R441, R442, R443, R444, R445, R446, R447, R448, R449, R450, R451, R452, R453, R454, R455, R456, R457, R458, R459, R460, R461, R462, R463, R464, R465, R466, R467, R468, R469, R470, R471, R472, R473, R474, R475, R476, R477, R478, R479, R480, R481, R482, R483, R484, R485, R486, R487, R488, R489, R490, R491, R492, R493, R494, R495, R496, R497, R498, R499, R500, R501, R502, R503, R504, R505, R506, R507, R508, R509, R510, R511, R512, R513, R514, R515, R516, R517, R518, R519, R520, R521, R522, R523, R524, R525, R526, R527, R528, R529, R530, R531, R532, R533, R534, R535, R536, R537, R538, R539, R540, R541, R542, R543, R544, R545, R546, R547, R548, R549, R550, R551, R552, R553, R554, R555, R556, R557, R558, R559, R560, R561, R562, R563, R564, R565, R566, R567, R568, R569, R570, R571, R572, R573, R574, R575, R576, R577, R578, R579, R580, R581, R582, R583, R584, R585, R586, R587, R588, R589, R590, R591, R592, R593, R594, R595, R596, R597, R598, R599, R600, R601, R602, R603, R604, R605, R606, R607, R608, R609, R610, R611, R612, R613, R614, R615, R616, R617, R618, R619, R620, R621, R622, R623, R624, R625, R626, R627, R628, R629, R630, R631, R632, R633, R634, R635, R636, R637, R638, R639, R640, R641, R642, R643, R644, R645, R646, R647, R648, R649, R650, R651, R652, R653, R654, R655, R656, R657, R658, R659, R660, R661, R662, R663, R664, R665, R666, R667, R668, R669, R670, R671, R672, R673, R674, R675, R676, R677, R678, R679, R680, R681, R682, R683, R684, R685, R686, R687, R688, R689, R690, R691, R692, R693, R694, R695, R696, R697, R698, R699, R700, R701, R702, R703, R704, R705, R706, R707, R708, R709, R710, R711, R712, R713, R714, R715, R716, R717, R718, R719, R720, R721, R722, R723, R724, R725, R726, R727, R728, R729, R730, R731, R732, R733, R734, R735, R736, R737, R738, R739, R740, R741, R742, R743, R744, R745, R746, R747, R748, R749, R750, R751, R752, R753, R754, R755, R756, R757, R758, R759, R760, R761, R762, R763, R764, R765, R766, R767, R768, R769, R770, R771, R772, R773, R774, R775, R776, R777, R778, R779, R780, R781, R782, R783, R784, R785, R786, R787, R788, R789, R790, R791, R792, R793, R794, R795, R796, R797, R798, R799, R800, R801, R802, R803, R804, R805, R806, R807, R808, R809, R810, R811, R812, R813, R814, R815, R816, R817, R818, R819, R820, R821, R822, R823, R824, R825, R826, R827, R828, R829, R830, R831, R832, R833, R834, R835, R836, R837, R838, R839, R840, R841, R842, R843, R844, R845, R846, R847, R848

12.3. K, PB and S-Board

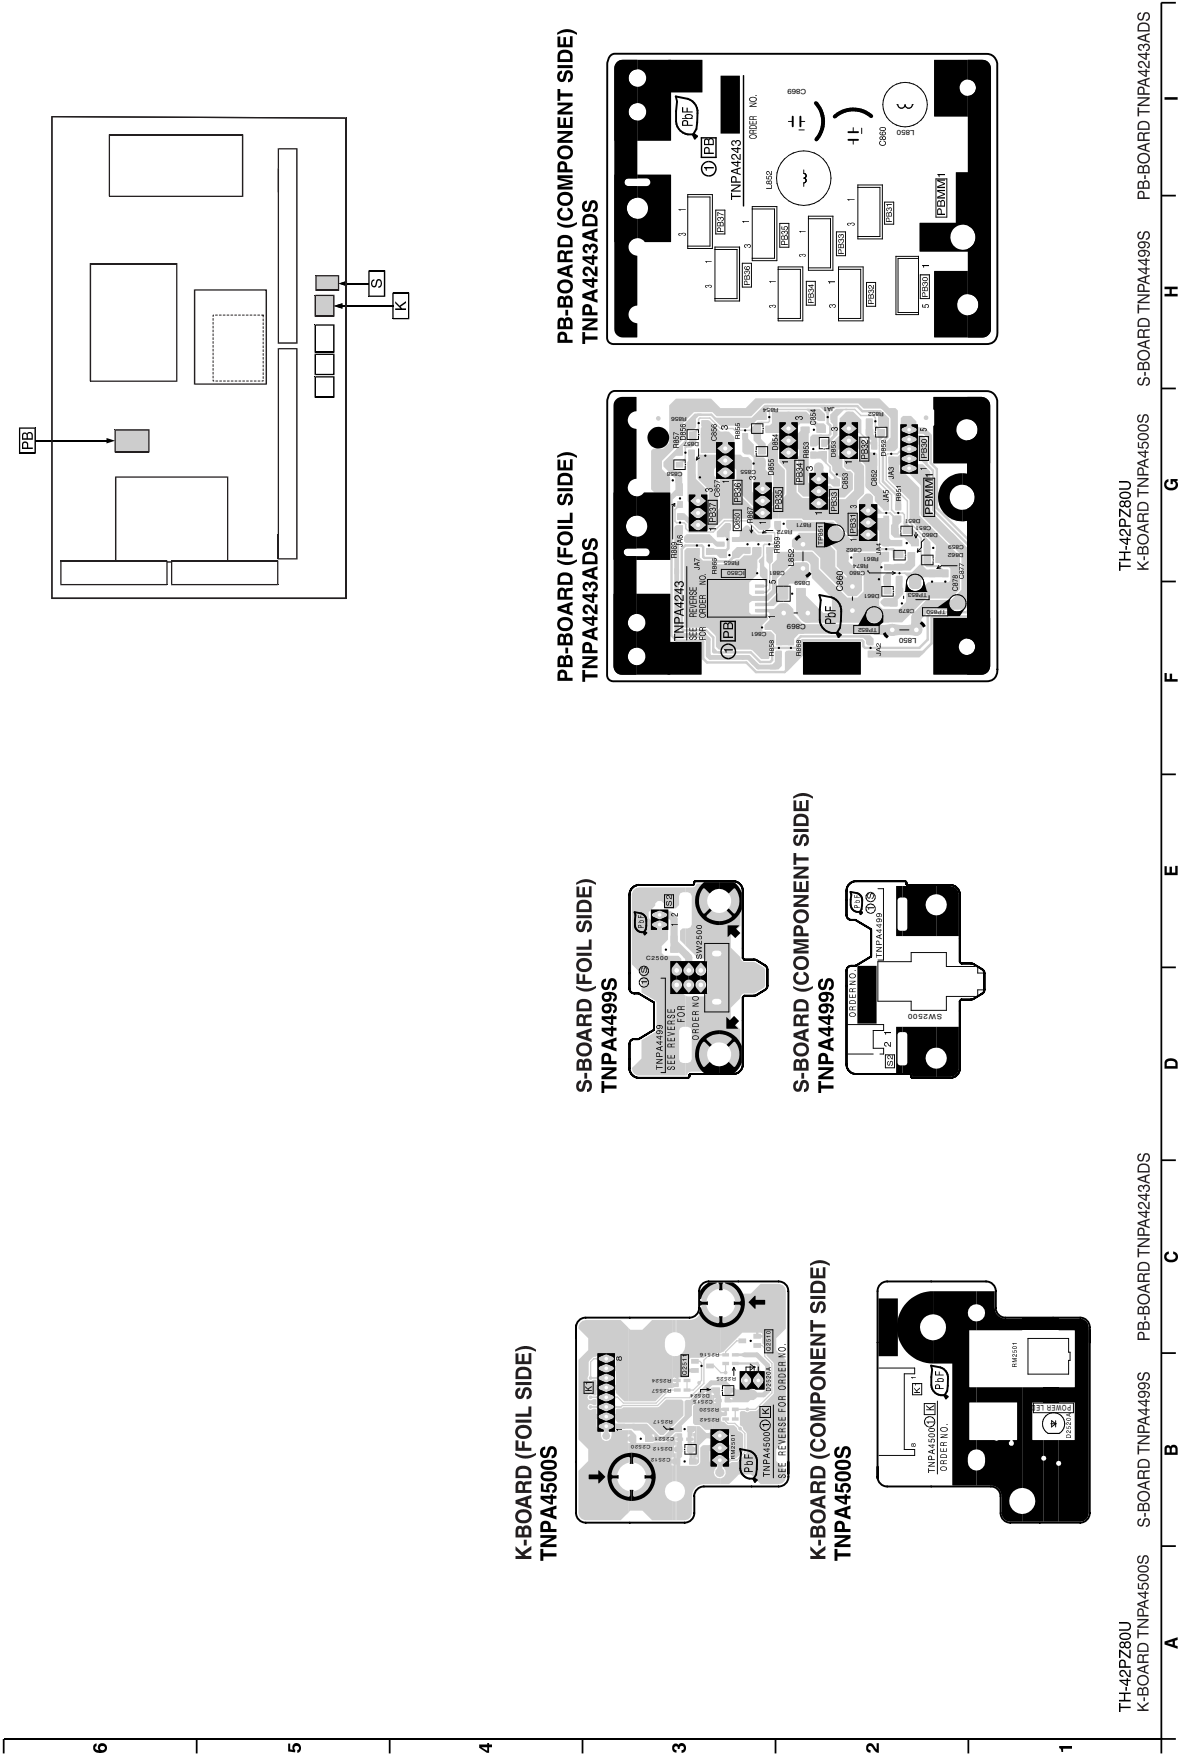

12.4. A-Board

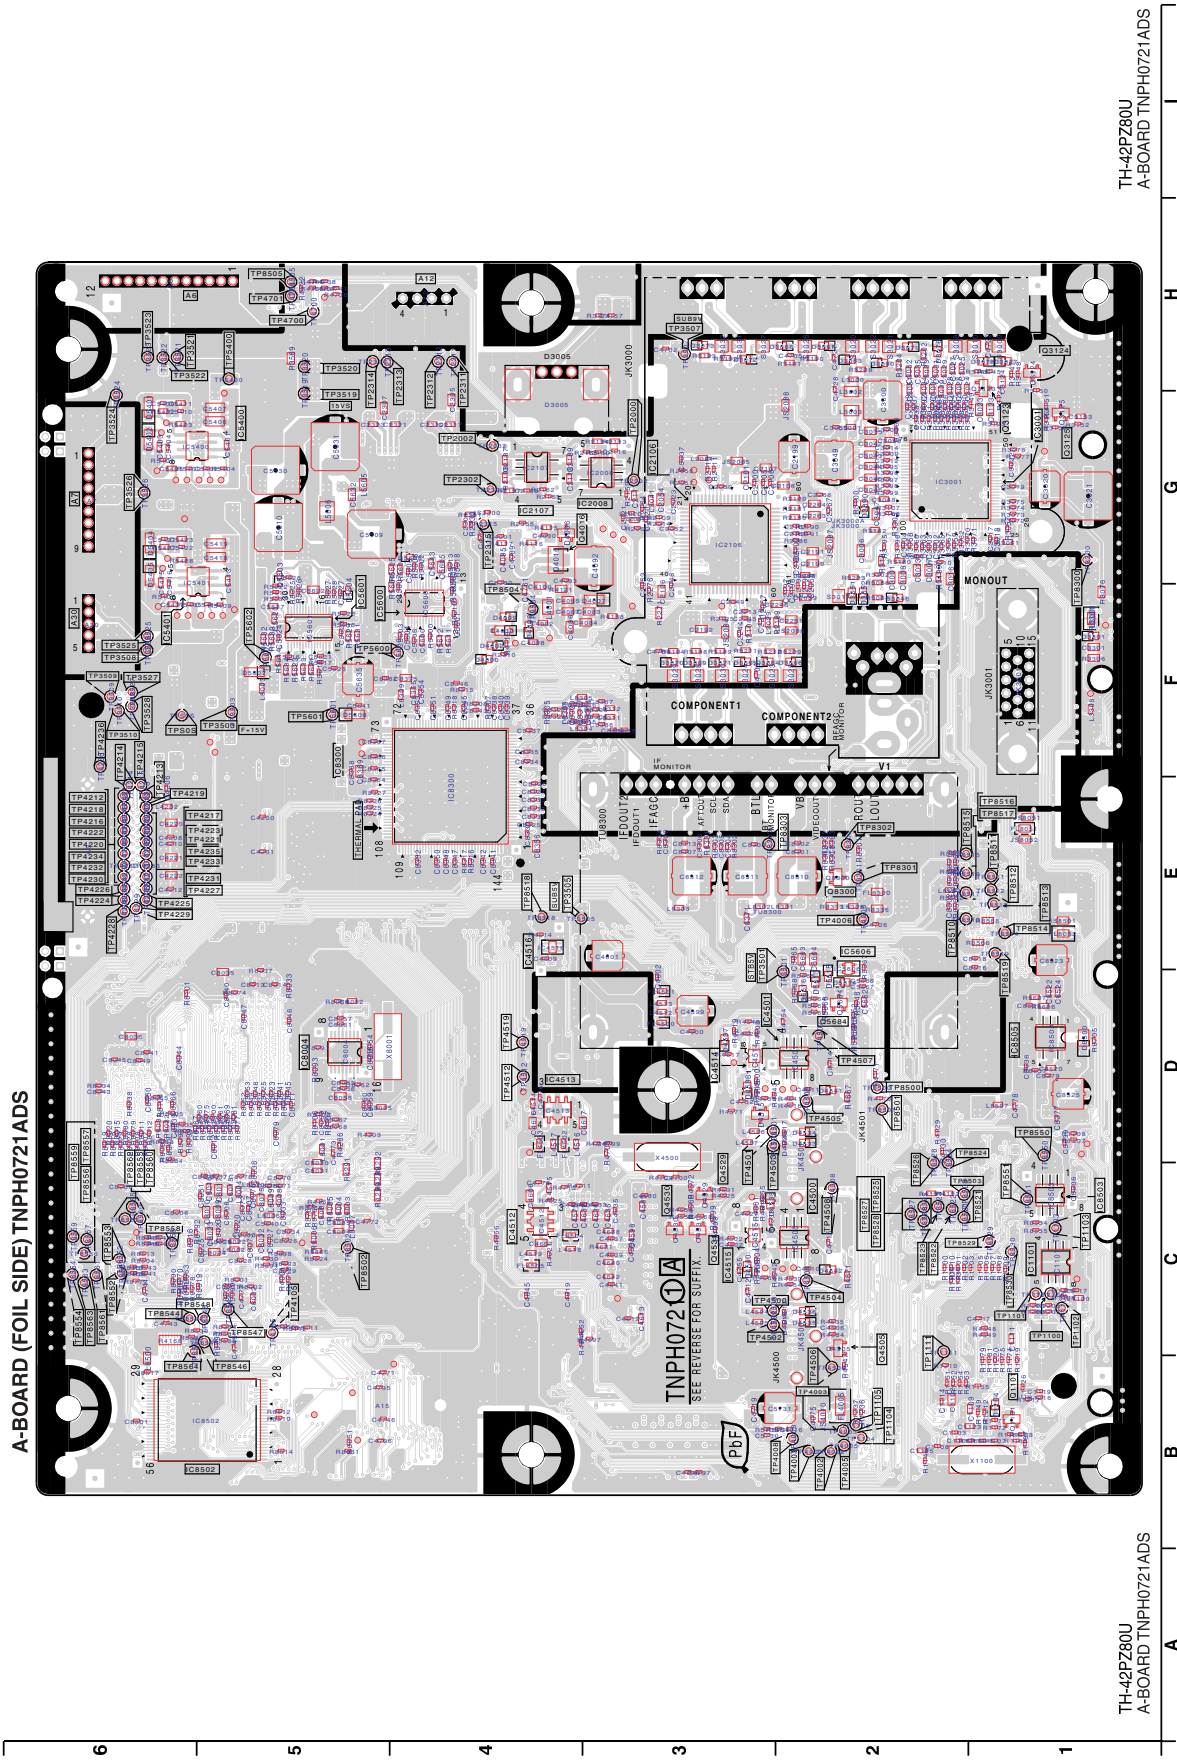


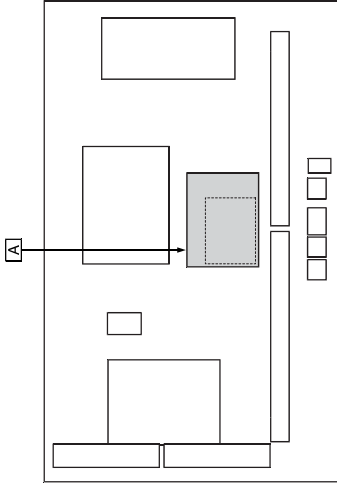

Parts Location

A-BOARD (FOIL SIDE)					
IC	TRANSISTOR	TEST POINT			
IC1101	Q1101	TP1100	C-1	TP4216	C-1
IC2008	Q3123	TP1101	B-1	TP4218	H-4
IC2106	Q3124	TP1102	G-1	TP4219	H-5
IC2107	Q3125	TP1103	G-1	TP4220	E-2
IC2108	Q4116	TP1104	C-1	TP4221	E-1
IC2400	Q4118	TP1105	B-2	TP4222	E-1
IC4501	Q4529	TP1111	B-2	TP4223	E-1
IC4512	Q4530	TP2000	G-3	TP4224	E-1
IC4513	TP2002	G-4	G-4	TP4225	E-1
IC4514	TP2302	H-4	H-4	TP4226	E-1
IC4515	TP2311	H-4	H-4	TP4227	E-4
IC4516	TP2312	H-4	H-4	TP4228	E-1
IC5400	TP2313	H-4	H-4	TP4229	E-6
IC5401	TP2314	H-5	H-5	TP4230	E-6
IC5600	TP2315	G-4	G-4	TP4231	E-6
IC5601	TP3501	E-3	E-3	TP4232	C-2
IC5606	TP3503	F-5	F-5	TP4234	C-2
IC8004	TP3505	E-4	E-4	TP4235	C-2
IC8005	TP3506	F-5	F-5	TP4236	F-6
IC8502	TP3508	F-6	F-6	TP4500	C-3
IC8503	TP3509	F-6	F-6	TP4501	C-1
IC8505	TP3510	F-6	F-6	TP4502	C-1
	TP3510	G-5	G-5	TP4503	C-4
	TP3520	H-5	H-5	TP4504	B-5
	TP3521	H-6	H-6	TP4505	C-5
	TP3522	H-6	H-6	TP4506	C-5
	TP3523	H-6	H-6	TP4507	D-1
	TP3524	G-6	G-6	TP4508	D-2
	TP3525	F-6	F-6	TP4509	C-2
	TP3526	G-6	G-6	TP4512	D-4
	TP3527	F-6	F-6	TP4519	D-4
	TP3528	F-6	F-6	TP4519	D-4
	TP4001	H-5	H-5	TP4519	D-4
	TP4002	B-2	B-2	TP4700	H-5
	TP4003	B-2	B-2	TP4701	H-5
	TP4005	B-2	B-2	TP5400	H-5
	TP4006	E-2	E-2	TP5600	F-5
	TP4008	B-2	B-2	TP5601	F-5
	TP4105	C-5	C-5	TP5602	F-5
	TP4106	E-6	E-6	TP8300	G-1
	TP4213	E-6	E-6	TP8301	E-2
	TP4214	E-6	E-6	TP8302	E-2
	TP4215	E-6	E-6	TP8500	D-2
				TP8501	D-2
				TP8502	C-5
				TP8503	C-5
				TP8504	C-5
				TP8505	C-6
				TP8506	C-6
				TP8507	C-6
				TP8508	C-6
				TP8509	C-6
				TP8510	C-6
				TP8511	C-6
				TP8512	C-6
				TP8513	C-6
				TP8514	C-6
				TP8515	C-6
				TP8516	C-6
				TP8517	C-6
				TP8518	C-6
				TP8519	C-6
				TP8520	C-6
				TP8521	C-6
				TP8522	C-6
				TP8523	C-6
				TP8524	C-6
				TP8525	C-6
				TP8526	C-6
				TP8527	C-6
				TP8528	C-6
				TP8529	C-6
				TP8530	C-6
				TP8531	C-6
				TP8532	C-6
				TP8533	C-6
				TP8534	C-6
				TP8535	C-6
				TP8536	C-6
				TP8537	C-6
				TP8538	C-6
				TP8539	C-6
				TP8540	C-6
				TP8541	C-6
				TP8542	C-6
				TP8543	C-6
				TP8544	C-6
				TP8545	C-6
				TP8546	C-6
				TP8547	C-6
				TP8548	C-6
				TP8549	C-6
				TP8550	C-6
				TP8551	C-6
				TP8552	C-6
				TP8553	C-6
				TP8554	C-6
				TP8555	C-6
				TP8556	C-6
				TP8557	C-6
				TP8558	C-6
				TP8559	C-6
				TP8560	C-6
				TP8561	C-6
				TP8562	C-6
				TP8563	C-6
				TP8564	C-6
				TP8565	C-6
				TP8566	C-6
				TP8567	C-6
				TP8568	C-6
				TP8569	C-6
				TP8570	C-6
				TP8571	C-6
				TP8572	C-6
				TP8573	C-6
				TP8574	C-6
				TP8575	C-6
				TP8576	C-6
				TP8577	C-6
				TP8578	C-6
				TP8579	C-6
				TP8580	C-6
				TP8581	C-6
				TP8582	C-6
				TP8583	C-6
				TP8584	C-6
				TP8585	C-6
				TP8586	C-6
				TP8587	C-6
				TP8588	C-6
				TP8589	C-6
				TP8590	C-6
				TP8591	C-6
				TP8592	C-6
				TP8593	C-6
				TP8594	C-6
				TP8595	C-6
				TP8596	C-6
				TP8597	C-6
				TP8598	C-6
				TP8599	C-6
				TP8600	C-6
				TP8601	C-6
				TP8602	C-6
				TP8603	C-6
				TP8604	C-6
				TP8605	C-6
				TP8606	C-6
				TP8607	C-6
				TP8608	C-6
				TP8609	C-6
				TP8610	C-6
				TP8611	C-6
				TP8612	C-6
				TP8613	C-6
				TP8614	C-6
				TP8615	C-6
				TP8616	C-6
				TP8617	C-6
				TP8618	C-6
				TP8619	C-6
				TP8620	C-6
				TP8621	C-6
				TP8622	C-6
				TP8623	C-6
				TP8624	C-6
				TP8625	C-6
				TP8626	C-6
				TP8627	C-6
				TP8628	C-6
				TP8629	C-6
				TP8630	C-6
				TP8631	C-6
				TP8632	C-6
				TP8633	C-6
				TP8634	C-6
				TP8635	C-6
				TP8636	C-6
				TP8637	C-6
				TP8638	C-6
				TP8639	C-6
				TP8640	C-6
				TP8641	C-6
				TP8642	C-6
				TP8643	C-6
				TP8644	C-6
				TP8645	C-6
				TP8646	C-6
				TP8647	C-6
				TP8648	C-6
				TP8649	C-6
				TP8650	C-6
				TP8651	C-6
				TP8652	C-6
				TP8653	C-6
				TP8654	C-6
				TP8655	C-6
				TP8656	C-6
				TP8657	C-6
				TP8658	C-6
				TP8659	C-6
				TP8660	C-6
				TP8661	C-6
				TP8662	C-6
				TP8663	C-6
				TP8664	C-6
				TP8665	C-6
				TP8666	C-6
				TP8667	C-6
				TP8668	C-6
				TP8669	C-6
				TP8670	C-6
				TP8671	C-6
				TP8672	C-6
				TP8673	C-6
				TP8674	C-6
				TP8675	C-6
				TP8676	C-6
				TP8677	C-6
				TP8678	C-6
				TP8679	C-6
				TP8680	C-6
				TP8681	C-6
				TP8682	C-6
				TP8683	C-6
				TP8684	C-6
				TP8685	C-6
				TP8686	C-6
				TP8687	C-6
				TP8688	C-6
				TP8689	C-6
				TP8690	C-6
				TP8691	C-6
				TP8692	C-6
				TP8693	C-6
				TP8694	C-6
				TP8695	C-6
				TP8696	C-6
				TP8697	C-6
				TP8698	C-6
				TP8699	C-6
				TP8700	C-6
				TP8701	C-6
				TP8702	C-6
				TP8703	C-6
				TP8704	C-6
				TP8705	C-6
				TP8706	C-6
				TP8707	C-6
				TP8708	C-6
				TP8709	C-6
				TP8710	C-6
				TP8711	C-6
				TP8712	C-6
				TP8713	C-6
				TP8714	C-6
				TP8715	C-6
				TP8716	C-6
				TP8717	C-6
				TP8718	C-6
				TP8719	C-6
				TP8720	C-6
				TP8721	C-6
				TP8722	C-6
				TP8723	C-6
				TP8724	C-6
				TP8725	C-6
				TP8726	C-6
				TP8727	C-6
				TP8728	C-6
				TP8729	C-6
				TP8730	C-6
				TP8731	C-6
				TP8732	C-6
				TP8733	C-6
				TP8734	C-6
				TP8735	C-6
				TP8736	C-6
				TP8737	C-6
				TP8738	C-6
				TP8739	C-6
				TP8740	C-6
				TP8741	C-6
				TP8742	C-6
				TP8743	C-6
				TP8744	C-6
				TP8745	C-6
				TP8746	C-6
				TP8747	C-6
				TP8748	C-6
				TP8749	C-6
				TP8750	C-6


A-BOARD (COMPONENT SIDE) TNPH0721ADS

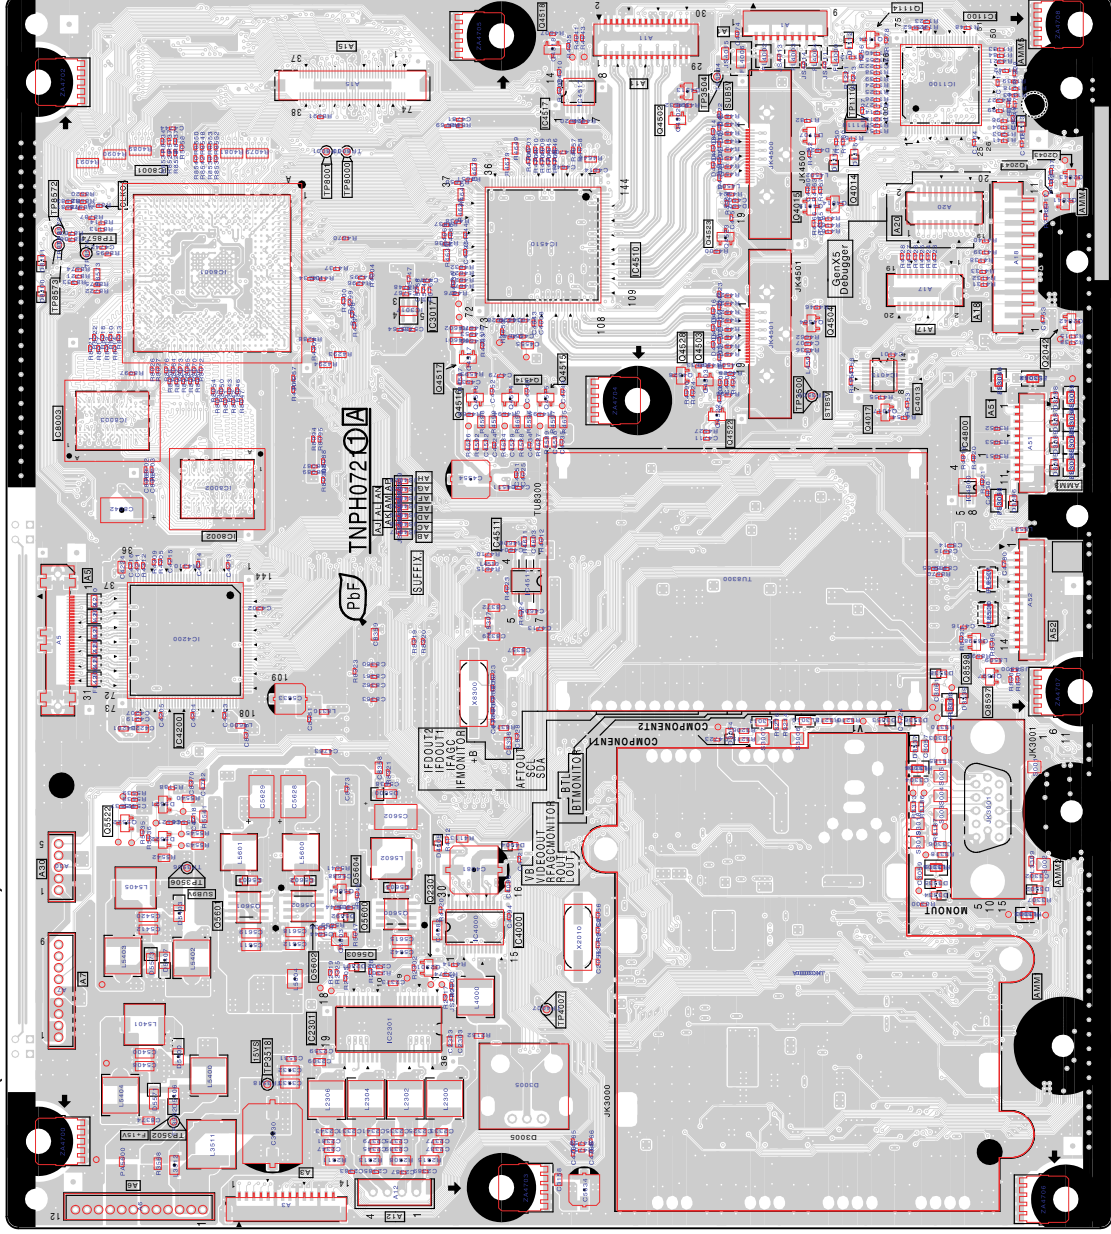


TH-42PZ80U
A-BOARD TNPH0721ADS

TH-42PZ80U
A-BOARD TNPH0721ADS

12.6. C1-Board

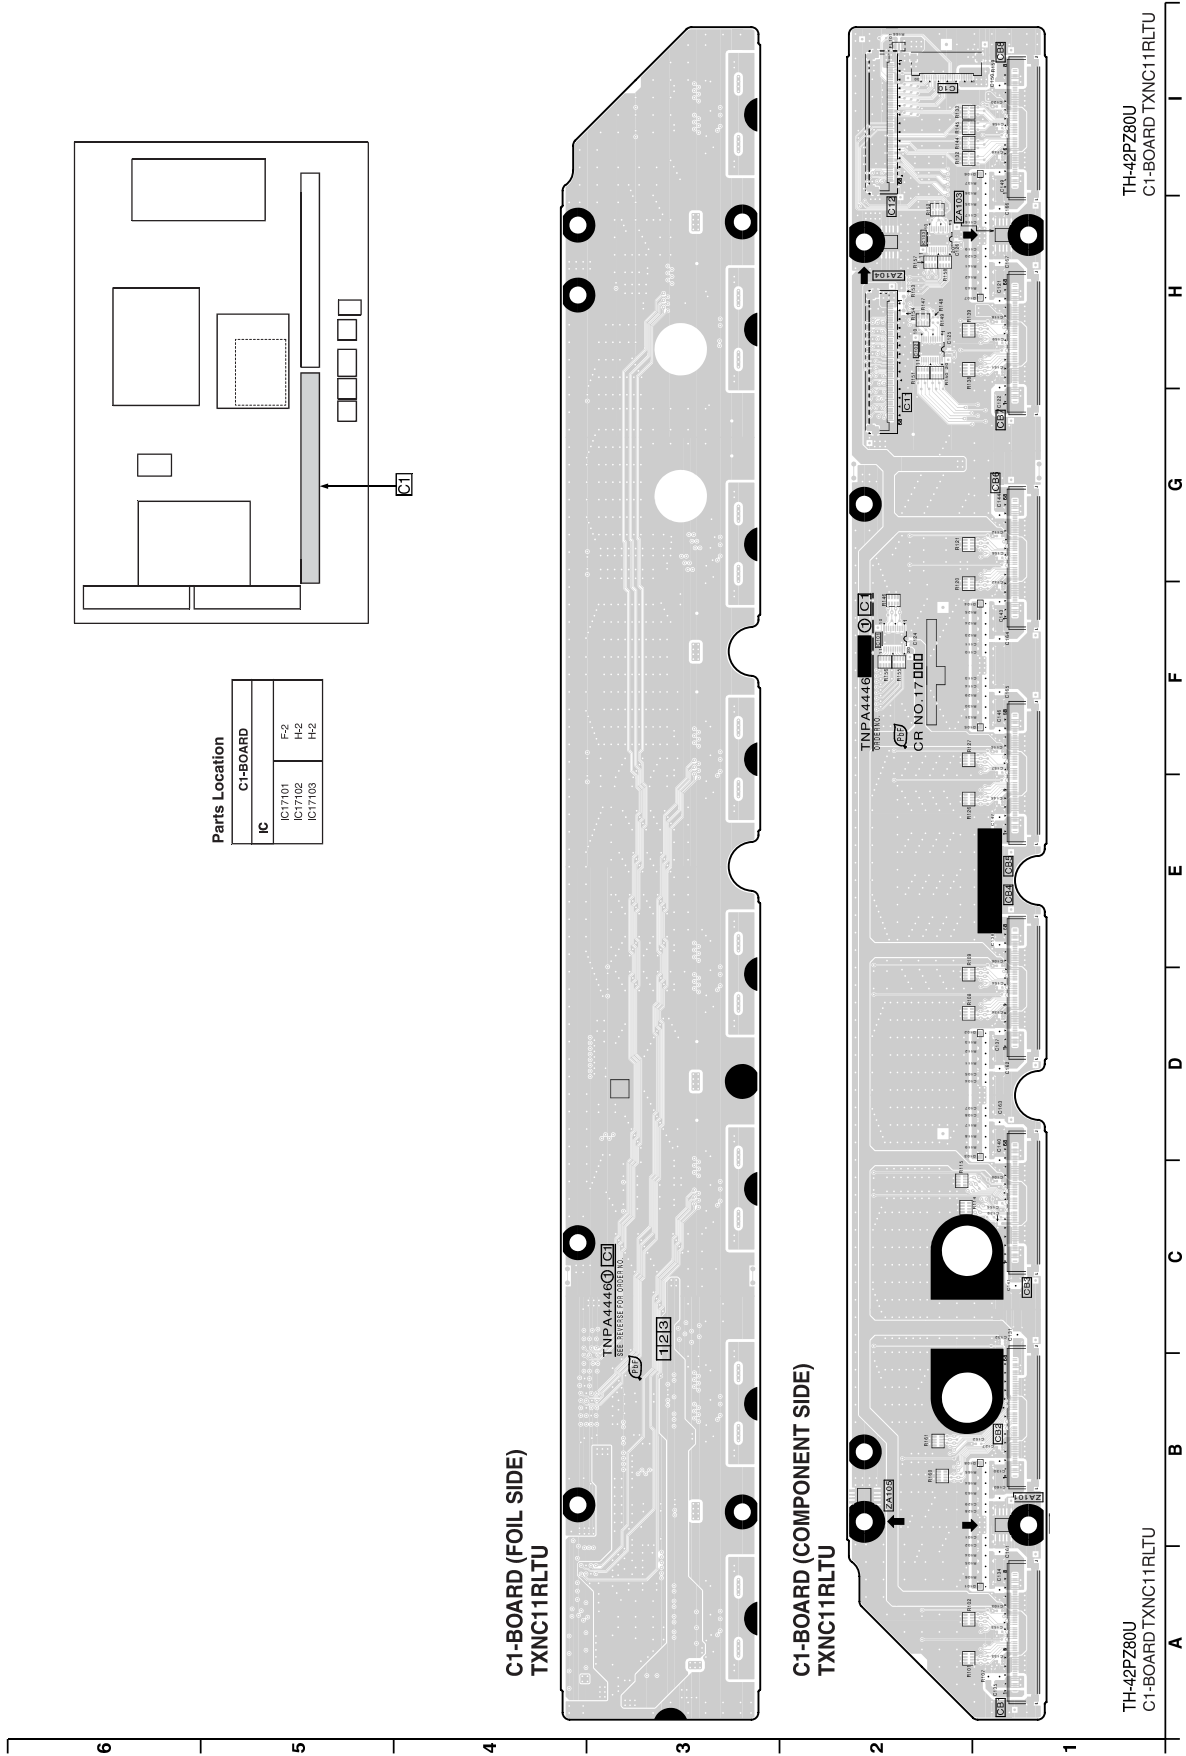


12.7. C2-Board

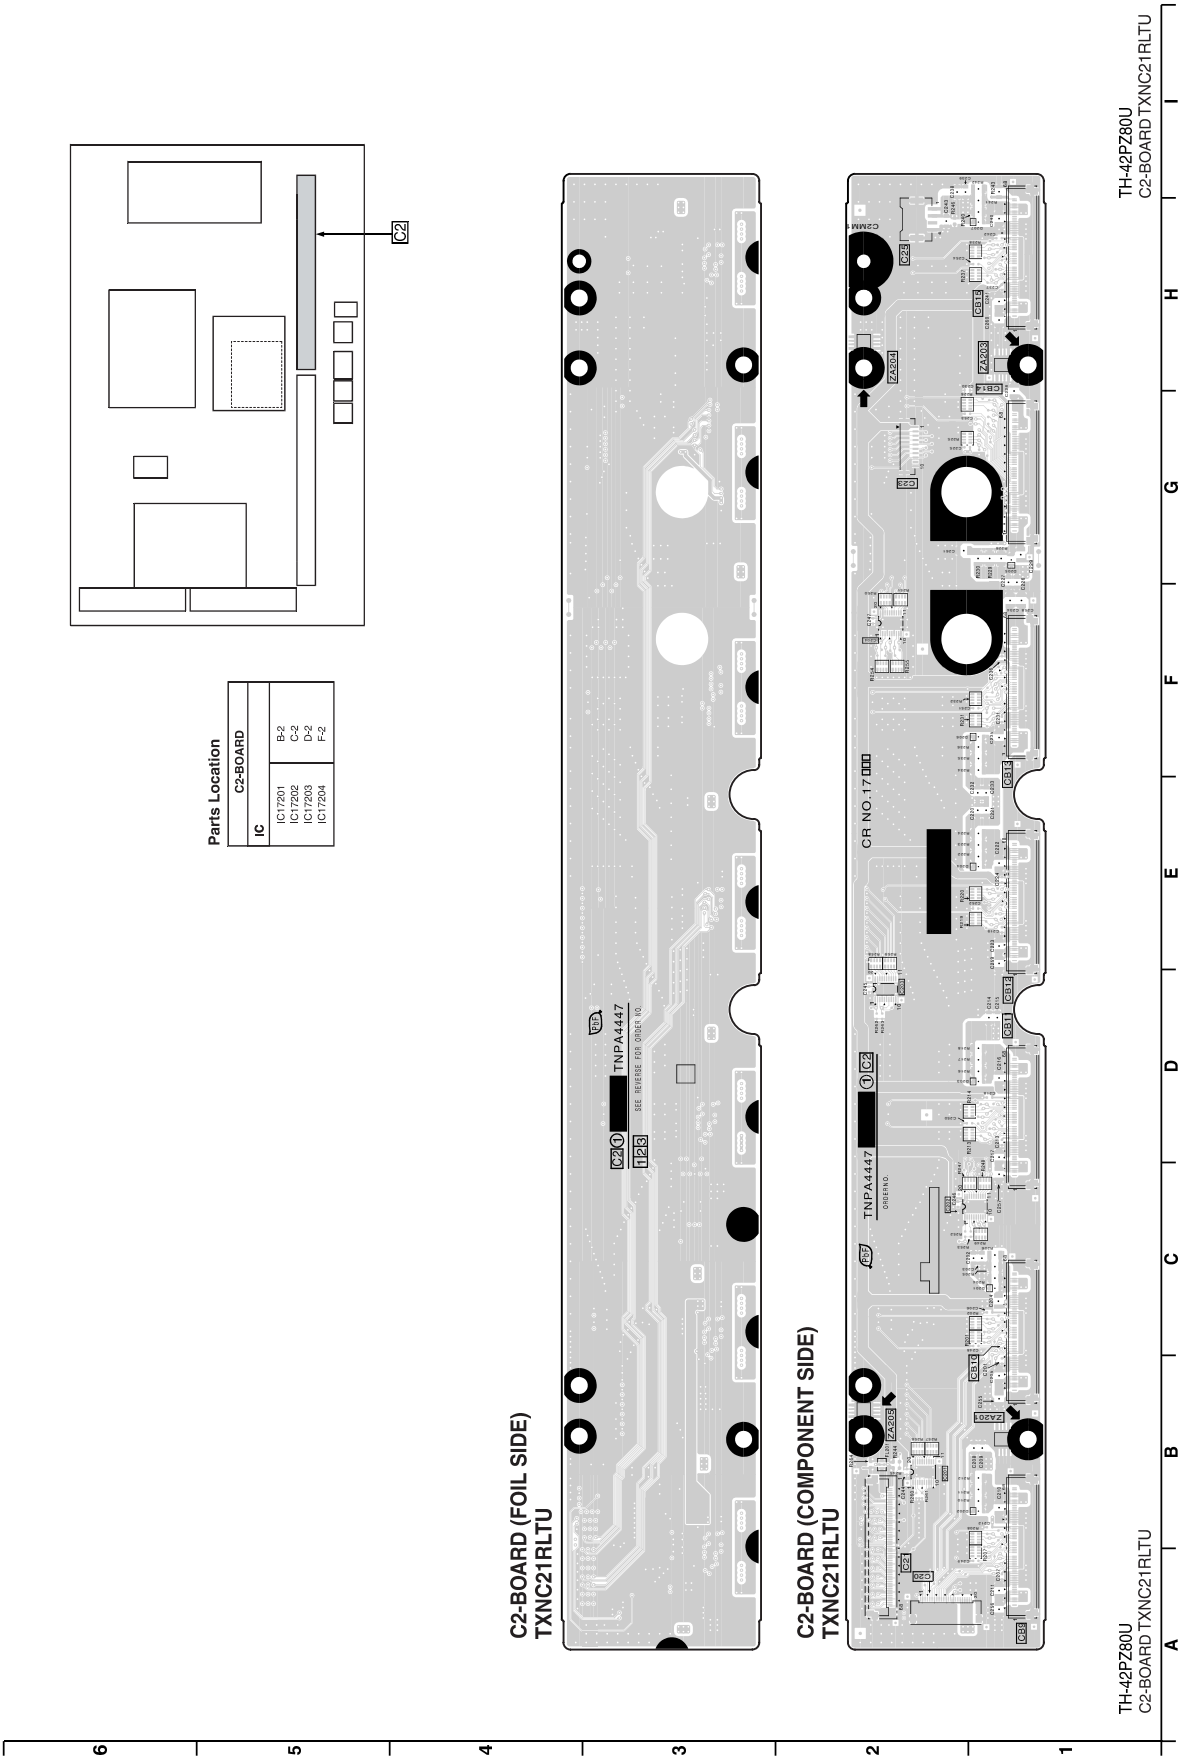


12.8. SC-Board

SC-BOARD (FOIL SIDE)
TXNSC1RLTUS

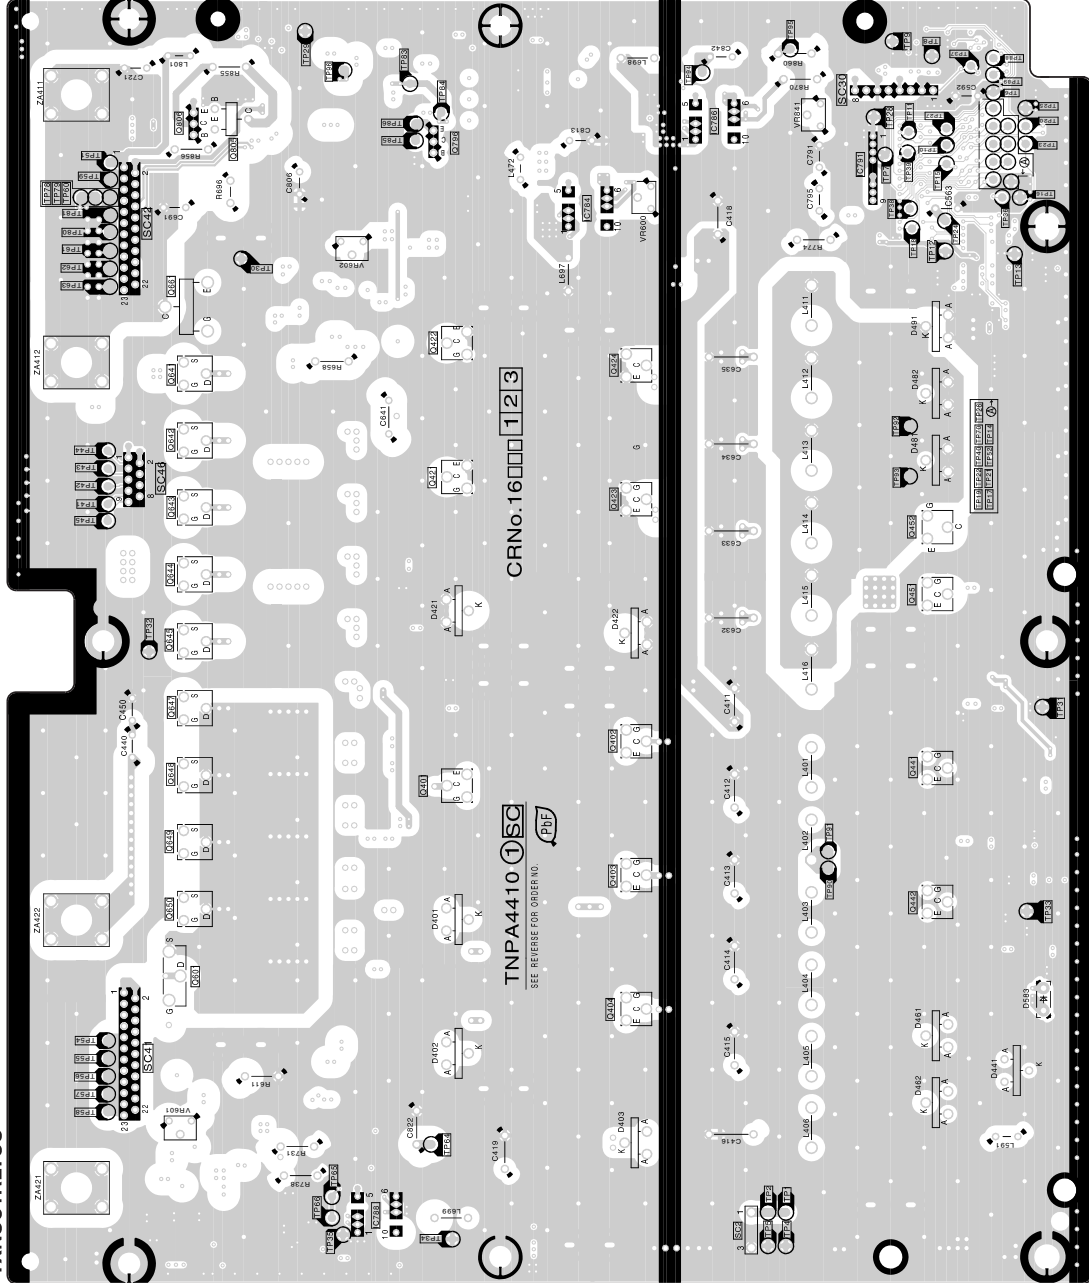

TH-42PZ80U
SC-BOARD TXNSC1RLTUS

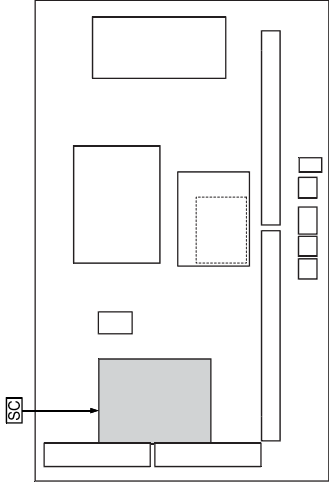


Parts Location


SC-BOARD (FOIL SIDE)		
IC	TEST POINT	
IC16784	TP1	TP40
IC16786	TP2	TP41
IC16788	TP4	TP42
IC16791	TP5	TP43
TRANSISTOR	TP6	TP44
	TP7	TP45
O16401	TP8	TP51
	TP9	TP52
O16402	TP10	TP54
O16403	TP11	TP55
O16404	TP12	TP56
O16421	TP13	TP57
O16422	TP14	TP58
O16423	TP15	TP59
O16424	TP16	TP60
O16441	TP17	TP61
O16442	TP18	TP62
O16451	TP19	TP63
O16452	TP20	TP64
O16453	TP21	TP65
O16454	TP22	TP70
O16455	TP23	TP77
O16456	TP24	TP78
O16457	TP25	TP79
O16458	TP26	TP80
O16459	TP27	TP81
O16460	TP28	TP82
O16461	TP29	TP83
O16462	TP30	TP84
O16463	TP31	TP85
O16464	TP32	TP86
O16465	TP33	TP87
O16466	TP34	TP88
O16467	TP35	TP89
O16468	TP36	TP90
O16469	TP37	TP91
O16470	TP38	TP92
O16471	TP39	TP93
O16472	TP40	TP94
O16473	TP41	TP95
O16474	TP42	TP96
O16475	TP43	TP97
O16476	TP44	TP98
O16477	TP45	TP99
O16478	TP46	TP100
O16479	TP47	TP101
O16480	TP48	TP102
O16481	TP49	TP103
O16482	TP50	TP104
O16483	TP51	TP105
O16484	TP52	TP106
O16485	TP53	TP107
O16486	TP54	TP108
O16487	TP55	TP109
O16488	TP56	TP110
O16489	TP57	TP111
O16490	TP58	TP112
O16491	TP59	TP113
O16492	TP60	TP114
O16493	TP61	TP115
O16494	TP62	TP116
O16495	TP63	TP117
O16496	TP64	TP118
O16497	TP65	TP119
O16498	TP66	TP120
O16499	TP67	TP121
O16500	TP68	TP122
O16501	TP69	TP123
O16502	TP70	TP124
O16503	TP71	TP125
O16504	TP72	TP126
O16505	TP73	TP127
O16506	TP74	TP128
O16507	TP75	TP129
O16508	TP76	TP130
O16509	TP77	TP131
O16510	TP78	TP132
O16511	TP79	TP133
O16512	TP80	TP134
O16513	TP81	TP135
O16514	TP82	TP136
O16515	TP83	TP137
O16516	TP84	TP138
O16517	TP85	TP139
O16518	TP86	TP140
O16519	TP87	TP141
O16520	TP88	TP142
O16521	TP89	TP143
O16522	TP90	TP144
O16523	TP91	TP145
O16524	TP92	TP146
O16525	TP93	TP147
O16526	TP94	TP148
O16527	TP95	TP149
O16528	TP96	TP150
O16529	TP97	TP151
O16530	TP98	TP152
O16531	TP99	TP153
O16532	TP100	TP154
O16533	TP101	TP155
O16534	TP102	TP156
O16535	TP103	TP157
O16536	TP104	TP158
O16537	TP105	TP159
O16538	TP106	TP160
O16539	TP107	TP161
O16540	TP108	TP162
O16541	TP109	TP163
O16542	TP110	TP164
O16543	TP111	TP165
O16544	TP112	TP166
O16545	TP113	TP167
O16546	TP114	TP168
O16547	TP115	TP169
O16548	TP116	TP170
O16549	TP117	TP171
O16550	TP118	TP172
O16551	TP119	TP173
O16552	TP120	TP174
O16553	TP121	TP175
O16554	TP122	TP176
O16555	TP123	TP177
O16556	TP124	TP178
O16557	TP125	TP179
O16558	TP126	TP180
O16559	TP127	TP181
O16560	TP128	TP182
O16561	TP129	TP183
O16562	TP130	TP184
O16563	TP131	TP185
O16564	TP132	TP186
O16565	TP133	TP187
O16566	TP134	TP188
O16567	TP135	TP189
O16568	TP136	TP190
O16569	TP137	TP191
O16570	TP138	TP192
O16571	TP139	TP193
O16572	TP140	TP194
O16573	TP141	TP195
O16574	TP142	TP196
O16575	TP143	TP197
O16576	TP144	TP198
O16577	TP145	TP199
O16578	TP146	TP200
O16579	TP147	TP201
O16580	TP148	TP202
O16581	TP149	TP203
O16582	TP150	TP204
O16583	TP151	TP205
O16584	TP152	TP206
O16585	TP153	TP207
O16586	TP154	TP208
O16587	TP155	TP209
O16588	TP156	TP210
O16589	TP157	TP211
O16590	TP158	TP212
O16591	TP159	TP213
O16592	TP160	TP214
O16593	TP161	TP215
O16594	TP162	TP216
O16595	TP163	TP217
O16596	TP164	TP218
O16597	TP165	TP219
O16598	TP166	TP220
O16599	TP167	TP221
O16600	TP168	TP222
O16601	TP169	TP223
O16602	TP170	TP224
O16603	TP171	TP225
O16604	TP172	TP226
O16605	TP173	TP227
O16606	TP174	TP228
O16607	TP175	TP229
O16608	TP176	TP230
O16609	TP177	TP231
O16610	TP178	TP232
O16611	TP179	TP233
O16612	TP180	TP234
O16613	TP181	TP235
O16614	TP182	TP236
O16615	TP183	TP237
O16616	TP184	TP238
O16617	TP185	TP239
O16618	TP186	TP240
O16619	TP187	TP241
O16620	TP188	TP242
O16621	TP189	TP243
O16622	TP190	TP244
O16623	TP191	TP245
O16624	TP192	TP246
O16625	TP193	TP247
O16626	TP194	TP248
O16627	TP195	TP249
O16628	TP196	TP250
O16629	TP197	TP251
O16630	TP198	TP252
O16631	TP199	TP253
O16632	TP200	TP254
O16633	TP201	TP255
O16634	TP202	TP256
O16635	TP203	TP257
O16636	TP204	TP258
O16637	TP205	TP259
O16638	TP206	TP260
O16639	TP207	TP261
O16640	TP208	TP262
O16641	TP209	TP263
O16642	TP210	TP264
O16643	TP211	TP265
O16644	TP212	TP266
O16645	TP213	TP267
O16646	TP214	TP268
O16647	TP215	TP269
O16648	TP216	TP270
O16649	TP217	TP271
O16650	TP218	TP272
O16651	TP219	TP273
O16652	TP220	TP274
O16653	TP221	TP275
O16654	TP222	TP276
O16655	TP223	TP277
O16656	TP224	TP278
O16657	TP225	TP279
O16658	TP226	TP280
O16659	TP227	TP281
O16660	TP228	TP282
O16661	TP229	TP283
O16662	TP230	TP284
O16663	TP231	TP285
O16664	TP232	TP286
O16665	TP233	TP287
O16666	TP234	TP288
O16667	TP235	TP289
O16668	TP236	TP290
O16669	TP237	TP291
O16670	TP238	TP292
O16671	TP239	TP293
O16672	TP240	TP294
O16673	TP241	TP295
O16674	TP242	TP296
O16675	TP243	TP297
O16676	TP244	TP298
O16677	TP245	TP299
O16678	TP246	TP300
O16679	TP247	TP301
O16680	TP248	TP302
O16681	TP249	TP303
O16682	TP250	TP304
O16683	TP251	TP305
O16684	TP252	TP306
O16685	TP253	TP307
O16686	TP254	TP308
O16687	TP255	TP309
O16688	TP256	TP310
O16689	TP257	TP311
O16690	TP258	TP312
O16691	TP259	TP313
O16692	TP260	TP314
O16693	TP261	TP315
O16694	TP262	TP316
O16695	TP263	TP317
O16696	TP264	TP318
O16697	TP265	TP319
O16698	TP266	TP320
O16699	TP267	TP321
O16700	TP268	TP322
O16701	TP269	TP323
O16702	TP270	TP324
O16703	TP271	TP325
O16704	TP272	TP326
O16705	TP273	TP327
O16706	TP274	TP328
O16707	TP275	TP329
O16708	TP276	TP330
O16709	TP277	TP331
O16710	TP278	TP332
O16711	TP279	TP333
O16712	TP280	TP334
O16713	TP281	TP335
O16714	TP282	TP336
O16715	TP283	TP337
O16716	TP284	TP338
O16717	TP285	TP339
O16718	TP286	TP340
O16719	TP287	TP341
O16720	TP288	TP342
O16721	TP289	TP343
O16722	TP290	TP344
O16723	TP291	TP345
O16724	TP292	TP346
O16725	TP293	TP347
O16726	TP294	TP348
O16727	TP295	TP349
O16728	TP296	TP350
O16729	TP297	TP351
O16730	TP298	TP352
O16731	TP299	TP353
O16732	TP300	TP354
O16733	TP301	TP355
O16734	TP302	TP356
O16735	TP303	TP357
O16736	TP304	TP358
O16737	TP305	TP359
O16738	TP306	TP360
O16739	TP307	TP361
O16740	TP308	TP362
O16741	TP309	TP363
O16742	TP310	TP364
O16743	TP311	TP365
O16744	TP312	TP366
O16745	TP313	TP367
O16746	TP314	TP368
O16747	TP315	TP369
O16748	TP316	TP370
O16749	TP317	TP371
O16750	TP318	TP372
O16751	TP319	TP373
O16752	TP320	TP374
O16753	TP321	TP375
O16754	TP322	TP376
O16755	TP323	TP377
O16756	TP324	TP378
O16757	TP325	TP379
O16758	TP326	TP380
O16759	TP327	TP381
O16760	TP328	TP382
O16761	TP329	TP383
O16762	TP330	TP384
O16763	TP331	TP385
O16764	TP332	TP386
O16765	TP333	TP387
O16766	TP334	TP388
O16767	TP335	TP389
O16768	TP336	TP390
O16769	TP337	TP391
O16770	TP338	TP392
O16771	TP339	TP393
O16772	TP340	TP394
O16773	TP341	TP395
O16774	TP342	TP396
O16775	TP343	TP397
O16776	TP344	TP398
O16777	TP345	TP399
O16778	TP346	TP400
O16779	TP347	TP401
O16780	TP348	TP402
O16781	TP349	TP403
O16782	TP350	TP404
O16783	TP351	TP405
O16784	TP352	TP406
O16785	TP353	TP407
O16786	TP354	TP408
O16787	TP355	TP409
O16788	TP356	TP410
O16789	TP357	TP411
O16790	TP358	TP412
O16791	TP359	TP413
O16792	TP360	TP414
O16793	TP361	TP415
O16794	TP362	TP416
O16795	TP363	TP417
O16796	TP364	TP418
O16797	TP365	TP419
O16798	TP366	TP420
O16799	TP367	TP421
O16800	TP368	TP422
O16801	TP369	TP423
O16802	TP370	TP424
O16803	TP371	TP425
O16804	TP372	TP426
O16805	TP373	TP427
O16806	TP374	TP428
O16807	TP375	TP429
O16808	TP376	TP430
O16809	TP377	TP431
O16810	TP378	TP432
O16811	TP379	TP433
O16812	TP380	TP434
O16813	TP381	TP435
O16814	TP382	TP436
O16815	TP383	TP437
O16816	TP384	TP438
O16817	TP385	TP439
O16		



12.9. SU-Board

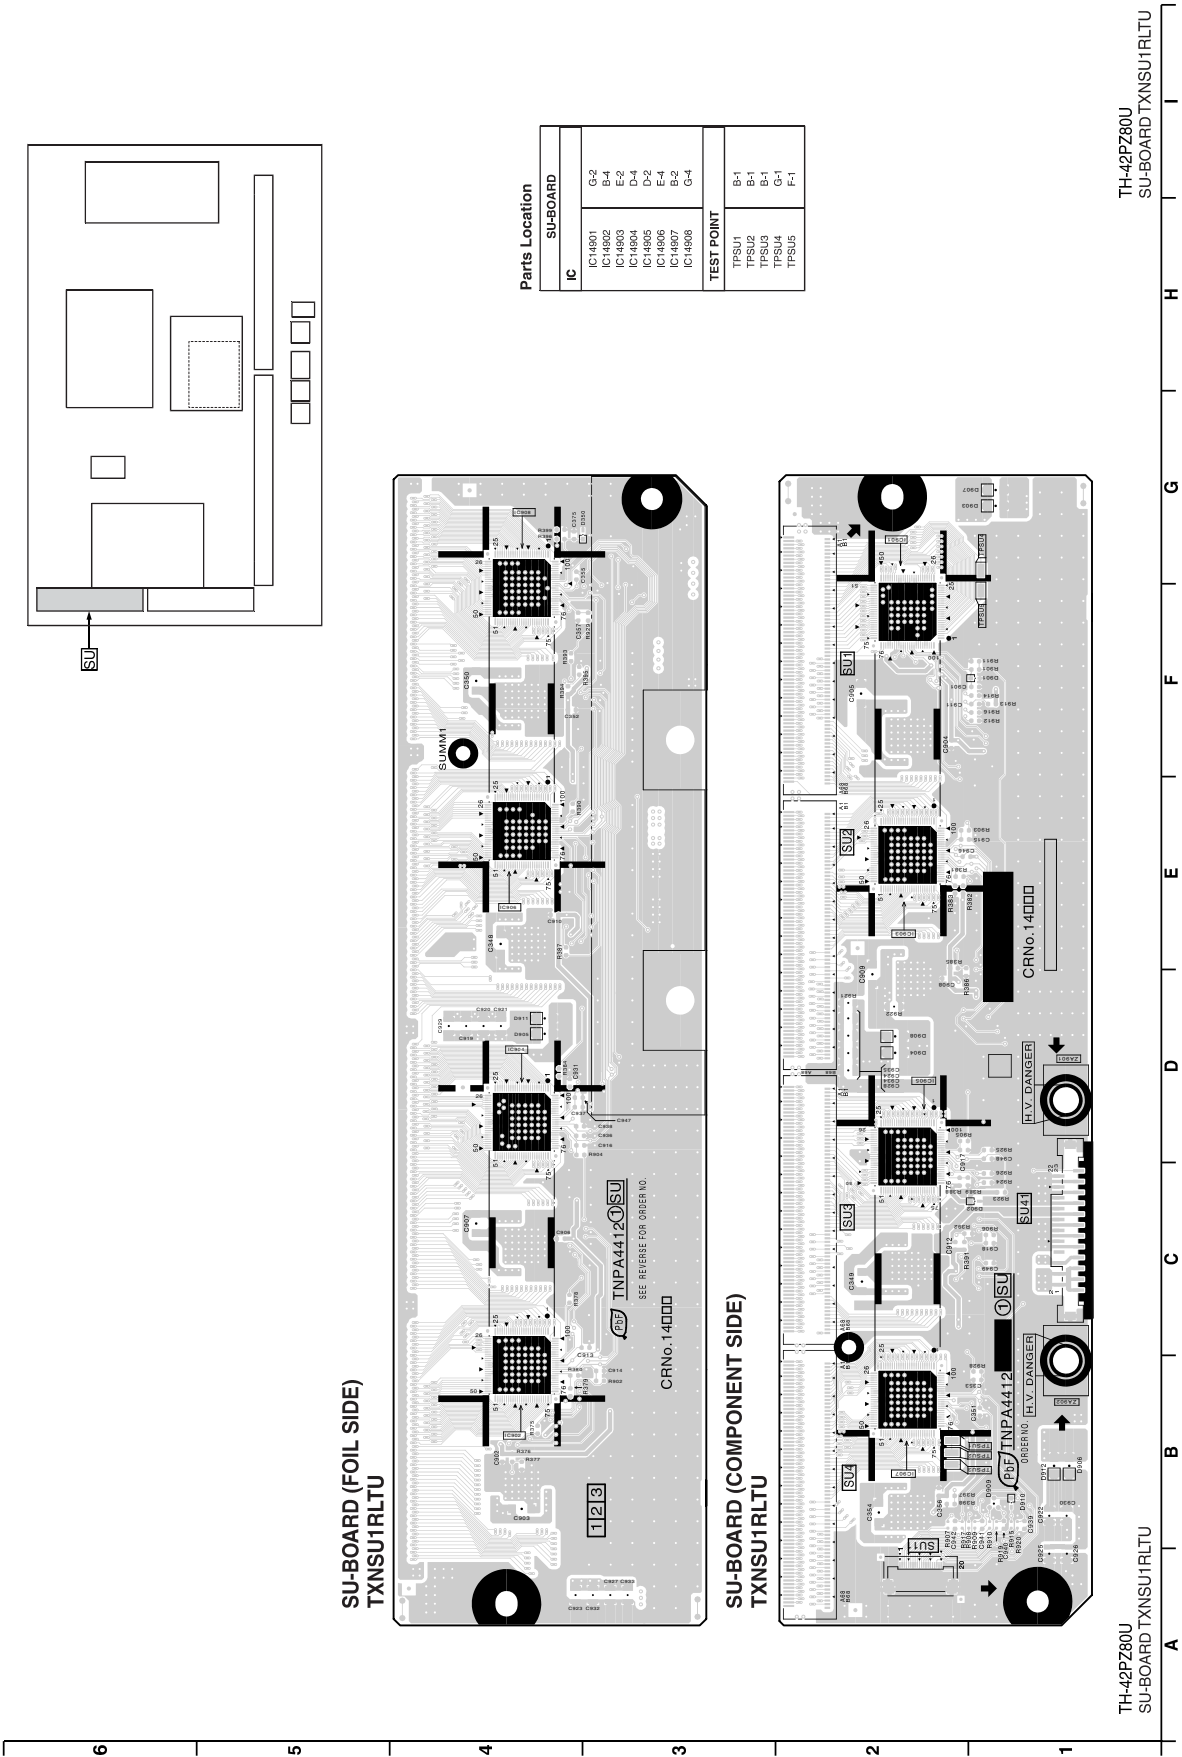


12.10. SD-Board

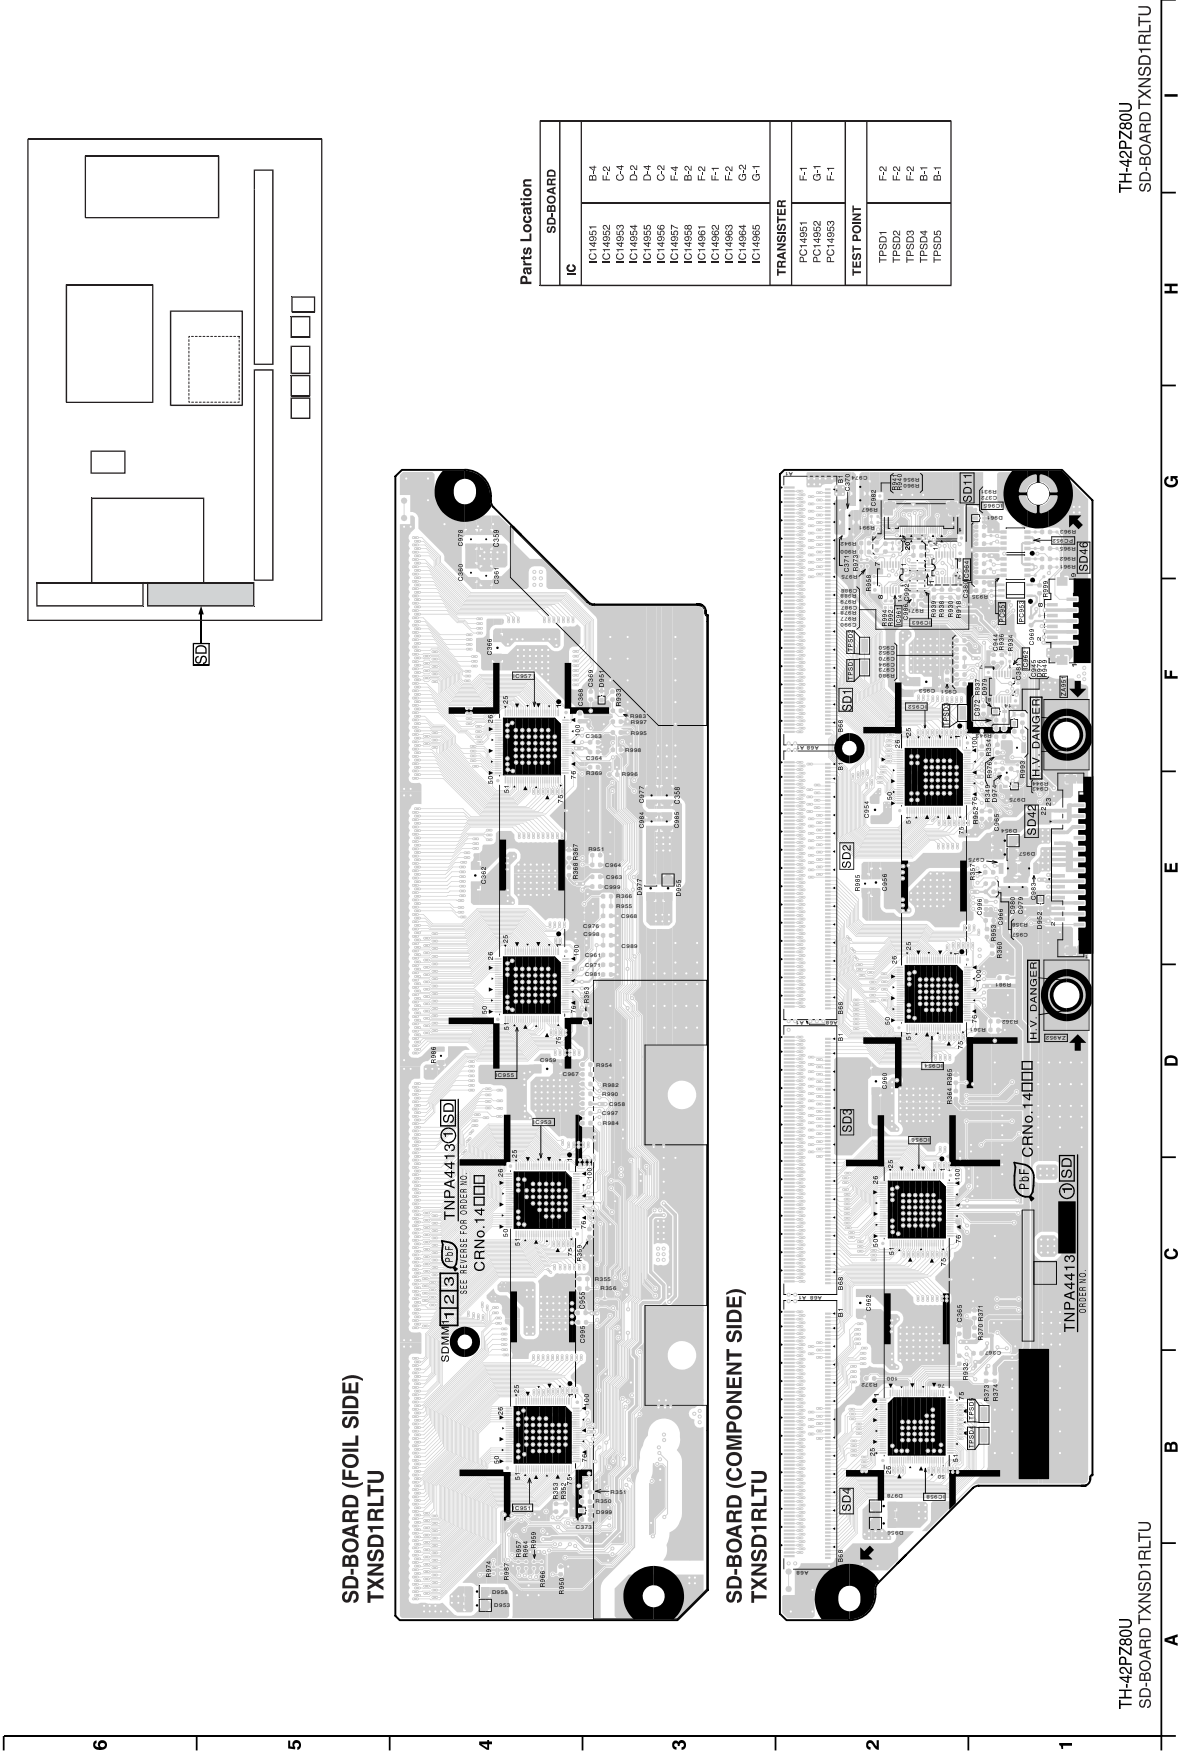


[illegible]

Parts Location

SS-BOARD (COMPONENT SIDE)			
IC	TRANSISTOR		TEST POINT
IC16131	E-3	G-4	TPS058
IC16151	E-1	F-4	TPSS1
IC16191	I-3	F-4	TPVDA
IC16241	I-2	F-4	TPV6
IC16251	I-3	C-4	TPVSUS
IC16251	G-2	C-4	
IC16302	G-2	C-4	
IC16303	I-2	B-4	
			VOLUME
			VR16000
			G-1

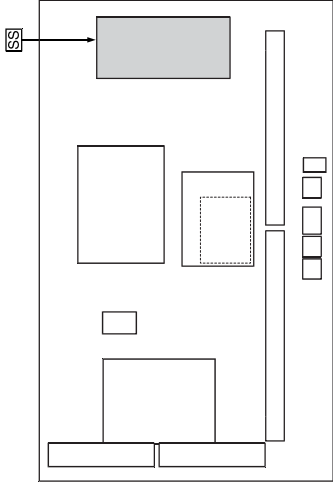

SS-BOARD (COMPONENT SIDE)
TXNSS1RLTU

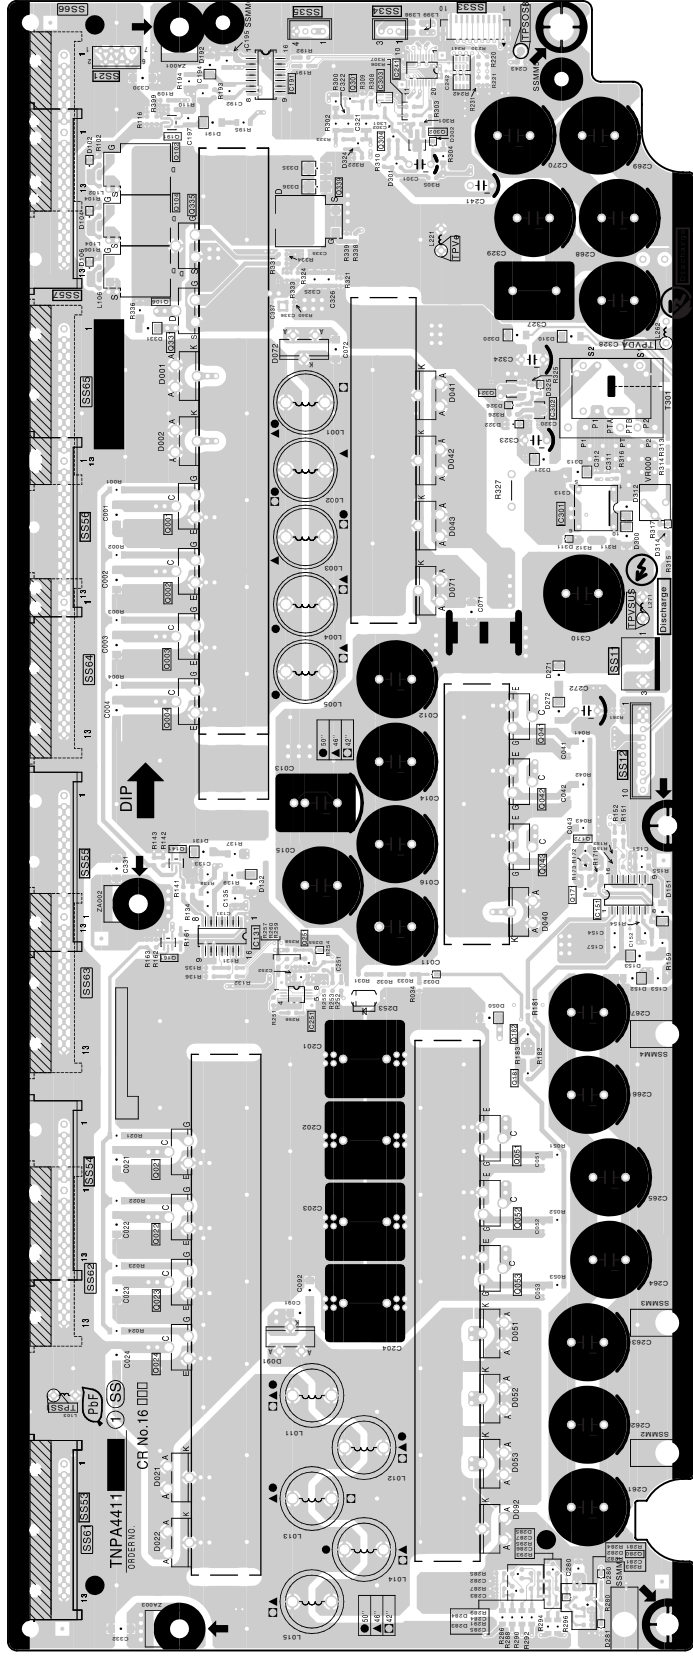


TH-42PZ80U
SS-BOARD TXNSS1RLTU

TH-42PZ80U
SS-BOARD TXNSS1RLTU


13 Exploded View and Replacement Parts List

13.1. Exploded View and Mechanical Replacement Parts List


13.1.1. Exploded View

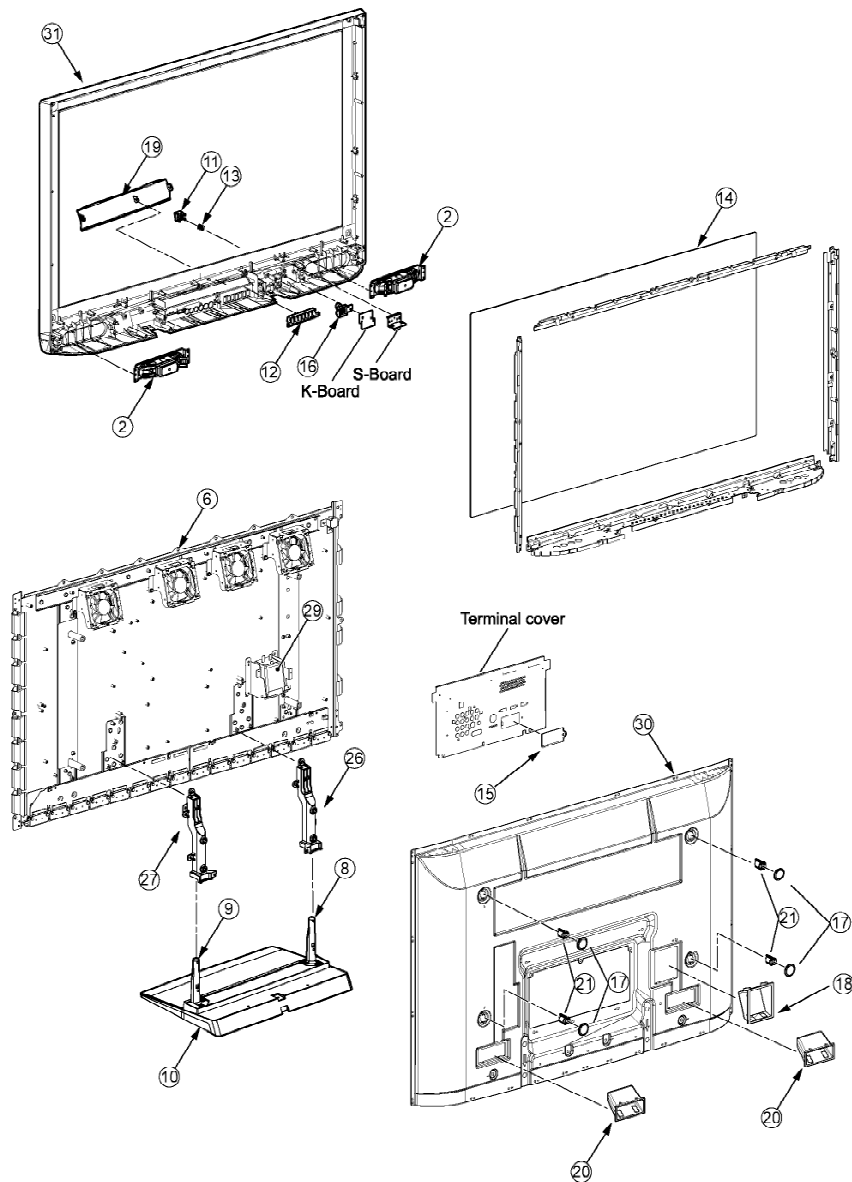

13.1.2. Fan part location

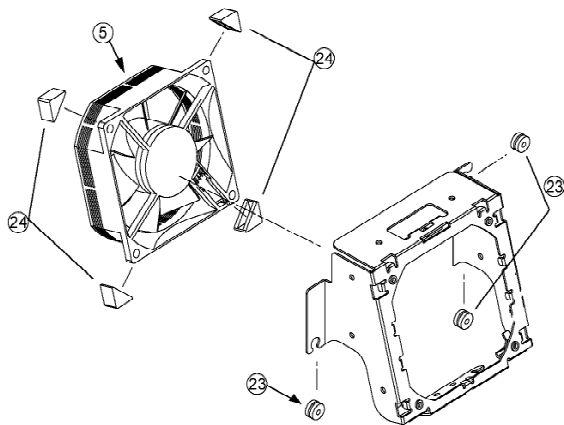


13.1.3. Accessories

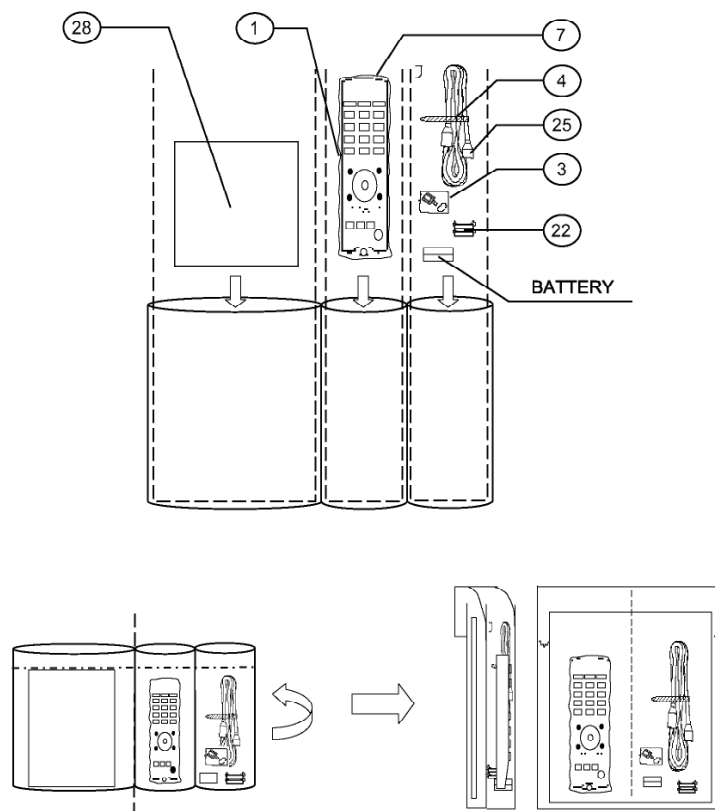





13.1.4. Mechanical Replacement Parts List

Note: Important Safety Notice

Components identified by  mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.

Note: All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG.
Parts mentioned [PAVCA] are supplied by PAVCA.

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	1	10030-0042000	BATTERY COVER	1	PAVCA
	2	EAS16S06A	SPEAKER	2	
	3	K1RYYYA00016	F-TYPE (5C)	1	
	4	K2CG3YY00029	AC CORD (USA)	1	PAVCA
	5	L6FAYYYH0050	FAN (80MM)	4	
	6	MD42F11A1J	PLASMA DISPLAY PANEL	1	
	7	N2QAYB000221	REMOTE CONTROL	1	PAVCA
	8	TBLA3614	STAND POLE LEFT	1	
	9	TBLA3615	STAND POLE RIGHT	1	
	10	TBLX0036	PEDESTAL STAND	1	PAVCA
	11	TBX2AA4602	POWER BUTTON	1	PAVCA
	12	TBX2AA4702	CONTROL BUTTON	1	PAVCA
	13	TES2AA0191	POWER BUTTON SPRING	1	PAVCA
		THEJ006J	SCREW	2	
		THEJ016J	SCREW (AC INRET:2)	2	
		THEL037N	SCREW	30	
		THEL0429	SCREW	15	
		THEL060N	SCREW (STAND-TV)	4	
		THTD013N	SCREW	12	
		THTF011N	SCREW	44	
	14	TKGA5429S	FRONT GLASS	1	PAVCA
	15	TKK2AA7701	ADJUSTMENT COVER	1	PAVCA
	16	TKK2AA8301	LED PANEL	1	PAVCA
	17	TKP2AA1932	M8 SPACER CAP	4	PAVCA
	18	TKP2AA7901	INLET COVER	1	PAVCA
	19	TKPB20202	DOOR	1	PAVCA
	20	TKR2AA00161	REAR COVER HANDLE	2	PAVCA
	21	TMM2AX0111	M8 SPACER	4	PAVCA
		TMM7464-2	CLAMPER	1	
		TMM7468-1	CLAMPER	1	
		TMME199	CLAMPER	1	
		TMME260	CLAMPER	6	
		TMME287	CLAMPER	10	
	22	TMME289	CLAMPER	2	
		TMME292	CLAMPER	22	
		TMME293	CLAMPER	3	
	23	TMMJ068	RUBBER (FAN)	12	
	24	TMMJ082	SPONGE (FAN CORNER)	16	
	25	TMXX041	AC CORD CLAMPER	2	
	26	TMZ2AX0271	STAND BRACKET LEFT	1	PAVCA
	27	TMZ2AX0281	STAND BRACKET RIGHT	1	PAVCA
		TPD169487	JOINT	4	
		TPEB331	BAG (PEDESTAL STAND)	1	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
		TPEH273	TOP PROTECT SHEET	2	
	28	TQB2AA0777	INSTRUCTION BOOK (ENG/FRE/SPA)	1	PAVCA
		TQZH983	SCREW USE HANDBILL	1	
		TSXL519	CABLE (SU11-SD11)	1	
		TSXL597	CABLE (C10-C20)	1	
		TSXL657	CABLE (D20-SC20)	1	
		TSXL660	CABLE (D31-C11/D32-C12/D33-C21)	3	
	29	TXALK01RPTU	AC INLET ASSY	1	PAVCA
	30	TXFKU09TSER	REAR COVER	1	PAVCA
	31	TXFKY01RPTUB	CABINET ASSY	1	PAVCA
		TXJA12RPTU	SPEAKER LEAD (A12-SPL/SPR)	1	PAVCA
		TXJSWRRPTU	SPEAKER LEAD (SP-SPR/L)	2	PAVCA
		XSB3+6FJ	SCREW (LCD MTG)	2	
		XTB4+12GFJ	SCREW	39	
		XTB4+12GFJK	SCREW	19	
		XTW3+10TFJ	SCREW	7	
		XYN3+F8FJ	SCREW	18	
		XYN3+J12FJ	SCREW	44	
		XYN3+J8FJ	SCREW	4	
		XYN4+E8FJ	SCREW	1	
		XYN4+F10FJ	SCREW	24	
		XYN5+C15FJ	SCREW	6	
		XYN5+F18FN	SCREW (STAND POLE)	4	
		XZB17X19C03	POLY BAG (STAND POLE)	1	

13.2. Electrical Replacement Parts List

13.2.1. Replacement Parts List Notes

Important Safety Notice

*Components identified by \triangle mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.*

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W
Type Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V
Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide Metal Film	J : $\pm 5\%$
S : Solid	K : $\pm 10\%$
W : Wire Wound	M : $\pm 20\%$

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polyprop lene	G : $\pm 3\text{pF}$
J : $\pm 5\text{pF}$	
T : Tantalum	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : +100%, -0%
	Z : +80%, -20%

13.2.2. Electrical Replacement Parts List

Note: All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG. Parts mentioned [PAVCA] are supplied by PAVCA.

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	A1	K1KA09AA00220	9P CONNECTOR	1	
	A3	K1KA14B00129	14P CONNECTOR	1	
	A5	K1KB31AA0140	31P CONNECTOR	1	
	A6	K1KA12AA0194	12P CONNECTOR	1	
	A7	K1KA09AA0193	9P CONNECTOR	1	
	A11	K1KA30B00078	30P CONNECTOR	1	
	A12	K1KA04AA0190	4P CONNECTOR	1	
	A17	K1KA20AA0009	20P CONNECTOR	1	
	A18	K1KA11AA0715	11P CONNECTOR	1	
	A30	K1KA05AA0193	5P CONNECTOR	1	
	A51	K1KA11A00178	11P CONNECTOR	1	
	A52	K1KA14A00248	14P CONNECTOR	1	
	AMM1-M5	TMME292	CLAMPER	5	
	C10	K1MN30BA0255	30P CONNECTOR	1	
	C11,12	K1MN68BA0266	68P CONNECTOR	2	
	C20	K1MN30BA0255	30P CONNECTOR	1	
	C21	K1MN68BA0266	68P CONNECTOR	1	
	C23	K1KA10B00218	10P CONNECTOR	1	
	C25	K1KA04BA0107	4P CONNECTOR	1	
	C858,59	ECJ2VB1E104K	C 0.1UF, K, 25V	2	
	C860	ECA1EHG471	E 470UF, 25V	1	
	C861,62	ECJ2VB1E104K	C 0.1UF, K, 25V	2	
	C869	ECA1EHG471	E 470UF, 25V	1	
	C1102	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C1103,04	FLG1C104A116	C 0.10UF, K, 16V	2	
	C1106	FLG1H270A731	E 27UF, 50V	1	
	C1107	FLG1H220A731	E 22UF, 50V	1	
	C1108	FLG1C104A116	C 0.10UF, K, 16V	1	
	C1109	FLH1A1050032	E 10UF, 50V	1	
	C1111	FLH1A1050032	E 10UF, 50V	1	
	C1112	FLG1C104A116	C 0.10UF, K, 16V	1	
	C1114	FLG1C104A116	C 0.10UF, K, 16V	1	
	C1117	FLG1C104A116	C 0.10UF, K, 16V	1	
	C1122	FLG1E103A123	C 0.010UF, K, 16V	1	
	C1123	FLH1A1050032	E 10UF, 50V	1	
	C2023	FLG1C104A116	C 0.10UF, K, 16V	1	
	C2048-50	FLG1C104A116	C 0.10UF, K, 16V	3	
	C2052,53	FLG1C104A116	C 0.10UF, K, 16V	2	
	C2054	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C2055	FLG1H120A731	E 12UF, 50V	1	
	C2056	FLG1H150A731	E 15UF, 50V	1	
	C2058	FLG1C104A116	C 0.10UF, K, 16V	1	
	C2059	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C2100	FLG1C104A116	C 0.10UF, K, 16V	1	
	C2101	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C2105,06	FLG1C104A116	C 0.10UF, K, 16V	2	
	C2107,08	FLJ1A106A043	C 0.010UF, K, 10V	2	
	C2111	FLH0J2250008	C 2.2UF, K, 16V	1	
	C2116	FLG1H471A731	E 470UF, 50V	1	
	C2118	FLH1A1050032	E 10UF, 50V	1	
	C2126	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C2180,81	FLG1E103A123	C 0.010UF, K, 16V	2	
	C2186	FLG1C104A116	C 0.10UF, K, 16V	1	
	C2187	FLH0J2250008	C 2.2UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2188	FlG1H471A731	E 470UF, 50V	1	
	C2189	FlH1A1050032	E 10UF, 50V	1	
	C2190	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C2192	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C2195-98	FlG1E103A123	C 0.010UF, K, 16V	4	
	C2213	FlG1H102A730	E 1000UF, 50V	1	
	C2216	FlG1C104A116	C 0.10UF, K, 16V	1	
	C2244	FlG1C104A116	C 0.10UF, K, 16V	1	
	C2245	FlG1H102A730	E 1000UF, 50V	1	
	C2251	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C2263,64	FlJ1A106A043	C 0.010UF, K, 10V	2	
	C2301,02	FlG1C104A116	C 0.10UF, K, 16V	2	
	C2303	FlJ1E105A171	C 1 UF 25V	1	
	C2305	FlJ1E105A171	C 1 UF 25V	1	
	C2307	FlJ1E105A171	C 1 UF 25V	1	
	C2309	FlJ1E105A171	C 1 UF 25V	1	
	C2313	FlH1A1050032	E 10UF, 50V	1	
	C2317	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2319	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2321	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2323	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2333	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C2335	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C2337	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2339	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2341	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C2343	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C2345	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2347	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2353	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2359	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2375	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2377	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2379	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2381	FlH1H223A970	C 0.22UF, K, 50V	1	
	C2383	FlG1H102A730	E 1000UF, 50V	1	
	C2385	FlG1H102A730	E 1000UF, 50V	1	
	C2387	FlG1H102A730	E 1000UF, 50V	1	
	C2389	FlG1H102A730	E 1000UF, 50V	1	
	C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
	C2515	FlH1H103A970	C 0.001UF, K, 50V	1	
	C2521	FlH1H103A970	C 0.001UF, K, 50V	1	
	C3001	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C3006-08	FlJ1A106A043	C 0.010UF, K, 10V	3	
	C3010,11	FlG1C1030008	C 0.010UF, K, 16V	2	
	C3013	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C3015,16	FlJ1A106A043	C 0.010UF, K, 10V	2	
	C3017	FlG1C104A116	C 0.10UF, K, 16V	1	
	C3019	FlG1C104A116	C 0.10UF, K, 16V	1	
	C3020	F2G1C220A022	E 22UF, 16V	1	
	C3021	F2G1A221A149	E 220UF, 10V	1	
	C3022	FlG1C104A116	C 0.10UF, K, 16V	1	
	C3023	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C3024-35	FlH1A1050032	E 10UF, 50V	12	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3042-47	F1J1A106A043	C 0.010UF, K, 10V	6	
	C3049	F2G1A101A019	E 100UF, 10V	1	
	C3050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3123,24	F1J1A106A043	C 0.010UF, K, 10V	2	
	C3157	F1G1C104A081	C 0.10UF, K, 16V	1	
	C3530	EEF1E471P	E 470UF, 25V	1	
	C3532	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C3750	F1J1H102A721	C 1000UF, 50V	1	
	C3801,02	F1G1C104A116	C 0.10UF, K, 16V	2	
	C3803	F1H1A1050032	E 10UF, 50V	1	
	C3804	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3806-12	F1G1C104A116	C 0.10UF, K, 16V	7	
	C3813	F1J0J106A004	C 0.010UF, K, 16V	1	
	C3814	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3815-20	ECJ0EB1C103K	C 0.010UF, K, 16V	6	
	C3823	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3827	F1J1A475A039	C 4.7UF, K, 10V	1	
	C3829	F1H1A1050032	E 10UF, 50V	1	
	C4075	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4081	EEH1A221P	C 220PF, J, 10V	1	
	C4082	F1K1C1060004	C 0.010UF, 16V	1	
	C4083-87	F1J1H474A757	C 0.47UF, 50V	5	
	C4089	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4090	F1G1H181A731	E 180UF, 50V	1	PAVCA
	C4091	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4092	F2G1V220A020	E 22UF, 35V	1	
	C4093	F1G1H102A730	E 1000UF, 50V	1	
	C4094	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4095	F1H0J2250008	C 2.2UF, K, 16V	1	
	C4096	F1H1A1050032	E 10UF, 50V	1	
	C4098	F1H1A1050032	E 10UF, 50V	1	
	C4101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4200-08	F1G1C104A116	C 0.10UF, K, 16V	9	
	C4210-15	F1G1C104A116	C 0.10UF, K, 16V	6	
	C4216	F1G1H1020008	E 1000UF, 50V	1	
	C4219	F1G1H1020008	E 1000UF, 50V	1	
	C4220-24	F1J0J106A021	C 0.010UF, K, 16V	5	
	C4500,01	F1G1C104A116	C 0.10UF, K, 16V	2	
	C4533	F1G1H680A731	E 68UF, 50V	1	
	C4534,35	F1G1C104A116	C 0.10UF, K, 16V	2	
	C4547-52	F1G1C104A116	C 0.10UF, K, 16V	6	
	C4553	F1G1H102A730	E 1000UF, 50V	1	
	C4554	F2G1C470A022	E 47UF, 16V	1	
	C4555	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4574	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4575	F1H1A1050032	E 10UF, 50V	1	
	C4580	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4585	F1H1A1050032	E 10UF, 50V	1	
	C4595	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4596	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4598	F1H1A1050032	E 10UF, 50V	1	
	C4599	F2G0J470A019	E 47UF 6.3V	1	
	C4600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4601	F2G0J470A019	E 47UF 6.3V	1	
	C4602	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4603	F1H0J2250008	C 2.2UF, K, 16V	1	
	C4604	F1G1H471A730	E 470UF, 50V	1	PAVCA
	C4605	F1H1A1050032	E 10UF, 50V	1	
	C4606,07	F1J1A106A043	C 0.010UF, K, 10V	2	
	C4608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4612	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4613	F1H1A1050032	E 10UF, 50V	1	
	C4614	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4616,17	F1J1A106A043	C 0.010UF, K, 10V	2	
	C4619	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4624,25	F1G1C104A116	C 0.10UF, K, 16V	2	
	C4628	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4630	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4632	F1H1A1050032	E 10UF, 50V	1	
	C4634	F1H1A1050032	E 10UF, 50V	1	
	C4636	F1H1A1050032	E 10UF, 50V	1	
	C4638	F1H1A1050032	E 10UF, 50V	1	
	C4640	F1H1A1050032	E 10UF, 50V	1	
	C4642	F1H1A1050032	E 10UF, 50V	1	
	C4643-46	F1G1C104A116	C 0.10UF, K, 16V	4	
	C4701	F1G1H102A730	E 1000UF, 50V	1	
	C4702	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4703	F1G1H102A730	E 1000UF, 50V	1	
	C4704,05	F1G1C104A116	C 0.10UF, K, 16V	2	
	C4711,12	F1G1C104A116	C 0.10UF, K, 16V	2	
	C4713,14	F1G1H102A730	E 1000UF, 50V	2	
	C4715	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4716-19	F1G1H102A730	E 1000UF, 50V	4	
	C4721	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4722	F1G1H102A730	E 1000UF, 50V	1	
	C4724	F1G1H102A730	E 1000UF, 50V	1	
	C4725-28	F1G1C104A116	C 0.10UF, K, 16V	4	
	C4741	F1G1H102A730	E 1000UF, 50V	1	
	C4742	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4743	F1G1H102A730	E 1000UF, 50V	1	
	C4744,45	F1G1C104A116	C 0.10UF, K, 16V	2	
	C4746	F1G1H102A730	E 1000UF, 50V	1	
	C4751-55	F1G1C104A116	C 0.10UF, K, 16V	5	
	C4761-63	F1H1H103A970	C 0.001UF, K, 50V	3	
	C4771	F1G1H102A730	E 1000UF, 50V	1	
	C4772	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4773	F1G1H102A730	E 1000UF, 50V	1	
	C4774,75	F1G1C104A116	C 0.10UF, K, 16V	2	
	C4776	F1G1H102A730	E 1000UF, 50V	1	
	C4777-80	F1G1C104A116	C 0.10UF, K, 16V	4	
	C4795-98	F1G1H102A730	E 1000UF, 50V	4	
	C4830	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5400	F1K1A106A021	C 0.010UF, K, 6.3V	1	
	C5401	F1H1E104A129	E 0.1UF, 25V	1	
	C5402	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5404	F1G1E392A123	C 3900UF, Z, 25V	1	PAVCA
	C5405	F1H1E104A129	E 0.1UF, 25V	1	
	C5406	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5408	F1K1A106A021	C 0.010UF, K, 6.3V	1	
	C5412	F1K1C1060004	C 0.010UF, 16V	1	
	C5413	F1H1E104A129	E 0.1UF, 25V	1	
	C5414	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5416	F1G1E472A123	C 4200UF, Z, 25V	1	PAVCA
	C5417	F1H1E104A129	E 0.1UF, 25V	1	
	C5418	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5420	F1K1C1060004	C 0.010UF, 16V	1	
	C5521,22	F1G1C104A116	C 0.10UF, K, 16V	2	
	C5600	F1H1A1050032	E 10UF, 50V	1	
	C5601	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5602	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5603,04	F1G1E103A123	C 0.010UF, K, 16V	2	
	C5605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5606	F1G1H471A730	E 470UF, 50V	1	PAVCA
	C5607	F1G1H221A731	E 220UF, 50V	1	PAVCA
	C5608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5611,12	ECJ3YB1E106M	C 10 UF, K, 25V	2	
	C5615	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5616	F1G1A473A053	E 0.47UF, 10V	1	
	C5617	F1H1A1050032	E 10UF, 50V	1	
	C5618,19	ECJ3YB1E106M	C 10 UF, K, 25V	2	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5620	F1H1E104A129	E 0.1UF, 25V	1	
	C5621	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5623	F1G1H471A730	E 470UF, 50V	1	PAVCA
	C5624	F1G1H221A731	E 220UF, 50V	1	PAVCA
	C5625	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5626,27	F1G1C104A116	C 0.10UF, K, 16V	2	
	C5628,29	ECGRLO680ER	C 68PF, J, 4V	2	
	C5631	EEH1B1E470P	C 47PF, J, 25V	1	
	C5632	F1J1E105A171	C 1 UF 25V	1	
	C5636-41	F1G1C104A116	C 0.10UF, K, 16V	6	
	C5642	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5643	F1H1E104A129	E 0.1UF, 25V	1	
	C5644	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5652	F1H1H102A971	C 1000PF, K, 50V	1	
	C5663,64	F1J0J106A020	C 0.010UF, K, 16V	2	
	C5667	F1G1H101A731	C 100PF, K, 50V	1	
	C5688	F1H1A225A051	E 22UF, 50V	1	
	C5765	F1G1A473A053	E 0.47UF, 10V	1	
	C5766,67	F1G1C1030008	C 0.010UF, K, 16V	2	
	C7701	F1G1H330A731	E 33UF, 50V	1	PAVCA
	C7702	F2G0G470A007	E 47UF 6.3V	1	
	C7703	F1G1H330A731	E 33UF, 50V	1	PAVCA
	C7705	F1G1C104A119	C 0.10UF, K, 16V	1	
	C7708,09	F1G1C104A119	C 0.10UF, K, 16V	2	
	C7726,27	F1G1H330A731	E 33UF, 50V	2	PAVCA
	C7729	F1J1A475A039	C 4.7UF, K, 10V	1	
	C8001	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8002-05	F1H0J1050012	C 1UF, K, 16V	4	
	C8006-08	F1G1C104A116	C 0.10UF, K, 16V	3	
	C8009,10	F1J1A106A043	C 0.010UF, K, 10V	2	
	C8011-14	F1G1C104A116	C 0.10UF, K, 16V	4	
	C8015,16	F1H0J1050012	C 1UF, K, 16V	2	
	C8017	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8018-21	F1G1C104A116	C 0.10UF, K, 16V	4	
	C8022	F1H0J1050012	C 1UF, K, 16V	1	
	C8023,24	F1J1A106A043	C 0.010UF, K, 10V	2	
	C8025-29	F1G1C104A116	C 0.10UF, K, 16V	5	
	C8030,31	F1H0J1050012	C 1UF, K, 16V	2	
	C8032	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8033,34	F1G1C104A116	C 0.10UF, K, 16V	2	
	C8035,36	F1J1A106A043	C 0.010UF, K, 10V	2	
	C8037-41	F1G1C104A116	C 0.10UF, K, 16V	5	
	C8042	ECGRLO680ER	C 68PF, J, 4V	1	
	C8043-51	F1G1C104A116	C 0.10UF, K, 16V	9	
	C8052	F1H0J1050012	C 1UF, K, 16V	1	
	C8053	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8056,57	F1G1C104A116	C 0.10UF, K, 16V	2	
	C8058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8067	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8068	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8070-74	F1G1C104A116	C 0.10UF, K, 16V	5	
	C8075	F1J0G2260001	C 0.001UF, 6.3V	1	
	C8076-80	F1G1C104A081	C 0.10UF, K, 16V	5	
	C8301	F1G1H102A730	E 1000UF, 50V	1	
	C8302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8303	F1G1H103A735	E 0.01UF, 50V	1	PAVCA
	C8304,05	F1G1H221A731	E 220UF, 50V	2	PAVCA
	C8307	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8310	F2G0J2210013	E 220UF 6.3V	1	
	C8311	F2G1V220A020	E 22UF, 35V	1	
	C8312	F2G0J2210013	E 220UF 6.3V	1	
	C8313	F1G1H102A730	E 1000UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8314	F1G1H270A731	E 27UF, 50V	1	
	C8315,16	F1G1H120A731	E 12UF, 50V	2	
	C8317	F1G1H270A731	E 27UF, 50V	1	
	C8318,19	F1G1H101A731	C 100PF, K, 50V	2	
	C8320	F1G1H220A731	E 22UF, 50V	1	
	C8321,22	F1G1C1030008	C 0.010UF, K, 16V	2	
	C8323,24	F1G1H120A731	E 12UF, 50V	2	
	C8325-28	F1G1C104A116	C 0.10UF, K, 16V	4	
	C8330-35	F1G1C104A116	C 0.10UF, K, 16V	6	
	C8336	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8337-43	F1G1C104A116	C 0.10UF, K, 16V	7	
	C8345	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8346	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8347-54	F1G1C104A116	C 0.10UF, K, 16V	8	
	C8355	F1H0J1050012	C 1UF, K, 16V	1	
	C8357-59	F1J1A106A043	C 0.010UF, K, 10V	3	
	C8360-68	F1G1C104A116	C 0.10UF, K, 16V	9	
	C8369	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8370	F1G1H102A730	E 1000UF, 50V	1	
	C8371	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C8372	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8373	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8374,75	F1J1A106A043	C 0.010UF, K, 10V	2	
	C8376	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8377	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8378	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8379	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8380	F1G1H103A735	E 0.01UF, 50V	1	PAVCA
	C8381	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8382	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8386,87	F1G1H102A730	E 1000UF, 50V	2	
	C8501	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8506	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8513	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8517	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8519	F1G1C1030008	C 0.010UF, K, 16V	1	
	C9033,34	F1G1C104A119	C 0.10UF, K, 16V	2	
	C9035,36	F1J1A106A043	C 0.010UF, K, 10V	2	
	C9037	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9055-57	F1G1C104A119	C 0.10UF, K, 16V	3	
	C9058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9067-69	F1G1E103A123	C 0.010UF, K, 16V	3	
	C9096-17	F1G1C104A116	C 0.10UF, K, 16V	22	
	C9119-33	F1G1C104A116	C 0.10UF, K, 16V	15	
	C9135	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9136	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9142	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9143	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9144-50	F1G1C104A116	C 0.10UF, K, 16V	7	
	C9152	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9153-62	F1G1C104A119	C 0.10UF, K, 16V	10	
	C9163	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9164,65	F1G1C104A119	C 0.10UF, K, 16V	2	
	C9168	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9169-96	F1G1C104A116	C 0.10UF, K, 16V	28	
	C9198-09	F1G1C104A116	C 0.10UF, K, 16V	12	
	C9210	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9211	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9212	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C9213-24	FLG1C104A116	C 0.10UF, K, 16V	12	
	C9226-28	FLG1C104A116	C 0.10UF, K, 16V	3	
	C9230-36	FLG1C104A116	C 0.10UF, K, 16V	7	
	C9237	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C9239-44	FLG1C104A116	C 0.10UF, K, 16V	6	
	C9245	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C9246	FLG1C104A116	C 0.10UF, K, 16V	1	
	C9247	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C9248-50	FLG1C104A116	C 0.10UF, K, 16V	3	
	C9469	FLG1C104A119	C 0.10UF, K, 16V	1	
	C9535-50	FLG1C104A116	C 0.10UF, K, 16V	16	
	C9551-53	FLJ1A106A043	C 0.010UF, K, 10V	3	
	C9823	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9825	FLG1H101A731	C 100PF, K, 50V	1	
	C9832	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C9837	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C9840	FLG1E103A123	C 0.010UF, K, 16V	1	
	C9841,42	FLG1C104A119	C 0.10UF, K, 16V	2	
	C9844	FLG1E103A123	C 0.010UF, K, 16V	1	
	C9845,46	FLG1C104A119	C 0.10UF, K, 16V	2	
	C9858	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9859	FLG1E103A123	C 0.010UF, K, 16V	1	
	C9860	FLJ0J475A035	C 4.7UF, K, 16V	1	
	C9861,62	FLH1E104A129	E 0.1UF, 25V	2	
	C9863	FLJ0J475A035	C 4.7UF, K, 16V	1	
	C9864	FLH1E104A129	E 0.1UF, 25V	1	
	C9865,66	ECGRLO680ER	C 68PF, J, 4V	2	
	C9867-72	ECJ3YB1E106M	C 10 UF, K, 25V	6	
	C9873	ECGRLO680ER	C 68PF, J, 4V	1	
	C9874	FLG1H680A731	E 68UF, 50V	1	
	C9877	FLG1H680A731	E 68UF, 50V	1	
	C9878	FLG1E103A123	C 0.010UF, K, 16V	1	
	C9879	FLG1C153A116	C 0.015UF, K, 16V	1	
	C9880	FLG1A563A032	E 0.56UF, 10V	1	
	C9881	FLG1E103A123	C 0.010UF, K, 16V	1	
	C9882	FLG1C822A116	C 8200UF, K, 16V	1	
	C9883	FLG1H101A731	C 100PF, K, 50V	1	
	C9884,85	FLG1H102A730	E 1000UF, 50V	2	
	C9886,87	FLH1E104A129	E 0.1UF, 25V	2	
	C9888	FLG1H361A731	E 360UF, 50V	1	
	C9927-48	FLG1C104A116	C 0.10UF, K, 16V	22	
	C9951	FLG1C104A116	C 0.10UF, K, 16V	1	
	C9961	FLJ1A106A043	C 0.010UF, K, 10V	1	
	C9966	FLG1C104A116	C 0.10UF, K, 16V	1	
	C9971	FLG1H180A731	E 18UF, 50V	1	
	C9972	FLG1H150A731	E 15UF, 50V	1	
	C14352	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14356	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14360,61	FLL2E104A028	E 1000UF, 25V	2	
	C14364	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14368	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14373	FLJ1H102A834	C 1000UF, 50V	1	
	C14901	FLJ1H102A834	C 1000UF, 50V	1	
	C14902	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14904	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14906	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14908	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14910	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14912	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14920-23	FLL2E104A028	E 1000UF, 25V	4	
	C14928	FLL2E104A028	E 1000UF, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C14930	FLL2E104A028	E 1000UF, 25V	1	
	C14931	FLJ1H102A834	C 1000UF, 50V	1	
	C14932	FLL2E104A028	E 1000UF, 25V	1	
	C14934	FLL2E104A028	E 1000UF, 25V	1	
	C14936-39	FLJ1H471A836	C 470UF, 50V	4	
	C14940	FLJ1H102A834	C 1000UF, 50V	1	
	C14941,42	FLJ1H471A836	C 470UF, 50V	2	
	C14943	FLL1E4750012	C 4.7UF, 25V	1	
	C14944	FLJ1H102A836	C 1000UF, 50V	1	
	C14945	FLJ1H101A836	C 100PF, K, 50V	1	PAVCA
	C14950	FLJ1H471A836	C 470UF, 50V	1	
	C14952	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14955	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14957,58	FLJ1C1050030	C 1UF, Z, 16V	2	
	C14961	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14963	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14969	FLJ1H104A835	C 0.10UF, 50V	1	
	C14970-72	FLJ1H471A836	C 470UF, 50V	3	
	C14973	FLJ1H102A834	C 1000UF, 50V	1	
	C14974,75	FLL2E104A028	E 1000UF, 25V	2	
	C14976	FLJ1H102A834	C 1000UF, 50V	1	
	C14981	FLJ1H471A836	C 470UF, 50V	1	
	C14982-85	FLL2E104A028	E 1000UF, 25V	4	
	C14987,88	FLJ1H104A835	C 0.10UF, 50V	2	
	C14989	FLJ1H471A836	C 470UF, 50V	1	
	C14990	FLJ1H104A835	C 0.10UF, 50V	1	
	C14992	FLH1C105A008	C 1UF, K, 16V	1	
	C16003	FLL2J562A022	C 5600UF, K, 6.3V	1	
	C16011	F2A2E221A183	E 220UF, 250V	1	
	C16013	F0C2E225A230	E 0.022UF, 250V	1	
	C16014	F2A2E221A183	E 220UF, 250V	1	
	C16016	F2A2E221A183	E 220UF, 250V	1	
	C16023	FLL2J562A022	C 5600UF, K, 6.3V	1	
	C16042	FLH1H392A970	C 3900PF, K, 50V	1	
	C16071	FLL2J1020001	C 1000UF, K, 6.3V	1	
	C16092	FLL2J1020001	C 1000UF, K, 6.3V	1	
	C16131	FLL1E4750012	C 4.7UF, 25V	1	
	C16133	FLL1E4750012	C 4.7UF, 25V	1	
	C16135	FLK1E105A029	C 1UF, Z, 25V	1	
	C16151	FLK1E105A029	C 1UF, Z, 25V	1	
	C16152-54	FLL1E4750012	C 4.7UF, 25V	3	
	C16192	FLL1E4750012	C 4.7UF, 25V	1	
	C16194,95	FLL1E4750012	C 4.7UF, 25V	2	
	C16197	FLL1E4750012	C 4.7UF, 25V	1	
	C16201-03	F0C2E405A232	E 0.040UF, 250V	3	
	C16241	F2A1A101A106	E 100UF, 10V	1	
	C16242	FLH1C105A008	C 1UF, K, 16V	1	
	C16243	FLJ1H103A834	C 0.01UF, K, 50V	1	
	C16251	FLH1C105A008	C 1UF, K, 16V	1	
	C16252	FLK1E105A029	C 1UF, Z, 25V	1	
	C16262-67	F2A2A471A072	E 470UF, 100V	6	
	C16272	F2A1E471A487	E 470UF, 25V	1	
	C16280	FLK1E105A029	C 1UF, Z, 25V	1	
	C16284-87	ECJ1VB1H104K	C 0.1UF, K, 50V	4	
	C16301	F2A1E470A454	E 47UF, 25V	1	
	C16302	FLH1H471A219	E 470UF, 50V	1	
	C16310	F2A2E221A183	E 220UF, 250V	1	
	C16311	FLH1A1050032	E 10UF, 50V	1	
	C16312	FLH1H472A970	C 4700PF, K, 50V	1	
	C16313	FLH1C105A008	C 1UF, K, 16V	1	
	C16321,22	FLL2E224A028	E 2200UF, 25V	2	
	C16323	F2A1E470A454	E 47UF, 25V	1	
	C16324	F2A1E471A487	E 470UF, 25V	1	
	C16325,26	FLL1E4750012	C 4.7UF, 25V	2	
	C16327	F0C2E225A231	E 0.022UF, 250V	1	
	C16328,29	F2A2D221A092	E 220UF, 200V	2	
	C16336	FLH1H102A970	C 1000PF, K, 50V	1	
	C16337	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16403	FLL2J562A022	C 5600UF, K, 6.3V	1	
	C16413,14	F2A2E221A183	E 220UF, 250V	2	
	C16416	F0C2E225A230	E 0.022UF, 250V	1	
	C16418,19	F2A2E221A183	E 220UF, 250V	2	
	C16424	FLL2J562A022	C 5600UF, K, 6.3V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16442	F1H1H392A970	C 3900PF, K, 50V	1	
	C16471	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16472	F1K1E105A029	C 1UF, Z, 25V	1	
	C16480	F1J1H104A835	C 0.10UF, 50V	1	
	C16491	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16502	F1L1E4750012	C 4.7UF, 25V	1	
	C16504	F1L1E4750012	C 4.7UF, 25V	1	
	C16505	F1K1E105A029	C 1UF, Z, 25V	1	
	C16521	F1K1E105A029	C 1UF, Z, 25V	1	
	C16522	F1L1E4750012	C 4.7UF, 25V	1	
	C16524,25	F1L1E4750012	C 4.7UF, 25V	2	
	C16562	F1H1C105A008	C 1UF, K, 16V	1	
	C16563	F2A1A101A106	E 100UF, 10V	1	
	C16564	F1H1C105A008	C 1UF, K, 16V	1	
	C16565,66	F1J1H103A834	C 0.01UF, K, 50V	2	
	C16581	F1K1E105A029	C 1UF, Z, 25V	1	
	C16582	F1H1C105A008	C 1UF, K, 16V	1	
	C16593	F1J1H102A836	C 1000UF, 50V	1	
	C16603,04	F1K2J102A014	C 1000UF, K, 6.3V	2	
	C16605,06	F1L2J562A022	C 5600UF, K, 6.3V	2	
	C16608	F1H1H221A971	C 220UF, K, 50V	1	
	C16632-34	FOC2E405A232	E 0.040UF, 250V	3	
	C16641	ECQE2105RKB	P 1UF, 250V	1	
	C16661,62	F1K2J102A014	C 1000UF, K, 6.3V	2	
	C16664-66	F1J1H820A836	C 82UF, 50V	3	
	C16691	ECA2CM101	E 100UF, 160V	1	
	C16708	F1J1H104A835	C 0.10UF, 50V	1	
	C16721	F2A1H101A493	E 100UF, 50V	1	
	C16723-25	F1L1E4750012	C 4.7UF, 25V	3	
	C16752	F1K1E105A029	C 1UF, Z, 25V	1	
	C16753	F1L1E4750012	C 4.7UF, 25V	1	
	C16755,56	F1L1E4750012	C 4.7UF, 25V	2	
	C16773	F1L1E4750012	C 4.7UF, 25V	1	
	C16775	F1L1E4750012	C 4.7UF, 25V	1	
	C16791	F2A1E221A487	E 220UF, 25V	1	
	C16795	F2A1E471A487	E 470UF, 25V	1	
	C16797	F1J1H104A835	C 0.10UF, 50V	1	
	C16798	F1L2E1040002	E 1000UF, 25V	1	
	C16806	ECA2CM101	E 100UF, 160V	1	
	C16811	ECJ3VC1H472J	C 4700PF, J, 50V	1	
	C16813	ECA2CM101	E 100UF, 160V	1	
	C16821	F1J1H104A835	C 0.10UF, 50V	1	
	C16822	F2A2G470A018	E 470UF, 400V	1	
	C16823	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16832	F1J1H392A834	C 3900UF, 50V	1	
	C16842	ECA2CM101	E 100UF, 160V	1	
	C16843,44	F1J1H104A835	C 0.10UF, 50V	2	
	C16855	F1H1C105A008	C 1UF, K, 16V	1	
	C16856	F1H1A1050032	E 10UF, 50V	1	
	C16857	F1H1H472A970	C 4700PF, K, 50V	1	
	C16858	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16860	F1H1A1050032	E 10UF, 50V	1	
	C16861	F1H1H472A970	C 4700PF, K, 50V	1	
	C16862	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16864	F1J1H104A835	C 0.10UF, 50V	1	
	C16866	F1H1A1050032	E 10UF, 50V	1	
	C16867	F1H1H472A970	C 4700PF, K, 50V	1	
	C16868	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16869	F1J1H104A835	C 0.10UF, 50V	1	
	C17103	F1H1A1050032	E 10UF, 50V	1	
	C17106	F1H1A1050032	E 10UF, 50V	1	
	C17109	F1H1A1050032	E 10UF, 50V	1	
	C17112	F1H1A1050032	E 10UF, 50V	1	
	C17115	F1H1A1050032	E 10UF, 50V	1	
	C17118	F1H1A1050032	E 10UF, 50V	1	
	C17121,22	F1L2E154A009	E 1500UF, 25V	2	
	C17123	F1H1A1050032	E 10UF, 50V	1	
	C17124-26	F1H1C104A143	C 0.1UF, K, 16V	3	
	C17127	F1H1A1050032	E 10UF, 50V	1	
	C17130,31	F1L2E154A009	E 1500UF, 25V	2	
	C17132,33	F1H1A1050032	E 10UF, 50V	2	
	C17134,35	F1L2E154A009	E 1500UF, 25V	2	
	C17136	F1H1A1050032	E 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17137,38	F1L2E154A009	E 1500UF, 25V	2	
	C17139	F1H1A1050032	E 10UF, 50V	1	
	C17140,41	F1L2E154A009	E 1500UF, 25V	2	
	C17142	F1H1A1050032	E 10UF, 50V	1	
	C17143,44	F1L2E154A009	E 1500UF, 25V	2	
	C17145	F1H1A1050032	E 10UF, 50V	1	
	C17146,47	F1L2E154A009	E 1500UF, 25V	2	
	C17148	F1H1A1050032	E 10UF, 50V	1	
	C17149,50	F1L2E154A009	E 1500UF, 25V	2	
	C17151	F1H1A1050032	E 10UF, 50V	1	
	C17201	F1H1A1050032	E 10UF, 50V	1	
	C17204,05	F1L2E154A009	E 1500UF, 25V	2	
	C17206,07	F1H1A1050032	E 10UF, 50V	2	
	C17210,11	F1L2E154A009	E 1500UF, 25V	2	
	C17212,13	F1H1A1050032	E 10UF, 50V	2	
	C17216,17	F1L2E154A009	E 1500UF, 25V	2	
	C17218,19	F1H1A1050032	E 10UF, 50V	2	
	C17222,23	F1L2E154A009	E 1500UF, 25V	2	
	C17224,25	F1H1A1050032	E 10UF, 50V	2	
	C17228,29	F1L2E154A009	E 1500UF, 25V	2	
	C17230,31	F1H1A1050032	E 10UF, 50V	2	
	C17234,35	F1L2E154A009	E 1500UF, 25V	2	
	C17236,37	F1H1A1050032	E 10UF, 50V	2	
	C17240,41	F1L2E154A009	E 1500UF, 25V	2	
	C17242	F1H1A1050032	E 10UF, 50V	1	
	C17243	F1K2A105A006	C 1UF, 100V	1	
	C17244-47	F1H1C104A143	C 0.1UF, K, 16V	4	
	CB1-15	K1MN68BA0052	68P CONNECTOR	15	
	D3	K1KA14B00129	14P CONNECTOR	1	
	D5	K1KB31BA0064	31P CONNECTOR	1	
	D6	K1KA20AA0009	20P CONNECTOR	1	
	D20	K1MN35BA0266	35P CONNECTOR	1	
	D25	K1KA13B00069	13P CONNECTOR	1	
	D31-33	K1MN68BA0266	68P CONNECTOR	3	
	D851,52	MA2J11100L	DIODE	2	
	D856,57	MA2J11100L	DIODE	2	
	D859	B0JCME000037	DIODE	1	
	D860	MAZ81100ML	ZENER DIODE	1	
	D861	MA2J11100L	DIODE	1	
	D862	MAZ80330LL	ZENER DIODE	1	
	D1107	MA704A	DIODE	1	
	D1114,15	MA2J11100L	DIODE	2	
	D2301	MA2J11100L	DIODE	1	
	D2512	MA8043LTX	ZENER DIODE	1	
	D3005	K7AAAY000003	PHOTO LINK	1	
	D3048	MAZ81400ML	ZENER DIODE	1	
	D3051,52	MAZ81400ML	ZENER DIODE	2	
	D3063-73	MAZ81400ML	ZENER DIODE	11	
	D3076-80	MAZ81400ML	ZENER DIODE	5	
	D3085-89	MAZ81400ML	ZENER DIODE	5	
	D3701,02	MAZ81400ML	ZENER DIODE	2	
	D3709,10	MAZ80510LL	ZENER DIODE	2	
	D3711	MAZ81400ML	ZENER DIODE	1	
	D3801-06	EZAEG2A50AX	DIODE	6	
	D3807,08	EZJZ0V80008E	VARISTOR	2	
	D3809,10	EZAEG2A50AX	DIODE	2	
	D3811	EZJZ0V80008E	VARISTOR	1	
	D3813,14	B0HCMM000014	DIODE	2	
	D3815	EZJZ0V120JA	VARISTOR	1	PAVCA
	D4000	MA2J11100L	DIODE	1	
	D4002	MA2J11100L	DIODE	1	
	D4004,05	MA2J11100L	DIODE	2	
	D4006	MA3X78900L	ZENER DIODE	1	
	D4007	B0BC03900015	ZENER DIODE	1	
	D4009	MA2J11100L	DIODE	1	
	D4010	MA22D3900L	DIODE	1	
	D4502-12	EZAEG2A50AX	DIODE	11	
	D4513	MA3056MTX	ZENER DIODE	1	
	D4514	EZAEG2A50AX	DIODE	1	
	D4515	MA3056MTX	ZENER DIODE	1	
	D4516-23	EZAEG2A50AX	DIODE	8	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D4541,42	MA2J11100L	DIODE	2	
	D5400	B0JCM000037	DIODE	1	
	D5401,02	B0BC4R700007	ZENER DIODE	2	
	D5403	B0JCM000037	DIODE	1	
	D5404,05	B0BC4R700007	ZENER DIODE	2	
	D5521,22	MA3X152D0L	DIODE	2	
	D5571	B0BC6R600005	ZENER DIODE	1	
	D5573	B0BC01100001	ZENER DIODE	1	
	D5601,02	MA22D3900L	DIODE	2	
	D5603,04	B0JCDD000002	DIODE	2	
	D5605	MA22D3900L	DIODE	1	
	D5606	B0JCDD000002	DIODE	1	
	D5613-15	MA2J11100L	DIODE	3	
	D5616	MA2J72800L	ZENER DIODE	1	
	D5692	MAZ80560LL	ZENER DIODE	1	
	D9024-26	B0JCCE000008	DIODE	3	
	D9027-29	B0BC3R3A0273	ZENER DIODE	3	
	D9110	B0JCGD000002	DIODE	1	
	D9807,08	B0JCCE000008	DIODE	2	
	D9812	MA22D3900L	DIODE	1	
	D9813-15	B0JCGD000002	DIODE	3	
	D9816,17	MA22D3900L	DIODE	2	
	D14903-08	B0HCMM000013	DIODE	6	
	D14909	MA3X152E0L	ZENER DIODE	1	
	D14910	MA2J11100L	DIODE	1	
	D14911,12	B0HCMM000013	DIODE	2	
	D14953-58	B0HCMM000013	DIODE	6	
	D14961	MA8056H	ZENER DIODE	1	
	D14974	MA3X152E0L	ZENER DIODE	1	
	D14975,76	MA2J11100L	DIODE	2	
	D14977,78	B0HCMM000013	DIODE	2	
	D14979	MA2J11100L	DIODE	1	
	D16001,02	B0FBCN000005	DIODE	2	
	D16021,22	MA3DF300001W	ZENER DIODE	2	
	D16032	MA2J11100L	DIODE	1	
	D16041	MA3DF460001W	ZENER DIODE	1	
	D16043	MA3DF460001W	ZENER DIODE	1	
	D16050	B0ECKP000047	DIODE	1	
	D16051	B0FBCN000005	DIODE	1	
	D16053	B0FBCN000005	DIODE	1	
	D16102	MA22D3900L	DIODE	1	
	D16104	MA22D3900L	DIODE	1	
	D16131	B0ECHKP000003	DIODE	1	
	D16132	B0ECHKP000047	DIODE	1	
	D16151	B0ECHKP000003	DIODE	1	
	D16152,53	B0ECHKP000047	DIODE	2	
	D16191,92	B0ECHKP000047	DIODE	2	
	D16253	LNJ301MPUJA	LED	1	
	D16255	MA2J11100L	DIODE	1	
	D16280	MA2J11100L	DIODE	1	
	D16281	MAZ80510LL	ZENER DIODE	1	
	D16282	MAZ80680ML	ZENER DIODE	1	
	D16284,85	MA3X152D0L	DIODE	2	
	D16300	B0ECKP000047	DIODE	1	
	D16301	MA3X152E0L	ZENER DIODE	1	
	D16302	MA2J11100L	DIODE	1	
	D16311	MAZ81500ML	ZENER DIODE	1	
	D16313	B0ECKP000047	DIODE	1	
	D16321	B0ECKP000047	DIODE	1	
	D16324	MA3X152D0L	DIODE	1	
	D16331	B0ECHKP000003	DIODE	1	
	D16335,36	B0ECLM000006	DIODE	2	
	D16401,02	B0FBCN000005	DIODE	2	
	D16407,08	MA22D3900L	DIODE	2	
	D16421,22	MA3DF470001W	ZENER DIODE	2	
	D16451	B0ECKP000047	DIODE	1	
	D16461,62	MA3DF460001W	ZENER DIODE	2	
	D16466	MA2J11100L	DIODE	1	
	D16473	MA3X152D0L	DIODE	1	
	D16475	MAZ80510LL	ZENER DIODE	1	
	D16477	MA2J11100L	DIODE	1	
	D16478	B0HCKS000002	DIODE	1	
	D16480	MA2J11100L	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16481,82	B0FBCN000005	DIODE	2	
	D16497	B0ECKP000047	DIODE	1	
	D16501	B0ECHKP000003	DIODE	1	
	D16503	B0ECKP000047	DIODE	1	
	D16521	B0ECHKP000003	DIODE	1	
	D16522,23	B0ECKP000047	DIODE	2	
	D16583	LNJ301MPUJA	LED	1	
	D16585	MA2J11100L	DIODE	1	
	D16602	MAZ81500ML	ZENER DIODE	1	
	D16604	MA2J11100L	DIODE	1	
	D16605	MAZ80510LL	ZENER DIODE	1	
	D16606	B0ECKM000038	DIODE	1	
	D16607	MA2J11100L	DIODE	1	
	D16608	MA8120M	ZENER DIODE	1	
	D16609,10	MA2J11100L	DIODE	2	
	D16618,19	B0ECKP000047	DIODE	2	
	D16631-35	MAZ81300ML	ZENER DIODE	5	
	D16642	B0HCKS000002	DIODE	1	
	D16643	MA2J11100L	DIODE	1	
	D16645	MA2J11100L	DIODE	1	
	D16659	B0HCMM000014	DIODE	1	
	D16661	MA2J11100L	DIODE	1	
	D16662-64	MAZ81500ML	ZENER DIODE	3	
	D16665	MAZ80510LL	ZENER DIODE	1	
	D16667	MA2J11100L	DIODE	1	
	D16668	MA3X152D0L	DIODE	1	
	D16669	MA2J11100L	DIODE	1	
	D16671	MA2J11100L	DIODE	1	
	D16710	MAZ81500ML	ZENER DIODE	1	
	D16711	B0HCMR000002	DIODE	1	
	D16712	MAZ81500ML	ZENER DIODE	1	
	D16713	B0HCMR000002	DIODE	1	
	D16714	MAZ81500ML	ZENER DIODE	1	
	D16715	B0HCMR000002	DIODE	1	
	D16717	MA8330M	ZENER DIODE	1	
	D16718	MA2J11100L	DIODE	1	
	D16719,20	B0ECKP000047	DIODE	2	
	D16721	B0HCKS000002	DIODE	1	
	D16722	MA2J11100L	DIODE	1	
	D16725	MA2J11100L	DIODE	1	
	D16761,62	MA2J11100L	DIODE	2	
	D16763	B0ECKP000047	DIODE	1	
	D16764	B0HCKS000002	DIODE	1	
	D16765,66	B0ECKP000047	DIODE	2	
	D16771	MAZ80510LL	ZENER DIODE	1	
	D16791	MAZ82000ML	ZENER DIODE	1	
	D16792	MA2J11100L	DIODE	1	
	D16793	B0HCKS000002	DIODE	1	
	D16794	MA2J11100L	DIODE	1	
	D16820	MA3X152E0L	ZENER DIODE	1	
	D16821	MAZ82000ML	ZENER DIODE	1	
	D16822	MA2J11100L	DIODE	1	
	D16824,25	MA8330M	ZENER DIODE	2	
	D16830	MA8056H	ZENER DIODE	1	
	D16836	MAZ81500ML	ZENER DIODE	1	
	D16837	MA2J11100L	DIODE	1	
	D16838	B0BC027A0234	ZENER DIODE	1	
	D16839	B0ECKP000047	DIODE	1	
	D16859,60	B0HCKS000002	DIODE	2	
	D16861,62	MA8330M	ZENER DIODE	2	
	D16871	MAZ82000ML	ZENER DIODE	1	
	D16872	MA2J11100L	DIODE	1	
	D16873	MAZ82000ML	ZENER DIODE	1	
	D16874	MAZ80510LL	ZENER DIODE	1	
	D16875	MA2J11100L	DIODE	1	
	D2520A	B3AAA0000770	LED	1	
	FL3710-12	JOZZA0000091	FILTER	3	PAVCA
	FL3802-05	JOMAB0000170	LC FILTER	4	
	FL4000	JOHAA0000036	LC FILTER	1	
	FL4003,04	JOHAA0000036	LC FILTER	2	
	FL4206-11	JOJAD0000028	CHIP INDUCTOR	6	
	FL8500,01	JOHAAA0000013	LC FILTER	2	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	FL9803	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL9805,06	F1J1E104A148	C 0.10UF, Z, 25V	2	
	G51	K1KA11BA0062	11P CONNECTOR	1	
	GH10	K1FY121E0001	CONNECTOR	1	PAVCA
	GH11	K1KA30AA0009	30P CONNECTOR	1	
	G852	K1KA12A00317	12P CONNECTOR	1	
	IC850	C0DBAZF00003	IC	1	
	IC1100	MNZSFG3GP53	IC	1	
	IC1101	TVRP920S	IC	1	PAVCA
	IC2008	C0CBCBE00001	IC	1	
	IC2106	C1AB00002908	IC	1	
	IC2107	C0DBFFD00003	IC	1	
	IC2301	C1AB00002875	IC	1	
	IC3001	C1AB00002855	IC	1	
	IC3017	C0EBM0000026	IC	1	
	IC3801	C1AB00002835	IC	1	PAVCA
	IC3802	TVRP820S	IC	1	PAVCA
	IC4000	C1AB00002877	IC	1	
	IC4013	C0JBAZ002060	IC	1	
	IC4200	C0ZBZ0001568	IC	1	PAVCA
	IC4510	C1AB00002966	IC	1	
	IC4511	C0CBCBE00001	IC	1	
	IC4512,13	C0DBGYY00477	IC	2	
	IC4800	C1ZBZ0003775	IC	1	
	IC5400,01	C0DBAYY00183	IC	2	
	IC5600	C0DBAYY00273	IC	1	
	IC5601	C0DBAYY00274	IC	1	
	IC5606	C0EBF0000354	IC	1	
	IC8001	MN2WS0047	IC	1	PAVCA
	IC8002,03	C3ABSG000052	IC	2	
	IC8004	C0ZBZ0001030	IC	1	
	IC8300	MN884350	IC	1	PAVCA
	IC8502	TVRP753S	IC	1	PAVCA
	IC8503	TVRP757S	IC	1	PAVCA
	IC9001	TVRP927S	IC	1	PAVCA
	IC9002	C1ZBZ0003577	IC	1	
	IC9003	MNZSFG4GPF1	IC	1	PAVCA
	IC9011	C0EBF0000431	IC	1	
	IC9013	C0JBAZ002060	IC	1	
	IC9019	C0JBAZ001120	IC	1	
	IC9300	MN84526	IC	1	
	IC9301	C3ABQJ000055	IC	1	
	IC9303	TVRP928S	IC	1	PAVCA
	IC9400	MN84526	IC	1	
	IC9401	C3ABQJ000055	IC	1	
	IC9500	C1ZBZ0003760	IC	1	
	IC9802,03	C0JBAZ001120	IC	2	
	IC9805	C0DBAYY00274	IC	1	
	IC9806	C0DBAYY00273	IC	1	
	IC14901-08	AN16182A-VT	IC	8	
	IC14951-58	AN16182A-VT	IC	8	
	IC14961,62	C0JBAZ000994	IC	2	
	IC14963	C0JBAA000321	IC	1	
	IC14964	C0JBAA000174	IC	1	
	IC14965	C0JBAA000321	IC	1	
	IC16131	C0ZBZ0000895	IC	1	
	IC16151	C0ZBZ0001324	IC	1	
	IC16191	C0ZBZ0000895	IC	1	
	IC16241	C0JBAZ002811	IC	1	
	IC16251	C0BBBA000024	IC	1	
	IC16301	MIP9L02MBS	IC	1	
	IC16302	C0CBALC00012	IC	1	
	IC16303	C0JBAC000363	IC	1	
	IC16471	C0DBEKA00003	IC	1	
	IC16472	C0JBAA000377	IC	1	
	IC16501	C0ZBZ0000895	IC	1	
	IC16521	C0ZBZ0001324	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC16561-63	C0JBAZ002811	IC	3	
	IC16564	C0JBAB0000715	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16724,25	C0CBADC00072	IC	2	
	IC16752	C0ZBZ0001324	IC	1	
	IC16772	C0ZBZ0001325	IC	1	
	IC16784	MIP9L02MBS	IC	1	
	IC16786	MIP9L02MBS	IC	1	
	IC16788	MIP9L02MBS	IC	1	
	IC16789	C0DBEYY00078	IC	1	
	IC16791	EHMDD9878	LINEAR IC	1	
	IC16792	C0JBAA000377	IC	1	
	IC16801	C0DBEYY00078	IC	1	
	IC17101-03	C0JBAZ001120	IC	3	
	IC17201-04	C0JBAZ001120	IC	4	
	JA1	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA1	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA2	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA2	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA3	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA4	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA4,A5	ERJ6GEY0R00V	M 0 OHM J 1/10W	2	
	JK3000A	K1U929A00001	CONNECTOR	1	PAVCA
	JK3701	K4AK13B00002	TERMINAL BOARD	1	PAVCA
	JK4500,01	K1FY119D0003	CONNECTOR	2	PAVCA
	JK7701	K1NA09E00080	9P CONNECTOR	1	
	JS2088	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS2300	DOYAR0000007	M 0 OHM 1/4W	1	
	JS3051-56	D0GDR00Z0002	M 0 OHM, 1/10W	6	
	JS3058	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS4010	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS4019	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS7701	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	K1	K1KA08BA0061	8P CONNECTOR	1	
	L852	G0C101KA0167	PEAKING COIL	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L2022	J0JHC0000078	CHIP INDUCTOR	1	
	L2029	J0JCC0000059	CHIP INDUCTOR	1	
	L2038	J0JYC0000068	CHIP INDUCTOR	1	
	L2041	J0JYC0000068	CHIP INDUCTOR	1	
	L2300	G1C220MA0291	INDUCTION COIL	1	
	L2302	G1C220MA0291	INDUCTION COIL	1	
	L2304	G1C220MA0291	INDUCTION COIL	1	
	L2306	G1C220MA0291	INDUCTION COIL	1	
	L3000,01	J0JYC0000068	CHIP INDUCTOR	2	
	L3512	J0JHC0000042	CHIP INDUCTOR	1	
	L3801	J0JHC0000078	CHIP INDUCTOR	1	
	L3804,05	J0JHC0000078	CHIP INDUCTOR	2	
	L4000	G1C470MA0291	INDUCTION COIL	1	
	L4001	G1C100MA0072	INDUCTION COIL	1	
	L4002	J0JYC0000068	CHIP INDUCTOR	1	
	L4201,02	J0JHC0000078	CHIP INDUCTOR	2	
	L4500-07	J0JHC0000078	CHIP INDUCTOR	8	
	L4510,11	J0JHC0000078	CHIP INDUCTOR	2	
	L4512,13	J0JCC0000241	CHIP INDUCTOR	2	
	L4514-19	J0JYC0000068	CHIP INDUCTOR	6	
	L4600	J0JHC0000045	CHIP INDUCTOR	1	
	L5401	G1C330M00027	INDUCTION COIL	1	PAVCA
	L5405	G1C330M00027	INDUCTION COIL	1	PAVCA
	L5600,01	G1C2R2Z00007	INDUCTION COIL	2	
	L5602	G1C4R7Z00014	INDUCTION COIL	1	
	L5604	G1C100MA0203	INDUCTION COIL	1	
	L5605	J0JHC0000075	CHIP INDUCTOR	1	
	L5606	G1C100MA0203	INDUCTION COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L7721	J0JCC0000143	CHIP INDUCTOR	1	
	L8001-05	J0JHC0000045	CHIP INDUCTOR	5	
	L8006	D0GBR0020002	M 0 OHM J 1/16W	1	
	L8007-10	J0JHC0000045	CHIP INDUCTOR	4	
	L8301-03	J0JHC0000045	CHIP INDUCTOR	3	
	L8304,05	G1CR22JA0020	INDUCTION COIL	2	
	L8306	G1CR39JA0020	INDUCTION COIL	1	PAVCA
	L8307-10	J0JHC0000045	CHIP INDUCTOR	4	
	L8311,12	G1CR39JA0020	INDUCTION COIL	2	PAVCA
	L8500	J0JHC0000075	CHIP INDUCTOR	1	
	L8507	J0JHC0000045	CHIP INDUCTOR	1	
	L9000-07	J0JHC0000078	CHIP INDUCTOR	8	
	L9800	G1C2R2Z00007	INDUCTION COIL	1	
	L9801	G1C1R5Z00006	INDUCTION COIL	1	
	L9802	G1C2R2Z00007	INDUCTION COIL	1	
	L16001-05	G0C2R1KA0190	PEAKING COIL	5	
	L16011-15	G0C2R1KA0190	PEAKING COIL	5	
	L16102	J0JJC0000015	CHIP INDUCTOR	1	
	L16103	G0ZZ00002183	PEAKING COIL	1	
	L16104	J0JJC0000015	CHIP INDUCTOR	1	
	L16221	G0ZZ00002183	PEAKING COIL	1	
	L16262	G0ZZ00002183	PEAKING COIL	1	
	L16271	G0ZZ00002183	PEAKING COIL	1	
	L16301	J0JHC0000031	CHIP INDUCTOR	1	
	L16398,99	J0JJC0000015	CHIP INDUCTOR	2	
	L16401	G0C2R1KA0190	PEAKING COIL	1	
	L16403-06	G0C2R1KA0190	PEAKING COIL	4	
	L16411	G0C2R1KA0190	PEAKING COIL	1	
	L16413-16	G0C2R1KA0190	PEAKING COIL	4	
	L16472	G0ZZ00002183	PEAKING COIL	1	
	L16591	G0ZZ00002183	PEAKING COIL	1	
	L16697	G0C102KA0187	PEAKING COIL	1	
	L16698	G0C681KA0187	PEAKING COIL	1	
	L16699	G0C331KA0187	PEAKING COIL	1	
	L16801	G0ZZ00002183	PEAKING COIL	1	
	PA5600	K5H5022A0023	FUSE	1	
	PA9800	K5H4022A0031	FUSE	1	
	PA9900	K5H5022A0031	FUSE	1	
	PB30	K1KA05AA0193	5P CONNECTOR	1	
	PB31,32	K1KA03AA0192	3P CONNECTOR	2	
	PB36,37	K1KA03AA0192	3P CONNECTOR	2	
	Q16141	B1HFFPA00001	TRANSISTOR	1	
	Q16161	B1HFFPA00001	TRANSISTOR	1	
	Q16171	B1ABRD000003	TRANSISTOR	1	
	Q16172	B1ABRD000001	TRANSISTOR	1	
	Q16181	B1ABRD000003	TRANSISTOR	1	
	Q16182	B1ABRD000001	TRANSISTOR	1	
	Q16191	B1HFFPA00001	TRANSISTOR	1	
	Q16251	2SD0601ARL	TRANSISTOR	1	
	Q16280	2SD0601ARL	TRANSISTOR	1	
	Q16301	B1CBGD000001	FET	1	
	Q16302	B1CFNG000001	FET	1	
	Q16304	2SB0709ARL	TRANSISTOR	1	
	Q16331	B1CERL000012	FET	1	
	Q16335	B1CERL000012	FET	1	
	Q16339	2SK399500L	FET	1	
	Q16401	B1JAEN000002	TRANSISTOR	1	
	Q16403,04	B1JAEN000002	TRANSISTOR	2	
	Q16421	2PG0060A00RP	TRANSISTOR	1	
	PC14953	B3PBA0000456	IC	1	
	PC16480	B3PBA0000223	IC	1	
	PC16601	B3PBA0000223	IC	1	
	PC16602	B3PBA0000443	IC	1	
	PC16603	B3PBA0000223	IC	1	
	PC16705	B3PBA0000456	IC	1	
	PC16710	B3PBA0000223	IC	1	
	PC16896,97	B3PBA0000223	IC	2	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
△	PCB	ETX2MM702MFN	CIRCUIT BOARD P	1	PAVCA
△	PCB	TNPH0721ADS	CIRCUIT BOARD A	1	PAVCA
△	PCB	TXNC11RLTU	CIRCUIT BOARD C1	1	PAVCA
△	PCB	TXNC21RLTU	CIRCUIT BOARD C2	1	PAVCA
△	PCB	TNPA4243ADS	CIRCUIT BOARD PB	1	PAVCA
△	PCB	TNPA4439ALS	CIRCUIT BOARD D	1	PAVCA
△	PCB	TXNSC1RLTUS	CIRCUIT BOARD SC	1	PAVCA
△	PCB	TXNSD1RLTU	CIRCUIT BOARD SD	1	PAVCA
△	PCB	TXNSU1RLTU	CIRCUIT BOARD SU	1	PAVCA
△	PCB	TXNSS1RLTU	CIRCUIT BOARD SS	1	PAVCA
△	PCB	TNPA4501S	CIRCUIT BOARD G	1	PAVCA
△	PCB	TNPA4603ABS	CIRCUIT BOARD GH	1	PAVCA
△	PCB	TNPA4139ADS	CIRCUIT BOARD GS	1	PAVCA
△	PCB	TNPA4500S	CIRCUIT BOARD K	1	PAVCA
△	PCB	TNPA4499S	CIRCUIT BOARD S	1	PAVCA
	Q2041,42	2SD0601ARL	TRANSISTOR	2	
	Q2301	2SB0709ARL	TRANSISTOR	1	
	Q2510,11	2SD0601ARL	TRANSISTOR	2	
	Q3123,24	2SD0601ARL	TRANSISTOR	2	
	Q3125	2SB0709ARL	TRANSISTOR	1	
	Q3801,02	2SD0601ARL	TRANSISTOR	2	
	Q3804	2SD0601ARL	TRANSISTOR	1	
	Q4014,15	2SD0601ARL	TRANSISTOR	2	
	Q4016	B1CFNG000001	FET	1	
	Q4017	2SD0601ASL	TRANSISTOR	1	
	Q4502,03	2SD0601ARL	TRANSISTOR	2	
	Q4514-17	2SB0709ARL	TRANSISTOR	4	
	Q4522,23	2SD0601ARL	TRANSISTOR	2	
	Q4528-31	2SB0709ARL	TRANSISTOR	4	
	Q5522	2SB0709ARL	TRANSISTOR	1	
	Q5600	B1MBEDA00015	FET	1	
	Q5601,02	B1MBDDA00003	FET	2	
	Q5603,04	2SD0601ARL	TRANSISTOR	2	
	Q5684	2SB0709ARL	TRANSISTOR	1	
	Q8300	2SB0709ARL	TRANSISTOR	1	
	Q9010	2SD0601ARL	TRANSISTOR	1	
	Q9058-61	2SD0601ARL	TRANSISTOR	4	
	Q9805,06	2SD0601ARL	TRANSISTOR	2	
	Q9807	B1MBDDA00003	FET	1	
	Q9808	B1MBDDA00015	FET	1	
	Q9809	B1MBDDA00003	FET	1	
	Q16002-04	2PG0060000RP	TRANSISTOR	3	
	Q16021-24	B1JAEP000002	TRANSISTOR	4	
	Q16042	B1JAEN000003	TRANSISTOR	1	
	Q16051	B1JAEN000003	TRANSISTOR	1	
	Q16102	2SK399800L	FET	1	
	Q16104	2SK399800L	FET	1	
	Q16452	B1JAEP000003	TRANSISTOR	1	
	Q16471	B1ABCF000231	TRANSISTOR	1	
	Q16501	B1HFFPA00001	TRANSISTOR	1	
	Q16521	B1HFFPA00001	TRANSISTOR	1	
	Q16531	B1ABRD000003	TRANSISTOR	1	
	Q16532	B1ABRD000001	TRANSISTOR	1	
	Q16551	B1ABRD000003	TRANSISTOR	1	
	Q16552	B1ABRD000001	TRANSISTOR	1	
	Q16581	B1ABCF000231	TRANSISTOR	1	
	Q16601	B1DEET000002	FET	1	
	Q16602	2SD0601AQL	TRANSISTOR	1	
	Q16603	2SB0709ARL	TRANSISTOR	1	
	Q16604	B1CHPM000001	FET	1	
	Q16605	2SB0709ARL	TRANSISTOR	1	
	Q16606	2SD0601AQL	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16608	B1ABCF000231	TRANSISTOR	1	
	Q16622-25	B1CFRM000008	FET	4	
	Q16627-29	B1CFRM000008	FET	3	
	Q16634	B1CFRM000008	FET	1	
	Q16641-44	2SK4175000LZ	FET	4	
	Q16647-50	2SK4175000LZ	FET	4	
	Q16661	B1JAER000004	TRANSISTOR	1	
	Q16662	2SD0601AQL	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16663	2SB0709ARL	TRANSISTOR	1	
	Q16664	B1HFFFA00001	TRANSISTOR	1	
	Q16665	B1ABCF000231	TRANSISTOR	1	
	Q16743	2SD0601ARL	TRANSISTOR	1	
	Q16762,63	B1ADNF000006	TRANSISTOR	2	
	Q16781	B1HFFFA00001	TRANSISTOR	1	
	Q16783	B1HFFFA00001	TRANSISTOR	1	
	Q16791	2SD0814A0L	TRANSISTOR	1	PAVCA
	Q16794	B1ADCE000022	TRANSISTOR	1	
	Q16795	2SD0601ARL	TRANSISTOR	1	
	Q16796	2SC1473ARA	TRANSISTOR	1	PAVCA
	Q16801,02	B1ADCN000007	TRANSISTOR	2	
	Q16805	2SC3063000RL	TRANSISTOR	1	
	Q16806	2SC1473AEA	TRANSISTOR	1	
	Q16810-12	B1ABCF000231	TRANSISTOR	3	
	Q16814,15	B1ABCN000007	TRANSISTOR	2	
	Q16816,17	2SD0601AQL	TRANSISTOR	2	
	Q16872	2SB0709ARL	TRANSISTOR	1	
	Q16873	B1ABCF000231	TRANSISTOR	1	
	Q16874	B1CBGD000001	FET	1	
	Q16875,76	B1ABCF000231	TRANSISTOR	2	
	Q16879	B1ABCF000231	TRANSISTOR	1	
	R851,52	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	2	
	R856,57	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	2	
	R859	ERJ6ENF2001V	M 2KOHM, 1/10W	1	
	R861	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R867	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R869	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R871	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R872	ERJ6ENF8450	M 845 OHM, 1/10W	1	
	R874	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R1124,25	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
	R1139,40	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
	R1143	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1145	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R1148-54	ERJ2GEJ473	M 47KOHM, J,0.063W	7	
	R1157	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1160,61	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
	R1162	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1169	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1170	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1171	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1172	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1174,75	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
	R1182	ERJ2GED273X	M 27KOHM, J,0.063W	1	
	R1183,84	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
	R1188	D0YAR0000007	M 0 OHM 1/4W	1	
	R1194	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1196	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1198	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R1199	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1200,01	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1203	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1205,06	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
	R1209,10	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
	R1216	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1218-20	ERJ2GEJ473	M 47KOHM, J,0.063W	3	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R1223	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2058	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2059	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2060	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R2100	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2104	D1BB2001A055	M 2KOHM, 1/10W	1	
	R2110	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2111	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2113	D1BB1203A055	M 120KOHM, 1/10W	1	
	R2114	D1BB7502A055	M 75KOHM, 1/10W	1	
	R2115-17	ERJ2GEJ103	M 10KOHM, J,0.063W	3	
	R2138	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2150,51	D1BB2802A055	M 28KOHM, 1/10W	2	
	R2152	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2162,63	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R2164	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2271	EXB28V220J	RESISTOR ARRAY	1	
	R2301,02	ERJ2GEJ222	M 2.2KOHM, J,0.063W	2	
	R2305	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2308	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2310	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2311	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2313	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2315	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2325	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2330	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
	R2331	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R2516	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2517	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R2520	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R2524	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2525	D1BB8200A055	M 820 OHM, 1/10W	1	PAVCA
	R2542	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2557	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
	R3058-60	ERJ2GEJ221	M 220 OHM, J,0.063W	3	
	R3061	D1BB75R0A055	M 75 OHM, 1/10W	1	PAVCA
	R3062,63	ERJ2GEJ221	M 220 OHM, J,0.063W	2	
	R3064	D1BB75R0A055	M 75 OHM, 1/10W	1	PAVCA
	R3065	ERJ2GEJ102X	M 1K OHM J 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3066	D1BB75R0A055	M 75 OHM, 1/10W	1	PAVCA
	R3067,68	ERJ2GEJ221	M 220 OHM, J,0.063W	2	
	R3070	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3071	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3076	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3077-90	ERJ2GEJ221	M 220 OHM, J,0.063W	14	
	R3095-99	ERJ2GEJ680	M 68 OHM, J,0.063W	5	
	R3107	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3123,24	ERJ2GEJ182	M 1.8KOHM, J,0.063W	2	
	R3145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3146	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R3147	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3148	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R3149,50	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
	R3151	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R3152	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3153	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3154	ERJ2GEJ274	M 270KOHM, J,0.063W	1	
	R3189	D1BB75R0A055	M 75 OHM, 1/10W	1	PAVCA
	R3190-93	D0GB393JA041	M 39KOHM, J,1/16W	4	
	R3194	D1BB75R0A055	M 75 OHM, 1/10W	1	PAVCA
	R3198,99	D1BB75R0A055	M 75 OHM, 1/10W	2	PAVCA
	R3202	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3203	D1BB75R0A055	M 75 OHM, 1/10W	1	PAVCA
	R3204	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3208,09	D1BB75R0A055	M 75 OHM, 1/10W	2	PAVCA
	R3211,12	D1BB75R0A055	M 75 OHM, 1/10W	2	PAVCA
	R3716,17	ERJ6GEYJ393V	M 39KOHM, J,1/10W	2	
	R3721	D0GD103JA036	M 10KOHM, J,0.25W	1	
	R3750	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R3751	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
	R3752	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
	R3753	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
	R3754	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
	R3756	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3758	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
	R3801,02	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R3803	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R3804,05	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
	R3806	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3807,08	ERJ2GEJ100	M 10 OHM, J,0.063W	2	
	R3809,10	ERJ2GEJ102X	M 1K OHM J 1/4W	2	
	R3811	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R3812	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3814	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3815	D0YAR0000007	M 0 OHM 1/4W	1	
	R3818	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3821	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R3822	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3832	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3834	D1BB49R90002	M 49 OHM, 1/10W	1	PAVCA
	R3840,41	ERJ2GEJ100	M 10 OHM, J,0.063W	2	
	R3845	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3847	D0YAR0000007	M 0 OHM 1/4W	1	
	R3854	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4079	EXB2HV560JV	D1HG5608A002	1	
	R4081	EXB2HV560JV	D1HG5608A002	1	
	R4089-91	EXB2HV560JV	D1HG5608A002	3	
	R4112	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R4113	ERJ6GEYJ681	M 680 OHM, J,1/10W	1	
	R4115	D1BB1003A055	M 100KOHM, 1/10W	1	PAVCA
	R4116	D1BB3401A055	M 3.4KOHM, 1/10W	1	PAVCA
	R4117	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R4122	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4123-33	ERJ2GEJ220	M 22 OHM, J,0.063W	11	
	R4134-36	ERJ2GEJ331	M 330 OHM, J,0.063W	3	
	R4137	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4138-40	ERJ2GEJ220	M 22 OHM, J,0.063W	3	
	R4153	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4155	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4158	ERJ3GEYD153V	M 15KOHM, J,1/16W	1	
	R4162	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4166	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4167	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4168	EXB2HV473JV	RESISTOR ARRAY	1	
	R4170,71	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
	R4286-88	ERJ2GEJ473	M 47KOHM, J,0.063W	3	
	R4289-94	EXB28V470JX	RESISTOR ARRAY	6	
	R4295-02	ERJ2GEJ470	M 47 OHM, J,0.063W	8	
	R4303	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4304,05	ERJ2GEJ470	M 47 OHM, J,0.063W	2	
	R4309	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4327	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4330	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4502,03	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R4524	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4526,27	ERJ2GEJ102X	M 1K OHM J 1/4W	2	
	R4528	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4538	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4540	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4548-50	ERJ2GEJ103	M 10KOHM, J,0.063W	3	
	R4552	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4568	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4571,72	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
	R4587	D1BB60400001	M 604 OHM, 1/10W	1	
	R4588,89	D1BB8060A055	M 806 OHM, 1/10W	2	
	R4590,91	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R4592	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4593	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R4596-98	ERJ6GEYJ102V	M 1K OHM J 1/10W	3	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4600	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4601	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4603,04	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
	R4606	D1BB9101A055	M 9.1KOHM, 1/10W	1	
	R4609,10	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
	R4611	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R4613	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4620	D0YAR0000007	M 0 OHM 1/4W	1	
	R4622	D0YAR0000007	M 0 OHM 1/4W	1	
	R4624,25	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R4626,27	D1BB2200A055	M 220 OHM, 1/10W	2	
	R4630	D0YAR0000007	M 0 OHM 1/4W	1	
	R4631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R4632	D0YAR0000007	M 0 OHM 1/4W	1	
	R4634	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4635	EXB28V680JX	RESISTOR ARRAY	1	
	R4636-38	ERJ2GEJ680	M 68 OHM, J,0.063W	3	
	R4639,40	EXB28V680JX	RESISTOR ARRAY	2	
	R4641	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4643	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4645,46	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
	R4648	EXB28V330J	RESISTOR ARRAY	1	
	R4649	EXB28V680JX	RESISTOR ARRAY	1	
	R4650,51	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
	R4652	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4665,66	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
	R4670	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4678,79	EXB28V680JX	RESISTOR ARRAY	2	
	R4698,99	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
	R4700-06	ERJ2GEJ473	M 47KOHM, J,0.063W	7	
	R4736	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4737,38	ERJ2GEJ102X	M 1K OHM J 1/4W	2	
	R4739,40	ERJ2GEJ104	M 100KOHM, J,0.063W	2	
	R4741	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4821	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5058	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5069	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5137	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5188	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R5400	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5401	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5402	D1BB4532A055	M4.53KOHM, 1/10W	1	
	R5403	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5405	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5406	ERJ2GEJ203X	D0GA203JA015	1	
	R5407	D1BB8872A055	M8.87KOHM, 1/10W	1	
	R5408	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5535	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5536	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5537	ERJ2GEJ152	M 1.5KOHM, J,0.063W	1	
	R5538	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5540	ERJ6GEYJ471	M 470 OHM, J,1/10W	1	
	R5542	ERJ6GEYJ471	M 470 OHM, J,1/10W	1	
	R5544	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5600	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5604	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5605	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R5606,07	D0YAR0000007	M 0 OHM 1/4W	2	
	R5610	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5611	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5612	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5620	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5621	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5622	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5623	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5625-28	D0YAR0000007	M 0 OHM 1/4W	4	
	R5629	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5630	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5631	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5632	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5633	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5634	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5635	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R5636	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R5637	D0YAR0000007	M 0 OHM 1/4W	1	
	R5638	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5641	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5644	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5646	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5647	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5648	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5650,51	ERJ2GED563X	M 56KOHM, J,0.063W	2	
	R5652	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5662	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5664	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R5665	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5666	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R5667	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5747	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5748	ERJ2GEJ123	M 12KOHM, J,0.063W	1	
	R5749	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5762	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R7701	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R7702	D0YAR0000007	M 0 OHM 1/4W	1	
	R7703-05	ERJ2GEJ680	M 68 OHM, J,0.063W	3	
	R7706	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7708	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7709	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R7710	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R7713	D0YAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R7716	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7731	D0YAR0000007	M 0 OHM 1/4W	1	
	R7792-99	D0GBR00Z0002	M 0 OHM J 1/16W	8	
	R8001	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8002	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8004	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8005	D1BB1002A055	M 10KOHM, 1/10W	1	
	R8006	D1BB6801A055	M 6.8KOHM, 1/10W	1	
	R8030	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8031,32	D1BB2700A055	M 270 OHM, 1/10W	2	
	R8035	D0YAR0000007	M 0 OHM 1/4W	1	
	R8056-73	ERJ2GEJ470	M 47 OHM, J,0.063W	18	
	R8074	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8075-78	ERJ2GEJ470	M 47 OHM, J,0.063W	4	
	R8081	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8082	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R8083	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R8086	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8087	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8090	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8091	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8093	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8094	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8097	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8098,99	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R8100	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8106	ERJ2GEJ202	M 2KOHM, J,0.063W	1	
	R8107	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8112	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8302,03	ERJ2GEJ470	M 47 OHM, J,0.063W	2	
	R8304	D0YAR0000007	M 0 OHM 1/4W	1	
	R8305,06	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
	R8307,08	ERJ2GEJ562	M 5.6KOHM, J,0.063W	2	
	R8309	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8311	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8313	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R8314	D1BB1202A055	M 12KOHM, 1/10W	1	PAVCA
	R8315	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8316,17	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R8318-20	ERJ2GEJ220	M 22 OHM, J,0.063W	3	
	R8321	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8323	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8324-27	ERJ2GEJ470	M 47 OHM, J,0.063W	4	
	R8331	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8333,34	ERJ2GEJ473	M 47KOHM, J,0.063W	2	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8335	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8336	J0JCC0000364	CHIP INDUCTOR	1	
	R8502	D0YAR0000007	M 0 OHM 1/4W	1	
	R8504	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8512	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8517	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8519,20	ERJ2RKD330	M 33 OHM, J, 2W	2	
	R8528-30	ERJ2GEJ560X	M 56 OHM, J,0.063W	3	
	R8532	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8533	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8538-45	ERJ2GEJ220	M 22 OHM, J,0.063W	8	
	R8546-48	ERJ2GEJ332	M 3.3KOHM, J,0.063W	3	
	R8550	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8552,53	ERJ2GEJ182	M 1.8KOHM, J,0.063W	2	
	R8554,55	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
	R8556	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8557,58	ERJ2GEJ332	M 3.3KOHM, J,0.063W	2	
	R8561	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8562-65	ERJ2GEJ103	M 10KOHM, J,0.063W	4	
	R8566	EXB28V103JX	RESISTOR ARRAY	1	
	R8570	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8573	EXB28V680JX	RESISTOR ARRAY	1	
	R8574	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8575	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8661	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8663	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8721,22	ERJ2GEJ560X	M 56 OHM, J,0.063W	2	
	R8765	ERJ2GEJ750X	M 75 OHM, J,0.063W	1	PAVCA
	R8767	ERJ2GEJ750X	M 75 OHM, J,0.063W	1	PAVCA
	R8769	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8770	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8772	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8793	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8844	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8866	D1BB91R0A055	M 91 OHM, 1/10W	1	PAVCA
	R8898	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9101	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9103	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9105	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9107	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9110	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9112-14	ERJ2GEJ470	M 47 OHM, J,0.063W	3	
	R9115,16	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
	R9117	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9118	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9119	EXB38V470JV	RESISTOR ARRAY	1	PAVCA
	R9120	EXB2HV103JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9121	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9122	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9123	EXB2HV470JV	RESISTOR ARRAY	1	
	R9124	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9125	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9126	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9127	D0YAR0000007	M 0 OHM 1/4W	1	
	R9129	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R9130	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9131,32	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
	R9133	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9134	D0YAR0000007	M 0 OHM 1/4W	1	
	R9135	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9136	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9137-40	EXB2HV220JV	RESISTOR ARRAY	4	
	R9141	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9142,43	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
	R9145	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9146,47	EXB2HV220JV	RESISTOR ARRAY	2	
	R9148	EXB38VR000V	RESISTOR ARRAY	1	
	R9149	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9150,51	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	R9154	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9155	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9157	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9158	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9159-61	ERJ2GEJ393	M 39KOHM, J,0.063W	3	
	R9162	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9163	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9164	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9166	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9167	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9168	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9170	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9171	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9172	D0YAR0000007	M 0 OHM 1/4W	1	
	R9174	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9175	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9177-82	ERJ2GEJ220	M 22 OHM, J,0.063W	6	
	R9185	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R9186	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R9187	ERJ2GED563X	M 56KOHM, J,0.063W	1	
	R9188	ERJ2GEJ243	M 24KOHM, J,0.063W	1	
	R9189	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9190	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9191	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9192	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9193	EXB2HV220JV	RESISTOR ARRAY	1	
	R9194	D0YAR0000007	M 0 OHM 1/4W	1	
	R9195	EXB2HV220JV	RESISTOR ARRAY	1	
	R9196	D0YAR0000007	M 0 OHM 1/4W	1	
	R9197	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9198	D0YAR0000007	M 0 OHM 1/4W	1	
	R9199	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9200,01	ERJ2GEJ100	M 10 OHM, J,0.063W	2	
	R9202	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9204	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R9205	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R9206	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9207	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9208-11	EXB2HV220JV	RESISTOR ARRAY	4	
	R9212	EXB2HV470JV	RESISTOR ARRAY	1	
	R9213	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9214	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9215	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9216	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9217	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9218	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9219	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9223	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R9224	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9225	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R9226	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9229	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9230	EXB38V470JV	RESISTOR ARRAY	1	PAVCA
	R9231	D0YAR0000007	M 0 OHM 1/4W	1	
	R9232	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9233	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9234,35	EXB2HV470JV	RESISTOR ARRAY	2	
	R9236	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9237	EXB38V470JV	RESISTOR ARRAY	1	PAVCA
	R9238	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R9245	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9246	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9247	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9248-51	D1BB1001A055	M 1KOHM, 1/16W	4	
	R9252	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9253-55	EXB2HV103JV	RESISTOR ARRAY	3	
	R9256-63	EXB38V470JV	RESISTOR ARRAY	8	PAVCA
	R9264-67	ERJ2GEJ470	M 47 OHM, J,0.063W	4	
	R9270,71	ERJ2GEJ470	M 47 OHM, J,0.063W	2	
	R9272	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9273	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9274-77	EXB2HV151J	RESISTOR ARRAY	4	
	R9279	D0YAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9280-82	EXB2HV103JV	RESISTOR ARRAY	3	
	R9283	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9286-88	D0YAR0000007	M 0 OHM 1/4W	3	
	R9292	EXB2HVR000	RESISTOR ARRAY	1	
	R9293	EXB2HV470JV	RESISTOR ARRAY	1	
	R9295-04	ERJ2GEJ101	M 100 OHM, J,0.063W	10	
	R9308	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9309	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9310	EXB38V103JV	RESISTOR ARRAY	1	
	R9311	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9312	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9315	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9317	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9319	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9321	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9323	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9325	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9326	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9327	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9333	EXB38V103JV	RESISTOR ARRAY	1	
	R9334	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9335	EXB2HV103JV	RESISTOR ARRAY	1	
	R9337	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9341	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9342,43	ERJ2GEJ102X	M 1K OHM J 1/4W	2	
	R9344	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9345	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9348	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9350,51	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
	R9352	EXB2HV470JV	RESISTOR ARRAY	1	
	R9353	EXB38V470JV	RESISTOR ARRAY	1	PAVCA
	R9354	EXB2HV103JV	RESISTOR ARRAY	1	
	R9355	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9358	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9362	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9385	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9578	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9599,00	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
	R9611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9824-26	ERJ2GEJ101	M 100 OHM, J,0.063W	3	
	R9839	EXB38V101JV	RESISTOR ARRAY	1	
	R9840	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9846,47	EXB2HV103JV	RESISTOR ARRAY	2	
	R9848,49	EXB2HV470JV	RESISTOR ARRAY	2	
	R9854	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9859	EXB38V101JV	RESISTOR ARRAY	1	
	R9868	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9869-71	ERJ2GEJ103	M 10KOHM, J,0.063W	3	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9878	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9879	D1BB1302A055	M 13KOHM, 1/10W	1	
	R9886	D1BB4702A055	M 47KOHM, 1/10W	1	
	R9887	D1BB5102A055	M 51KOHM, 1/10W	1	
	R9888	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9889	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9890	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9891	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R9892	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9893	D1BB4302A055	M 43KOHM, 1/10W	1	
	R9894	D1BB2002A055	M 20KOHM, 1/10W	1	
	R9895	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9896	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9897	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9901	D0YAR0000007	M 0 OHM 1/4W	1	
	R9905	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9907	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R9936-39	D1BB1001A055	M 1KOHM, 1/16W	4	
	R9940	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9944-51	EXB38V470JV	RESISTOR ARRAY	8	PAVCA
	R9952-55	ERJ2GEJ470	M 47 OHM, J,0.063W	4	
	R9966	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R9969	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9972-74	ERJ2GEJ103	M 10KOHM, J,0.063W	3	
	R9975	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9980	D0YAR0000007	M 0 OHM 1/4W	1	
	R14349	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14350	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R14351	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14353	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14354	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14356	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14357	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14359	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14360	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14362	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14363	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14365	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14366	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14368	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14369	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14371	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14372	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14374-76	D0GDR00Z0002	M 0 OHM, 1/10W	3	
	R14378	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14380-82	D0GDR00Z0002	M 0 OHM, 1/10W	3	
	R14384	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14386-88	D0GDR00Z0002	M 0 OHM, 1/10W	3	
	R14390	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14392-94	D0GDR00Z0002	M 0 OHM, 1/10W	3	
	R14398	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14901	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R14902-06	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	5	
	R14907-10	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
	R14911-14	D0GD103JA036	M 10KOHM,J,0.25W	4	
	R14915	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14916	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14917	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14919,20	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
	R14921	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	
	R14923-26	D0GD103JA036	M 10KOHM,J,0.25W	4	
	R14928,29	ERJ6GEYJ221V	M 220 OHM,J,1/10W	2	
	R14930	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14931	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R14932	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14934	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14935	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14936	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R14937	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R14939,40	D0GDR00Z0002	M 0 OHM, 1/10W	2	
	R14942	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14943	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R14944	ERJ6GEYJ100V	M 10 OHM,J,1/10W	1	
	R14949	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
	R14950	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14951-55	D0GDR00Z0002	M 0 OHM, 1/10W	5	
	R14956-60	ERJ3GEYJ220	M 22 OHM,J,1/16W	5	
	R14961-63	ERJ6GEYJ331V	M 330 OHM J 1/10W	3	
	R14964	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14965	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14966,67	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
	R14971	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R14973-76	ERJ3GEYJ470	M 47 OHM,J,1/16W	4	
	R14977-79	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	3	
	R14980	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14981,82	D0GD103JA036	M 10KOHM,J,0.25W	2	
	R14984	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14986	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	
	R14987	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14988	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14990	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14991	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14992-94	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
	R14995-98	D0GD103JA036	M 10KOHM,J,0.25W	4	
	R14999	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16002-04	ERJT08J7R5V	M 7.5OHM,J,0.33W	3	
	R16021-24	ERJT08J7R5V	M 7.5OHM,J,0.33W	4	
	R16031,32	ERJ6ENF8202	M 82KOHM, 1/10W	2	
	R16033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16042	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16051	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16102	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16104	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16109	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16110	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16116	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16131,32	D0GD101JA036	M 100 OHM,J,0.25W	2	
	R16134	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16137-39	ERJT08J1R0V	M 1.8OHM,J,0.33W	3	
	R16141	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16142,43	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16151,52	D0GD101JA036	M 100 OHM,J,0.25W	2	
	R16154	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16155	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16159	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16161	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16162,63	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16171	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16172,73	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16181	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16182,83	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16191,92	D0GD101JA036	M 100 OHM,J,0.25W	2	
	R16193	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16194	ERJT14J1R0U	M 1.0 OHM, J,1/4W	1	
	R16195	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16220	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16221	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16231	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16241	EXB38V470JV	RESISTOR ARRAY	1	PAVCA
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16252,53	ERJ6ENF3902	M 39KOHM, 1/10W	2	
	R16254	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16257	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16258	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16261	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16280	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16281	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16282	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16283	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16284	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16289	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16290	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16291	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16292	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16293	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16294	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16295	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16296	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16300	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16301	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16302	ERJ8GEYJ105V	M 1MOHM, J,1/8W	1	
	R16303	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16304	ERJT08J681V	M 680 OHM,F,0.33W	1	
	R16305	ERJ6GEYJ271V	M 270 OHM J 1/10W	1	
	R16306-08	D0GD101JA036	M 100 OHM,J,0.25W	3	
	R16309	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16310	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16311,12	ERJ6GEYJ124V	M 120KOHM,J,1/10W	2	
	R16313	ERJ6ENF6492	M64.9KOHM, 1/10W	1	
	R16314	ERJ6ENF6652	M66.5KOHM, 1/10W	1	
	R16315	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16317	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16321	ERJ6GEYF473	M 47KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16322	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16323	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16324	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16325	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16331	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16333	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16334	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16336	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16338	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16339	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16340	ERJT06J152V	M 1.5KOHM,F,0.25W	1	
	R16401	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16403,04	ERJT08J7R5V	M 7.5OHM,J,0.33W	2	
	R16421	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16423,24	ERJT08J7R5V	M 7.5OHM,J,0.33W	2	
	R16442	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16452	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16467,68	ERJ6ENF8202	M 82KOHM, 1/10W	2	
	R16471	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16472	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16473	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16474	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16475,76	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	2	
	R16477	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R16478	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16479	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16480	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16501,02	D0GD101JA036	M 100 OHM,J,0.25W	2	
	R16503	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16504	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16506	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16507-09	ERJT08J1R0V	M 1.8OHM,J,0.33W	3	
	R16510	ERJT14J1R0U	M 1.0 OHM, J,1/4W	1	
	R16511,12	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16516,17	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16521,22	D0GD101JA036	M 100 OHM,J,0.25W	2	
	R16523	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16531	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16532,33	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16541	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16543	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16551	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16552,53	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16561-64	EXB38V470JV	RESISTOR ARRAY	4	PAVCA
	R16565-68	EXB38V472JV	RESISTOR ARRAY	4	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16573	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16579	EXB38V470JV	RESISTOR ARRAY	1	PAVCA
	R16580	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16582,83	ERJ6ENF3902	M 39KOHM, 1/10W	2	
	R16584	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16586	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16587	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16588	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16590	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16592	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16593	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16600	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16601	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16602	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16603,04	ERJ6GEYJ331V	M 330 OHM J 1/10W	2	
	R16605	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
	R16606	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16607	ERJ6ENF7151	M 7.15KOHM, 1/10W	1	
	R16608,09	ERJT08J102V	M 1KOHM,J, 0.33W	2	
	R16610	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16611	ERG2FJS104E	M 100KOHM, J, 2W	1	PAVCA
	R16612	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16613	ERJ8GEYJ473V	M 47KOHM, J,1/8W	1	PAVCA
	R16615	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
	R16616	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16619	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16622-25	ERJ6GEYJ221V	M 220 OHM,J,1/10W	4	
	R16627-30	ERJ6GEYJ221V	M 220 OHM,J,1/10W	4	
	R16632	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16634	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16635	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16636	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16638	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16639	ERJT14J1R0U	M 1.0 OHM, J,1/4W	1	
	R16641-44	ERJT06J330V	M 33 OHM,F,0.25W	4	
	R16647-50	ERJT06J330V	M 33 OHM,F,0.25W	4	
	R16657	ERJ6GEYG682	M 6.8KOHM,J,1/10W	1	
	R16658	D0D1101JA009	M 100 OHM,J,1W	1	
	R16659,60	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
	R16661	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
	R16662	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
	R16663	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16664	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16665	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16666	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16667	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16668	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16669	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16670	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16671	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16672	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16673	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R16675	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16681-84	ERJT06J100V	M 10 OHM,F,0.25W	4	
	R16686-89	ERJT06J100V	M 10 OHM,F,0.25W	4	
	R16696	ERF5TK2R2	M 2.2 OHM, K, 5W	1	
	R16700	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16701	D0GD103JA036	M 10KOHM,J,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16702	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R16703,04	D0GD103JA036	M 10KOHM,J,0.25W	2	
	R16705,06	D0GD101JA036	M 100 OHM,J,0.25W	2	
	R16707	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16717	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16719-23	ERJ3GEYJ220	M 22 OHM,J,1/16W	5	
	R16729,30	ERJ6GEYF473	M 47KOHM,J,1/10W	2	
	R16731	ERG1FJS823E	M 82KOHM, J, 1W	1	PAVCA
	R16732	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16733	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
	R16734	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R16735-37	ERJ6ENF2213	M 221KOHM, 1/10W	3	
	R16738	ERG1FJS823E	M 82KOHM, J, 1W	1	PAVCA
	R16740	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16742	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16744	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16745	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
	R16746,47	ERJT06J103V	M 10KOHM,F,0.25W	2	
	R16749	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16750	ERJT06J223V	M 22 KOHM, F,0.25W	1	
	R16751	ERJT06J224V	M 220KOHM,F,0.25W	1	
	R16752	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16753	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16756	ERJT06J223V	M 22 KOHM, F,0.25W	1	
	R16757	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16761	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16762	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16763	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16764	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16765	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16766	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16768	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16769	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16771	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16774	ERG1FJS683E	M 68KOHM, J, 1W	1	PAVCA
	R16775	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16776	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16777	ERJT06J151V	M 150 OHM,F,0.25W	1	
	R16778	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16781	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16782	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16783	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16784	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16785,86	ERJ6ENF8202	M 82KOHM, 1/10W	2	
	R16787	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16788	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16789	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16791	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16792	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16794,95	ERJ6ENF2003	M 200KOHM, 1/10W	2	
	R16796	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16797	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16798	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16799	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16801,02	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	2	
	R16804,05	ERJ8GEYJ224V	M 220KOHM, J,1/8W	2	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16807,08	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	2	
	R16810,11	ERJ6ENF1742	M17.4KOHM, 1/10W	2	
	R16813	ERJ8GEYJ102V	M 1KOHM, J,1/8W	1	
	R16814	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R16815	D1BD1002A044	M10.0KOHM, 1/10W	1	
	R16816	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16818,19	ERJ6ENF6802	M 68KOHM, 1/10W	2	
	R16820	ERJ6ENF7872	M78.7KOHM, 1/10W	1	
	R16821	ERJ6ENF1003	M 100KOHM, 1/10W	1	
	R16822,23	ERJ6ENF8202	M 82KOHM, 1/10W	2	
	R16824	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16825	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16826	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16827	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16828	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16831,32	ERJ6GEYJ104V	M 100KOHM,J,1/10W	2	
	R16833	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16834,35	D0GDR00Z0002	M 0 OHM, 1/10W	2	
	R16838	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16841	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16844	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16845	ERJ6ENF5622	M5.62KOHM, 1/10W	1	
	R16846	ERJ6ENF5762	M57.6KOHM, 1/10W	1	
	R16850	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16855	ERG1FJS103E	M 10KOHM, J, 1W	1	PAVCA
	R16856	ERQ12AJW560E	F 56 OHM, J,1/2W	1	
	R16857	ERJ12YJ124U	M 120KOHM, 1/2W	1	
	R16860	D0D28R2JA021	M 8.2 OHM,J,2W	1	
	R16869	ERJ8GEYJ473V	M 47KOHM, J,1/8W	1	PAVCA
	R16870	ERG2FJS333E	M 33KOHM, J, 2W	1	PAVCA
	R16873	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16874	ERJ6ENF7872	M78.7KOHM, 1/10W	1	
	R16875	ERJ6ENF4302	M 43KOHM, 1/10W	1	
	R16878	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16879	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16881,82	D0GBR00Z0002	M 0 OHM J 1/16W	2	
	R16886-88	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
	R17101,02	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17104,05	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17107	D0GF472JA047	M 4.7KOHM,J,0.33W	1	
	R17108,09	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17111,12	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17114,15	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17117,18	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17120,21	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17123,24	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17126,27	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17129,30	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17132,33	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17135,36	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17138,39	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17141,42	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17144,45	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17146,47	EXB38V681JV	RESISTOR ARRAY	2	PAVCA
	R17148,49	D0GBR00Z0002	M 0 OHM J 1/16W	2	
	R17150,51	EXB38V470JV	RESISTOR ARRAY	2	PAVCA
	R17152	EXB38V681JV	RESISTOR ARRAY	1	PAVCA
	R17153	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17154	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R17155-58	EXB38V220JV	RESISTOR ARRAY	4	
	R17159	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17160,61	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17163,64	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17166	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17201,02	EXB38V471JV	RESISTOR ARRAY	2	PAVCA

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17204,05	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17207,08	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17210,11	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17213,14	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17216,17	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17219,20	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17222,23	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17225,26	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17228,29	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17231,32	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17234,35	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17237,38	EXB38V471JV	RESISTOR ARRAY	2	PAVCA
	R17240,41	ERJT14J6R8U	C6.8 OHM, J,1/4W	2	
	R17243	DOGF472JA047	M 4.7KOHM,J, 0.33W	1	
	R17244	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17245	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R17246	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R17247,48	EXB38V470JV	RESISTOR ARRAY	2	PAVCA
	R17249	EXB38V681JV	RESISTOR ARRAY	1	PAVCA
	R17250,51	EXB38V470JV	RESISTOR ARRAY	2	PAVCA
	R17252,53	DOGBR0020002	M 0 OHM J 1/16W	2	
	R17254,55	EXB38V681JV	RESISTOR ARRAY	2	PAVCA
	R17256-59	EXB38V220JV	RESISTOR ARRAY	4	
	R17260-63	ERJ3GEYJ681	M 680 OHM,J,1/ 16W	4	
	R17264	DOGDR0020002	M 0 OHM, 1/10W	1	
	RM2501	PNA4701M07TV	REMOCON RECEIVER	1	
	S2	K1KA02BA0061	2P CONNECTOR	1	
	SC2	K1KA02A00676	2P CONNECTOR	1	
	SC20	K1MN35BA0266	35P CONNECTOR	1	
	SC30	K1KA08AA0190	8P CONNECTOR	1	
	SC41,42	K1KA23AA0733	23P CONNECTOR	2	
	SC46	K1KA09A00239	9P CONNECTOR	1	
	SCMM1	TMME047	CLAMPER	1	
	SCMM4	TMME292	CLAMPER	1	
	SCMM5	TMME260	CLAMPER	1	
	SD1-D4	K1MND6BA0264	6P CONNECTOR	4	
	SD11	K1MN20BA0231	20P CONNECTOR	1	
	SD42	K1KB23AA0234	23P CONNECTOR	1	
	SD46	K1KY09AA0607	9P CONNECTOR	1	
	SS11	K1KA02A00676	2P CONNECTOR	1	
	SS12	K1KA10AA0194	10P CONNECTOR	1	
	SS33	K1KA10A00416	10P CONNECTOR	1	
	SS34	K1KA03AA0193	3P CONNECTOR	1	
	SS35	K1KA04AA0193	4P CONNECTOR	1	
	SS61	K1MN13BA0258	13P CONNECTOR	1	
	SS63,64	K1MN13BA0258	13P CONNECTOR	2	
	SS66	K1MN13BA0258	13P CONNECTOR	1	
	SSMM3,M4	TMME190	CLAMPER	2	
	SU1-U4	K1MND6BA0264	6P CONNECTOR	4	
	SU11	K1MN20BA0266	20P CONNECTOR	1	
	SU41	K1KB23AA0234	23P CONNECTOR	1	
	SW2500	K0F122A00172	SWITCH REMOTE CON- TROLH	1	
	SW3751	EVQPC105K	SWITCH	1	
	SW3753-58	EVQPC105K	SWITCH	6	
	T16301A	ETS19AB249AC	SWITCHING TRANS	1	
△	TU8300	ENGE6608KF	TUNER	1	PAVCA

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	VR16000	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16600	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16602	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
	VR16841	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	X1100	H0J100500035	CRYSTAL	1	
	X2010	H0J245500089	CRYSTAL	1	
	X8001	H0J270500061	CRYSTAL	1	
	X8300	H0J250500079	CRYSTAL	1	PAVCA
	X9000	H2D100500004	CRYSTAL	1	
	X9200	H0J200500076	CRYSTAL	1	
	ZA3701,02	K4CZ01000027	AV TERMINAL	2	
	ZA3801,02	K4AD01D00005	TERMINAL	2	
	ZA4700	K4AZ01D00004	TERMINAL	1	
	ZA4702-08	K4AZ01D00004	TERMINAL	7	
	ZA9000	K4CD01000011	AV TERMINAL	1	
	ZA14901,0 2	K4AD01Z00003	TERMINAL	2	
	ZA14951,5 2	K4AD01Z00003	TERMINAL	2	
	ZA16001- 03	K4CD01000011	AV TERMINAL	3	
	ZA16401- 03	K4CD01000011	AV TERMINAL	3	
	ZA17101	K4AD01Z00001	TERMINAL	1	
	ZA17103- 05	K4AD01Z00001	TERMINAL	3	
	ZA17201	K4AD01Z00001	TERMINAL	1	
	ZA17203- 05	K4AD01Z00001	TERMINAL	3	
△	A601	AYA652MSV8T	ARRESTOR	1	
	C201	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C202,03	ACRR3DD101K7	CERAMIC CAPACI- TOR	2	
	C204	ACMPEF12333H	PLASTIC FILM CAPACITOR	1	
	C205	ACMPEF12393H	PLASTIC FILM CAPACITOR	1	
△	C206	ECKENA101KBR	C 100P 250V	1	
	C207,08	ACCK1B681KP	CERAMIC CAPACI- TOR	2	
	C251	ECQV1H104JL	P 0.1UF, J, 50V	1	
	C252	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C254,55	ECQE2223SKF	PLASTIC FILM CAPACITOR	2	
△	C256,57	EETHC2E821LX	ELECTROLYTIC CAPACITOR	2	
	C301	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C302,03	ACRR3DD101K7	CERAMIC CAPACI- TOR	2	
	C304	ACMPEF12473H	PLASTIC FILM CAPACITOR	1	
	C305,06	ACCK1B331KP	CERAMIC CAPACI- TOR	2	
	C352	ACKZE1E182ST	ELECTROLYTIC CAPACITOR	1	
	C354	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C355	ECQV1H154JL	P 0.15UF, J, 50V	1	
	C357,58	ACKZE1E471ST	ELECTROLYTIC CAPACITOR	2	
	C401,02	ECQE2104SKF	PLASTIC FILM CAPACITOR	2	
△	C403	EETHC2C471HX	ELECTROLYTIC CAPACITOR	1	
	C404	ACKZE1H101T	ELECTROLYTIC CAPACITOR	1	
△	C406	EETHC2A122JJ	ELECTROLYTIC CAPACITOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C409	ECQE2104SKF	PLASTIC FILM CAPACITOR	1	
	C451	ACKZE1A471C	ELECTROLYTIC CAPACITOR	1	
△	C501	ECQU2A103MLA	P 0.01UF, M, 250V	1	
△	C503	ACKMQ2W560T	ELECTROLYTIC CAPACITOR	1	
	C504	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C505	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C506	ACKZE1H100T	ELECTROLYTIC CAPACITOR	1	
	C507	ACKZE1H221T	ELECTROLYTIC CAPACITOR	1	
	C508	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C551	ACKZE1A471C	ELECTROLYTIC CAPACITOR	1	
	C555	ACKZE1E470T	ELECTROLYTIC CAPACITOR	1	
	C557	ECQV1473JM	PLASTIC FILM CAPACITOR	1	
	C558	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C559	ECQV1H474JL	P 0.47UF, J, 50V	1	
	C560	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C600	ACDE2R331KP	CERAMIC CAPACITOR	1	
△	C601	ECQU2A105MLA	PLASTIC FILM CAPACITOR	1	
△	C602	ECQU2A474MLA	P 0.47UF, 250V	1	
△	C603,04	ECKENA221KBR	C 221P 250V	2	
	C605	ACDE1R102K7	CERAMIC CAPACITOR	1	
	C606	AC4MPK105KA3	PLASTIC FILM CAPACITOR	1	
	C610	ECQV1H474JL	P 0.47UF, J, 50V	1	
	C611	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
△	C612,13	ACKMQ2W221L	ELECTROLYTIC CAPACITOR	2	
△	C615	ECKENA221KBR	C 221P 250V	1	
	C625	ACDE1R102K7	CERAMIC CAPACITOR	1	
	C701	ACKZE1A471C	ELECTROLYTIC CAPACITOR	1	
	C702	ECQV1H103JL	P 0.01UF, J, 50V	1	
	C703	ECQV1H224JL	P 0.22UF, J, 50V	1	
	D251	MA165KU	DIODE	1	
	D254	VDD4SBL40	DIODE	1	
	D351	VDG865C08R	DIODE	1	
	D352	VDAG01AT	DIODE	1	
	D353	VDG865C08R	DIODE	1	
	D401	VDD6SBN20	DIODE	1	
	D402	VDAG01AT	DIODE	1	
	D403	VDY901C3R	DIODE	1	
△	D501	VDS1WBA80	DIODE	1	
	D504	VXST3D82BL3	POWER CLAMPER	1	
	D505,06	VDAG01AT	DIODE	2	
	D551	VDRK39A5	DIODE	1	
	D556	VDRF101A2S	DIODE	1	
	D601,02	MA165KU	DIODE	2	
	D603,04	VDAP01CT	DIODE	2	
	D606	VDS3V60L1	DIODE	1	
	D702	VDERA83-004T	DIODE	1	
△	F201	HU216005BEP	CARTRIDGE FUSE (LEADTYPE)	1	
△	F301	HU216005BEP	CARTRIDGE FUSE (LEADTYPE)	1	
△	F501	HU215002BEP	CARTRIDGE FUSE (LEADTYPE)	1	
△	F601,02	HU215010BEP	CARTRIDGE FUSE (LEADTYPE)	2	
	IC251	AN1431TBTA	INTEGRATED CIRCUIT	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC352	AN1431TBTA	INTEGRATED CIRCUIT	1	
△	IC501	MIP3E30MPSCF	IC	1	
	IC555	AN1431TBTA	INTEGRATED CIRCUIT	1	
△	K601	ALKT329C93	RELAY	1	
△	K602	ALDJ5D2T8	RELAY	1	
	L401	AYLH8TB681K	CHOKES	1	
	L402	AYH221012HY	CHOKES	1	
	L501	EXCELSA35	BEAD CHOKES	1	
	L502,03	EXCELDLR35C	BEAD CHOKES	2	
	L551	EXCELDLR35C	BEAD CHOKES	1	
△	L601,02	AYJ3112308Z	FILTER CHOKES	2	
	L603	ETB50CZ14GAD	CHOKES	1	
△	MC201	MDPPNB101	MODULE	1	
△	MC203	MP00R3A1	MODULE	1	
△	MC301	MDPPNB102	MODULE	1	
△	MC352	MDPJFB101	MODULE	1	
△	MC401	MDPPSA101	MODULE	1	
△	MC451	MDPLSB101	MODULE	1	
△	MC501	MDPTZA101	MODULE	1	
△	MC502	MDPHHA101	MODULE	1	
△	MC552	MDPPFC101	MODULE	1	
△	MC601	MDPLPA101	MODULE	1	
△	MC602	MP00P33	MODULE	1	
△	MC603	MP00P30	MODULE	1	
△	MC701	MDPZDA101	MODULE	1	
	P2	AKB2P3-VH-B	CONNECTOR	1	
	P6	AKB12B-EH-A	CONNECTOR	1	
	P7	AKB11B-EH-A	CONNECTOR	1	
△	P9	AKS02B-VT	CONNECTOR	1	
	P11	AKB2P3-VH-B	CONNECTOR	1	
	P12	AKB10B-PH-KS	CONNECTOR	1	
	P25	AKB13B-PH-KS	CONNECTOR	1	
△	PC201,02	VPS2581AL1VH	OPTOISOLATOR	2	
△	PC301,02	VPS2581AL1VH	OPTOISOLATOR	2	
△	PC401	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC501,02	VPS2581AL1VH	OPTOISOLATOR	2	
△	Q301,02	VKFMAL6N55G	FIELD EFFECT TRANSISTOR	2	
	Q351	2SK3704	FIELD EFFECT TRANSISTOR	1	
	Q401	2SK3607	FIELD EFFECT TRANSISTOR	1	
	Q402,03	2SA17670Q2TV	TRANSISTOR	2	
	R202	ERQ14AJ4R7J	F 4.7 OHM, J, 1/4W	1	
	R203,04	ERDS2FJ334	CARBON FILM RESISTOR	2	
	R208	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R215,16	ERG12SJ270J	METAL OXIDE FILM RESISTOR	2	
	R217	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R251	ARRCR1F1303T	METAL GLAZE FIXED RESISTOR	1	
	R252	ARRCR1F1273T	METAL GLAZE FIXED RESISTOR	1	
	R253	ERDS2FJ151	CARBON FILM RESISTOR	1	
	R254	ERDS2FJ102	M 1 KOHM, J, 1/10W	1	
	R256	ER0S2CHD1002	METAL FILM RESISTOR	1	
	R257-59	ERDS2FJ472	CARBON FILM RESISTOR	3	
	R263	ERDS2FJ220	C 22 OHM, J, 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R264	ERDS2FJ102	M 1KOHM, J, 1/10W	1	
	R265	ARRCR1F2373T	METAL GLAZE FIXED RESISTOR	1	
	R266	ARRCR1F3743T	METAL GLAZE FIXED RESISTOR	1	
	R267	ARRCR1F3653T	METAL GLAZE FIXED RESISTOR	1	
	R302	ERQ14AJ4R7J	F 4.7 OHM, J, 1/4W	1	
	R303,04	ERDS2FJ334	CARBON FILM RESISTOR	2	
	R308	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R309,10	ERG12SJ220J	METAL OXIDE FILM RESISTOR	2	
	R311	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R351	ER0S2CHF8871	M8.87KOHM, F, 1/4W	1	
	R352	ARMPC5WR03J	METAL PLATE RESISTOR	1	
	R353	ERDS2FJ561	C 560 OHM, J, 1/4W	1	
	R354	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R355	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R356	ER0S2CHD1021	METAL FILM RESISTOR	1	
	R359	ER0S2CHD5361	METAL FILM RESISTOR	1	
	R362	ERG12SJ332J	METAL OXIDE FILM RESISTOR	1	
	R366	ER0S2CHF6981	METAL FILM RESISTOR	1	
	R367	ER0S2CHF8451	METAL FILM RESISTOR	1	
	R371	ER0S2CHF6981	METAL FILM RESISTOR	1	
	R372	ER0S2CHF33R0	METAL FILM RESISTOR	1	
	R373	ERX12SJ2R2J	METAL FILM RESISTOR	1	
	R403	ERG12SJ100J	METAL OXIDE FILM RESISTOR	1	
	R404	ER0S2CKF6492	M64.9KOHM, F, 1/4W	1	
	R405	ARRF2EJR10B	METAL PLATE RESISTOR	1	
	R409	ERDS2FJ473	C 47KOHM, J, 1/4W	1	
	R411	ER0S2CKF2001	METAL FILM RESISTOR	1	
	R412	ER0S2CKF2001	METAL FILM RESISTOR	1	
	R413,14	ER0S2CHF3162	METAL FILM RESISTOR	2	
	R417,18	ER0S2CHF4422	METAL FILM RESISTOR	2	
	R420	ER0S2CHF5620	METAL FILM RESISTOR	1	
	R421	ER0S2CHF1652	METAL FILM RESISTOR	1	
	R456	ER0S2CKF1332	M13.3KOHM, F, 1/4W	1	
△	R502	ARRCR6J825M	METAL GLAZE FIXED RESISTOR	1	
	R505	ERDS2FJ561	C 560 OHM, J, 1/4W	1	
	R506,07	ARRCR1F8253T	METAL GLAZE FIXED RESISTOR	2	
	R509,10	ARRCR1F8253T	METAL GLAZE FIXED RESISTOR	2	
	R522	ERDS2FJ180	CARBON FILM RESISTOR	1	
	R523,24	ARRCR1F8253T	METAL GLAZE FIXED RESISTOR	2	
	R555	ER0S2CHF1022	METAL FILM RESISTOR	1	
	R557	ERDS2TJ392	C 3.9KOHM, J, 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R558,59	ER0S2CKF1623	M 162KOHM, F, 1/4W	2	
	R560	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R561	ER0S2CHF2152	METAL FILM RESISTOR	1	
	R562	ERDS2FJ150	CARBON FILM RESISTOR	1	
	R563	ERDS2FJ121	CARBON FILM RESISTOR	1	
	R564	ER0S2CHD1002	METAL FILM RESISTOR	1	
	R600	ARR5B100JC2	WIREWOUND RESIS- TOR	1	
△	R601	ARRCR5J624M	METAL GLAZE FIXED RESISTOR	1	
	R603,04	ARRCR1F3093T	METAL GLAZE FIXED RESISTOR	2	
	R607,08	ARRCR1F4993T	METAL GLAZE FIXED RESISTOR	2	
	R611	ER0S2CHF5112	METAL FILM RESISTOR	1	
	R617,18	ARRF2EJR15B	METAL PLATE RESISTOR	2	
	R619	ARRF2EJR10B	METAL PLATE RESISTOR	1	
	R622	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R623	ERG12SJ330J	METAL OXIDE FILM RESISTOR	1	
	R624	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R625	ERG12SJ330J	METAL OXIDE FILM RESISTOR	1	
	R626	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R627	ERG12SJ330J	METAL OXIDE FILM RESISTOR	1	
	R630,31	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	2	
	R632	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	
	R633	ARRCR1F3093T	METAL GLAZE FIXED RESISTOR	1	
	R634	ARRCR1F4993T	METAL GLAZE FIXED RESISTOR	1	
	R701	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R702	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R703	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R704	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R706	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R707	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R712	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R713	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
△	RF601	HUA5MC100JP2	THERMAL CUTOFF WITH RESISTOR	1	
△	T201	ETB50LZ1AGAD	TRANSFORMER	1	
△	T301	ETB50LZ17GAD	TRANSFORMER	1	
△	T501	ETB25AH118AH	TRANSFORMER	1	
	VR251	EVMEASA01B55	VARIABLE RESIS- TOR	1	
	VR401	EVMEASA01B54	VARIABLE RESIS- TOR	1	
△	Z501	ERZVGAD471	VARISTOR	1	
△	Z601	ERZVGED751	VARISTOR	1	
△	Z603	ERZVGAD471	VARISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ZD201	MA4270NM	ZENER DIODE	1	
	ZD203,04	MA4270NM	ZENER DIODE	2	
	ZD251	MA4330NM	ZENER DIODE	1	
	ZD301,02	MA4270NM	ZENER DIODE	2	
	ZD351	MA4330NM	ZENER DIODE	1	
	ZD451	MAZ4068NMF	ZENER DIODE	1	
	ZD501,02	MA4300NM	ZENER DIODE	2	
	ZD503	MA4082NM	ZENER DIODE	1	
	ZD555	MA4330NM	ZENER DIODE	1	
	ZD601	MA4047NM	ZENER DIODE	1	